



Husqvarna PW 360

A truly high performing machine with a robust and purposeful design, for excellent results and demanding jobs such as vehicles and stone walls. A steel reinforced high-pressure hose is included. The Low Force grip activates the trigger with less effort and more comfort. The induction motor and the metal pump ensure a dependable performance and long product lifetime. Transportation is easy thanks to the aluminum carrying handle. Quick hose coupling, large and robust wheels for better traction, and a long spray lance add to the experience. Two swivel functions, for nozzle adjustment and quick connection, prevent hassle. On-board accessory storage, hose reel and power cord storage make operation efficient. Two nozzles and one foam sprayer are included.



Hose reel

Convenient and efficient storage of hose with easy roll-up.



Steel Reinforced High-Pressure Hose

The flexible high-pressure hose is reinforced with steel to give you extra durability, easy handling and a prolonged product lifetime.


Low Force Grip

In this ergonomically designed function, the trigger's activation is perfectly adjusted to your fingers. This means less effort and more comfort for your hand, especially during prolonged use.



Metal Pump

The pump is made of metal to minimise the risk of breakage and to give your product a long lifetime.

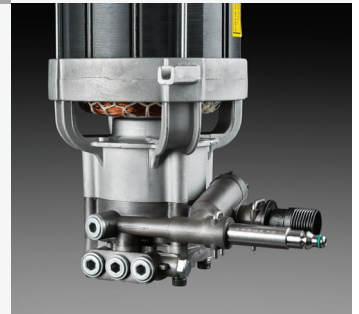

FEATURES

- Less effort and more comfort for your hand
- Extra durability and prolonged product lifetime
- Hose reel with supporting guide
- Gives the product a long lifetime
- High durability and long lifetime
- Makes moving and transport of the machine extra convenient
- Easy movement and reliable traction
- Easy transportation and convenient storage
- Saves time and prevents tangling
- Maximizes efficiency and comfort
- Easy to see the remaining level of detergent and amount used
- More ergonomic working positions
- Increased versatility for a wide range of cleaning tasks
- Easy access and more efficient work
- Targeted high cleaning performance

Technical Specifications	
CAPACITY	
Container capacity	0.5 l
Electric protection class	IP X5
Max pressure	160 bar
Max self-priming suction	1 m
Max. Water inlet temperature	40 °C
DIMENSIONS	
Article gross weight	22800 g
Article net weight	20800 g
Hose length	10 m
Length of cord	5 m
ENGINE	
Electric protection class	IP X5
Frequency	50 Hz
Phases	1
Power rating	2300 W
Rated current	10 A
Voltage	230 V
EQUIPMENT	
Plug	Type M/D - 230 V
PACKAGING	
Packaging height	780 mm
Packaging length	375 mm
Packaging volume	114.08 dm ³
Packaging width	390 mm
Quantity in Master pack	1
Units Per Pallet	6 pcs
MATERIALS	
Master pack: Paper + Cardboard	0 g
Metal total	0 g
Paper + Cardboard total	0 g
PE total	0 g
PET total	0 g
Plastic foil	0 g
Plastic rigid	0 g
Plastic total	0 g
PS/EPS/HIPS total	0 g
SOUND AND NOISE	
Sound power level, guaranteed (LWA)	90 dB(A)
VIBRATIONS	
Hand arm vibration (Aeq)	2.5 m/s ²
Vibration (ah) Vibration max ah	2.5 m/s ²