

## 0901 1064 nm Isolator (HP)

HL2000-S



### 1030 nm Optical Isolator, Single Stage, 800 mW

The isolator is a 1030 nm optical isolator, single stage, 800 mW. It guides optical light in one direction and eliminates back reflection and back scattering in the reverse direction at any polarization state. The devices are characterized with high return loss, high reliability and low insertion loss. It has been widely used in fiber amplifier, testing instrument, MOPA fiber laser & fiber laser.


#### FEATURES

- Low Insertion Loss
- High Return Loss
- High Isolation
- High Stability and Reliability

#### USE IN

- Fiber Amplifier
- Testing Instrument
- MOPA Fiber Laser
- Fiber Laser

#### MECHANICAL DRAWING

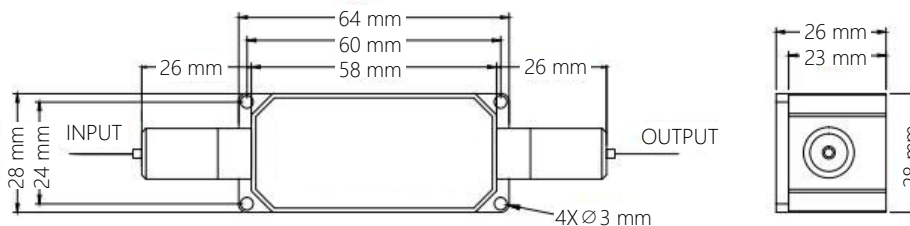

Center Wavelength	1030 nm
Operating Wavelength Range	±5 nm
Peak Isolation	30 dB typ.
Isolation	25 dB min.
Insertion Loss	0.8 dB typ.; 1.0 dB max.
Polarization Dependent Loss, Only for PI	0.15 dB max.
Return Loss (In/Out)	45 dB min.
Average Power Handling	800 mW max.
Dimension	64x28x26 mm
Peak Power for NS Pulse	10 kW max.
Tensile Load	5 N max.
Operating Temperature	+10°C to +50°C
Storage Temperature	0°C to +60°C

\* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, ER is 2 dB lower.

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.

**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**

**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**