

0801 Electro-Optic Modulator

IM-BF2000



Compact Polarizing Intensity Modulator, 3.5 GHz

The 3.5 GHz compact intensity modulator is ideally suited for long-haul transmission and fiber optic sensor application. This modulator operates with a low drive voltage of 3.2 V (V_{pi}), making it compatible with a wide variety of GaAs IC-based drivers. A separate bias port allows the modulator to operate at optimal points of transfer function. In addition, an integrated photodiode simplifies the bias feedback circuit design. It features Proton Exchange (PE) waveguide design, which as a polarizer.



FEATURES

- Low Drive Voltage of 3.2 V (V_{pi})
- Separate Bias Port
- Simplify Bias Feedback Circuit
- Integrated Photodiode
- Proton Exchange (PE) Waveguide Design

USE IN

- Long-haul Transmission and Fiber Optic Sensor Application
- GaAs IC-based Drivers
- Polarizer

RF Performance Parameters

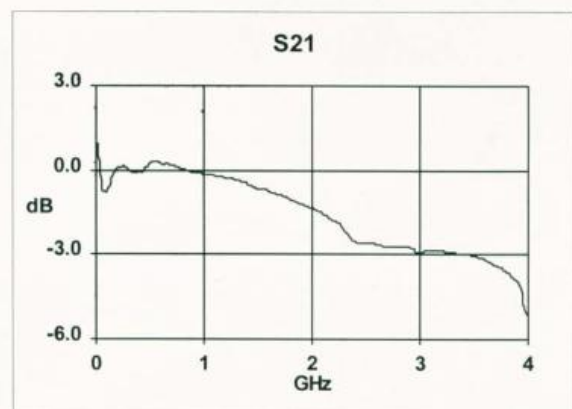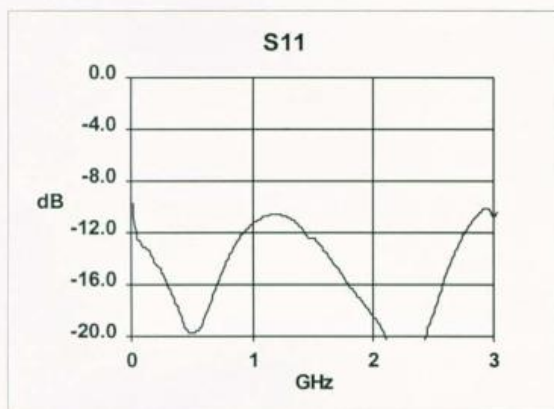

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.

0801 Electro-Optic Modulator

IM-BF2000

Waveguide Process		Proton Exchange (PE)+Titanium Indiffused (TI)
Integrated Photodiode		Yes
Operating Wavelength Range		1530 nm to 1600 nm
Insertion Loss		4 dB max.
On/Off Extinction Ratio		25 dB min.
Optical Return Loss		45 dB min.
Drive Voltage V _{pi}		3.2 V typ.
Electro-optic-bandwidth (-3 dB)		3.5 GHz typ.
RF Return Loss	RF Port	10 dB min. from DC to 3 GHz
RF Input Power		25 dBm max.
RF Impedance		50 Ohm
Drive Voltage V _{pi}	Bias Port	3.3 V typ.
Input Impedance		10 MOhm min.
Input Fiber		PANDA-900 micron Loose Tube
Output Fiber		SMF-28-900 micron Loose Tube
Input Connector		SC/UPC
Output Connector		None
RF Connector		3-pin Feedthrough: Ground-Signal-Ground
Bias Connector		2-pin Feedthrough: Ground-Bias
Dimension		42x10x5.5 mm
Operating Temperature Range		0°C to +70°C
Storage Temperature Range		-40°C to +80°C

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.
1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.
2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.