

# QUADRAFOG<sup>®</sup> AND THUNDERFOG<sup>®</sup>

## SELECTABLE GALLONAGE NOZZLES



FQ125F  
TIP ONLY



FQS125PF

The QUADRAFOG AND THUNDERFOG series are economical and lightweight selectable gallonage nozzles in 1" (25mm), 1.5" (38mm), and 2.5" (65mm) sizes. Models are available in various flow and pressure choices and are suitable for use with low-expansion or multi-expansion foam attachments. All units are NFPA 1964 compliant, include flush without shutting down, and are available in tip-only configurations or with a stainless steel ball shutoff.



FT200F  
TIP ONLY




FTS200PF

### WIDE RANGE OF CONFIGURATIONS



Models are offered in a tip-only (for break and extend operations) or with a stainless steel ball shutoff. Optional colored pistol grips and colored handles are available. Folding pistol grips for tight hose lays are also available. Available with a wide range of inlet connections to meet your needs.


### PRESSURE AND FLOW CHOICES



For use with 1" (25mm) through 3" (75mm) hose lines. Depending upon model, choose from flows that range as low as 5 gpm (20 l/min) up to 250 gpm (1000 l/min) at either 75 psi (5 bar) or 100 psi (7 bar).

See the back of this literature for model overviews.

### DURABLE FOR FIRE SERVICE

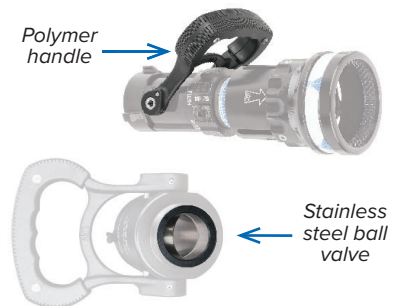

Nozzles are constructed of hard coat anodized aluminum and include a quick-change rear valve seat and stainless steel ball valve. In addition, the selector ring is constructed of aluminum. The super tough polymer handle outlasts metal handles even in extreme conditions.

# 1" (25mm) QUADRAFOG

All 1" (25mm) QUADRAFOGS are available in tip only, break-apart, or 1 piece nozzle models. They are adjustable from a straight stream to a dense fog pattern and are suitable for use with foam. All units have metal cut fog teeth. The DQ40 versions includes four flow settings: 5-10-24-40 gpm @ 100 psi (20-40-90-150 l/min @ 7 bar). The DQ60 versions includes five flow settings: 5-10-24-40-60 gpm @ 100 psi (20-40-90-150-230 l/min @ 7 bar).

DQS40



FQS125LPS



# 1.5" (38mm) QUADRAFOG

All 1.5" (38mm) QUADRAFOGS are available in tip only, break-apart, or 1 piece nozzle models. They are adjustable from a straight stream to a dense fog pattern and are suitable with foam. Nozzles come with the choice of metal cut fog teeth or spinning stainless steel teeth. The standard pressure versions come with four flow settings: 30-60-90-125 gpm @ 100 psi (110-230-360-470 l/min @ 7 bar). Lower pressure versions are also available with the same flow settings at 75 psi (5 bar).

# 1.5" (38mm) & 2.5" (65mm) THUNDERFOG

The THUNDERFOG family consists of 1.5" (38mm) and 2.5" (65mm) nozzles which are available in tip only, break-apart, or 1 piece nozzle models. There is also a 2.5" playpipe version. Nozzles come with the choice of metal cut fog teeth or spinning stainless steel teeth.

FTS250F



**THUNDERFOG**  
offers three  
basic models:

- 1.) 1.5" (38mm), 30-200 gpm (110-750 l/min)** — Ideal for a 1.5" or 1.75" hose line. Six selectable flow settings: 30-60-95-125-150-200 gpm @ 100 psi (110-230-360-470-570-750 l/min @ 7 bar). There is also a lower pressure version at 75 psi (5 bar).
- 2.) 1.5" (38mm), 95-250 gpm (360-1000 l/min)** — Ideal for a 1.5" through 2.5" hose lines. Five selectable flow settings: 95-125-150-200-250 @ 100 psi (360-470-570-800-1000 l/min @ 7 bar).
- 3.) 2.5" (65mm), 95-250 gpm (360-1000 l/min)** — Ideal for a 2.5" or 3" hose line. Five selectable flow settings: 95-125-150-200-250 @ 100 psi (360-470-570-800-1000 l/min @ 7 bar).



**MADE IN USA**

**800 · 348 · 2686**