FOTILE

A BREATH OF FRESH ENGINEERING®

Contact Information:

FOTILE AMERICA LLC.

Add: 6 Campus Dr, Suite 210, Parsippany, NJ 07054

Toll Free: 888-315-0366 Web: us.fotileglobal.com

Media Inquiries: marketing@fotile.com Sales Inquiries: salesusa@fotile.com






















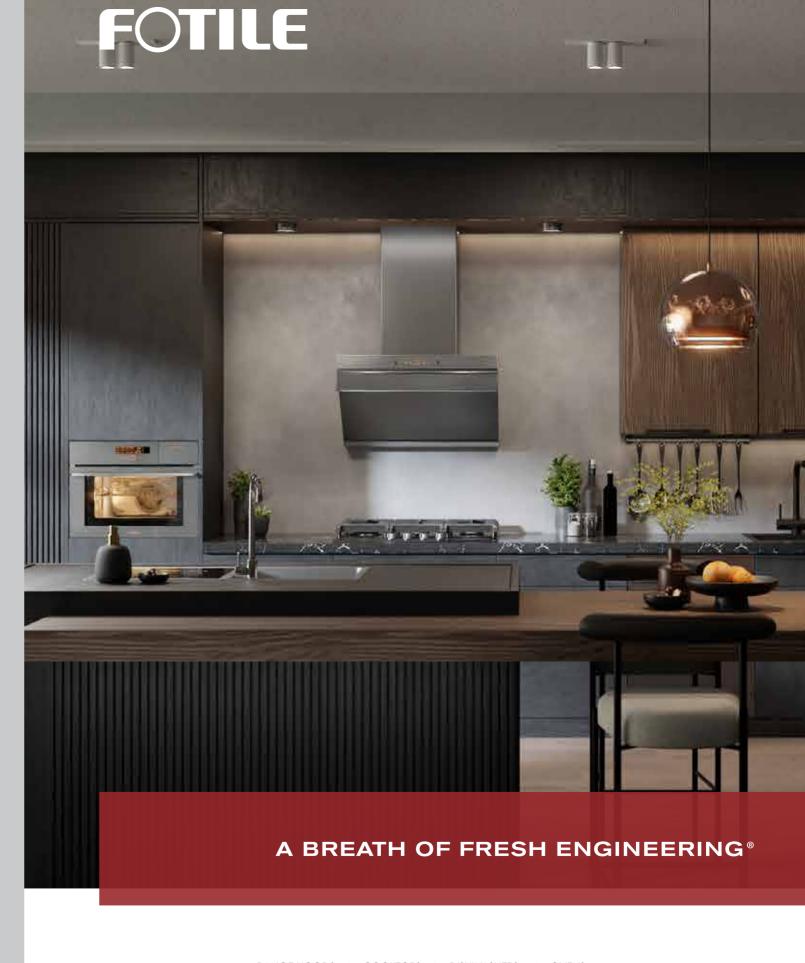

ENHANCING YOUR HOME THROUGH INNOVATION

- Innovation is the core of FOTILE manufacturing
- More than 12,000 national patents including over 2800 invention patents (December 2023)
- Leader in kitchen appliances, FOTILE never stops innovating









GET TO KNOW FOTILE



Established in 1996, FOTILE has been providing high-quality products and services for people worldwide. FOTILE is always exceeding kitchen expectations to support a healthy and environmentally friendly lifestyle for families like yours.

FOTILE is committed to the original aspiration for decades, focusing on the research, development, and manufacturing of high-end kitchen appliances. With innovation and design as the core, FOTILE employs top-tier R&D teams and design talents from around the world, reinvesting no less than 5% of its annual revenue back into Research and Development every year. Today, FOTILE has launched several product lines including range hood, in-sink dishwasher, cooktop, built-in oven and countertop oven, etc.

As a brand that's worth \$2.8 billion, FOTILE is more than a kitchen appliance company. We're an industry leader, and the choice of kitchen appliances for more than 30 million families from over 30 countries. As of December 2023, FOTILE holds over 12,000 patents including over 2800 invention patents.

FOTILE, we're a breath of fresh engineering.

us.fotileglobal.com


1 / FOTILE FOTILE / 2

FOTILE America

Established in 2016 and headquartered in Parsippany New Jersey, FOTILE America is a thriving high-end kitchen appliance manufacturer with operating offices in Los Angeles, San Francisco Bay Area and Houston.

FOTILE is engineered for wellness. Our hearts and minds are with health-conscious home chefs. As a member of the Association of Home Appliance Manufacturer (AHAM), FOTILE advocates for range hood standards to improve kitchen environment. Every FOTILE range hood is certified by California Energy Commission (CEC) and Home Ventilating Institute (HVI), assuring environmentally friendly products with accurate and reliable performance ratings. We're committed to keeping you and your family safe and protected in the heart of the home, your kitchen.

Innovation is the core foundation at FOTILE. With that in mind, FOTILE is constantly exploring cutting-edge technologies on the path toward becoming the world's top kitchen appliances expert. Today, FOTILE has around over 300 located in major cities in the United States with sales doubling for 5 consecutive years. FOTILE also actively partners with U.S. major home appliance retailers, including Lowes, Home Depot, P.C. Richard & Son, RC Willey, etc., offering innovative kitchen appliances to build healthy and happy cooking experiences for all.

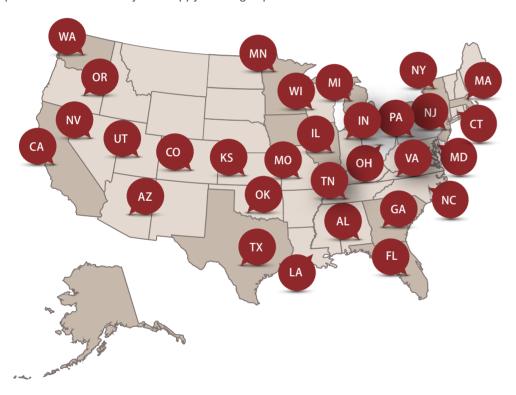

In the Press

Forbes Medium BuzzFeed kitchen observer Living































Founded in 1996 26.5 million sq.ft. Corporate Headquarters



16,000+ Employees. 4 factories. 116 branch offices



Winner of 96 Design awards



Sales in over 30+ countries



FOTILE Brand Value: \$11.17 billion (based on Asiabrand

Assessment method)



≥5% total revenue is reinvested back into R&D



86.000 sa.ft. R&D Facility



Choice of Appliance for more than 30 million families




Over 12,000 Patents, including **2.800** Invention Patents Leading in the industry



36.77% Chinese high-end



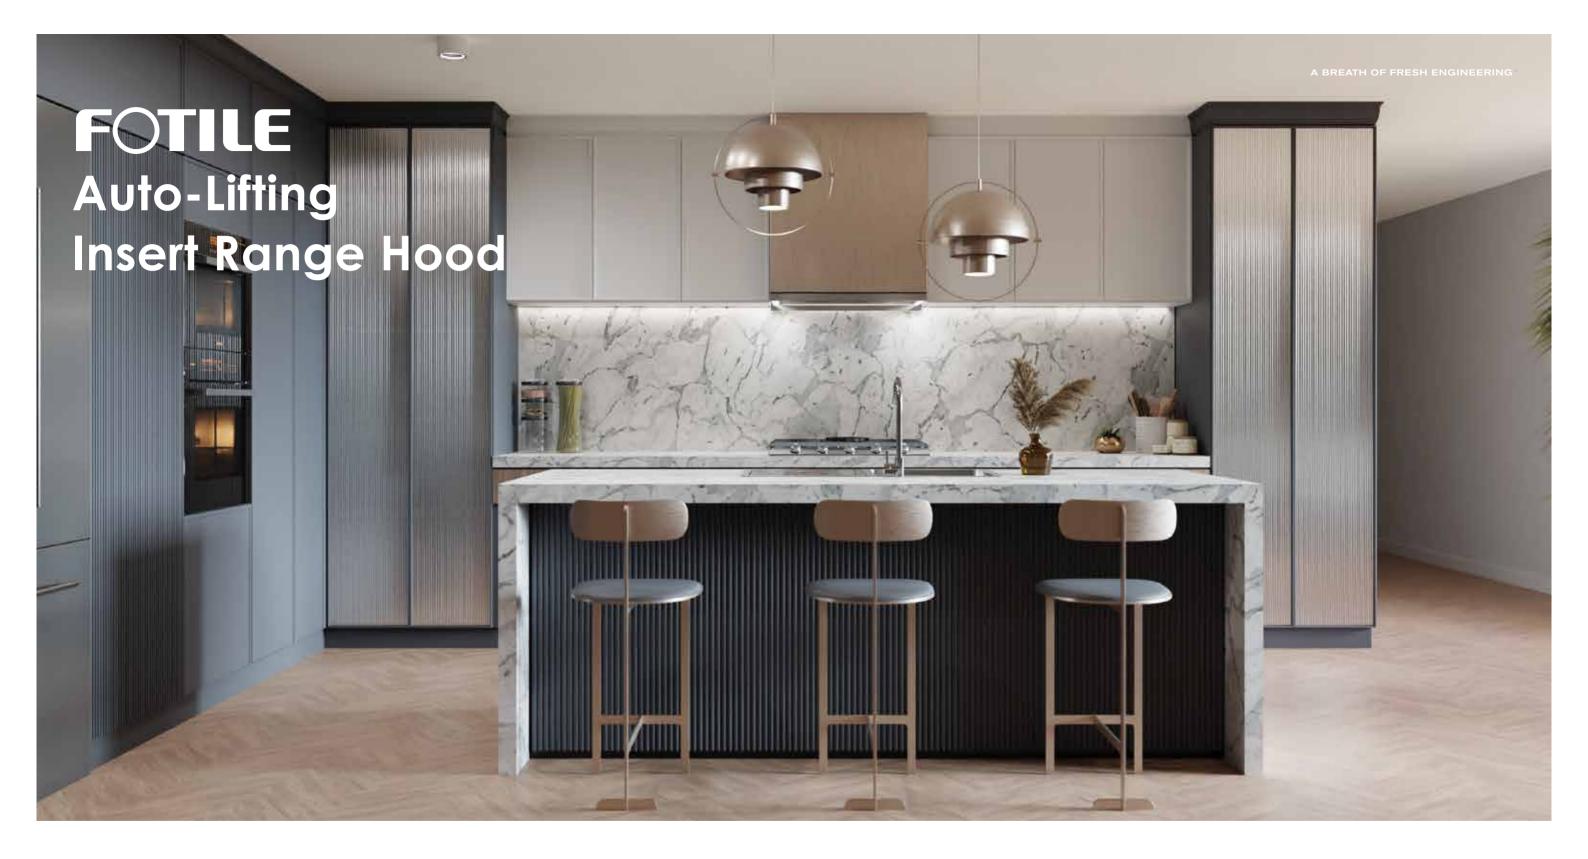



Subtle and unassuming, it effortlessly integrates into the space without contention.

It epitomizes kitchen elegance, capturing the essence of pure beauty; or makes a bold entrance, radiating brilliance with a powerful presence, swiftly clearing away cooking smoke, revealing its hidden charm.

Now, in its clarity, it elevates the spacious ambiance, delivering exceptional performance for an American kitchen taste.





The beauty of craftsmanship, pioneering workmanship, a redefinition of simplicity and practicality



Dual-sided warm white LED lights, bright and soft illumination ensures happy cooking



Exquisite craftsmanship for the collection hood, undergoing meticulous hand polishing numerous times



Smart-Power Engine, with a smaller size and lower noise level, delivers powerful ventilation effects.



Automatic Lift & Lower

Simply wave to lower the range hood, ensuring optimal smoke capture efficiency with closer proximity



Sync Function* with Cooktop

Wirelessly synchronize with compatible FOTILE cooktops for stable, easy connectivity

 $^*\mbox{This}$ feature is available with any $\mbox{\bf FOTILE}$ cooktop that features Sync Function.



Built-in Design

Concealed when idle, offering a high-end and unobtrusive look



Brushless Direct Current Motor

High-load capacity for quieter, more efficient ventilation



Large Capacity Oil Cup

Hassle-free oil management, ensuring a Cleaner space and reduced maintenance

FOTILEAuto Lifting Series




MODEL	BIG3610	
Certification	CSA,FCC	
Dimensions & Weight		
Dimensions (WxHxD)(inch)	35 1/8 x 13 5/8 x 24 13/16	
Duct Size (inch)	6in (vertical)	
Net Weight (lb)	101.4	
Gross Weight (lb)	118.4	
Packing-Box Size (WxDxH) (inch)	41 15/16 × 29 3/4 × 20 5/16	
Technical Specifications		
Motor	DC Motor	
Input Power(W)	300W	
Power Supply	120V/60Hz	
Power Cord	39 3/8in	
Installation	Wall Mounted	
Features & Functions		
Control Type	Motion+Touch Screen	
Sync with Cooktop*	Y	
Max. Static Pressure(Pa)	1,000Pa	
Speed Setting	3 (Low & Middle & High)	
Max. EQUIV. CFM	1,200*	
Noise Level(dB)	34 / 44.1 / 52.7	
Illumination(W)	3W x 2 (LED)	
Delay Shutoff	5min	
Oil Cup	One Oversized Oil Cup	
Oil Filter	Removable & Dishwasher Safe	
Oil Filtration Rate	95%	
Odor Elimination Rate	97%	
Accessories Included	Decorative cover, Filter*2, Bracket, Oil cup	


Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

*The range hood syncs only with FOTILE cooktops featuring the same function. Refer to the cooktop parameter page for the specific models.

Product Dimensions

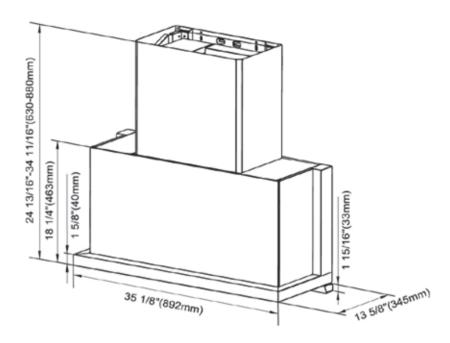

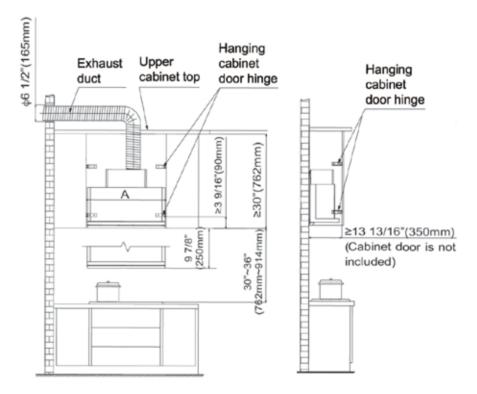

us.fotileglobal.com

9 / FOTILE / 10



11 / FOTILE / 12

41dB ultra-quiet operation keeps you far away from disturbances

DC frequency conversion airflow sounds soft and natural

Bionic impeller keeps airflow smooth and silent

Nautilus-shaped intake chamberreduces obstructions to fume extraction

Quiet Flow arc design so fumes flow smoothly

Bivariate R active noise-cancelling volute tongue for remarkable noise control

360° wraparound micropore technology makes air intake smooth and quiet

Diverse light and shadow illuminates a romantic atmosphere

The dual-sided crystal panel and translucent glass body are made with top-quality materials and craftsmanship. The effect is a refreshing and eye-catching bright appearance. Carefully arranged ambient lights shine through the crystal panel, creating four atmospheric styles: Candlelight, Tranquil, Simple & Elegant, and Lights & Shadows.

Powerful suction and worry-free extraction returns fresh air to the kitchen



Powerful turbo airflow for instantaneous air purification

Newly-designed engine provides surging propulsion that only takes 3 minutes to completely refresh the air in a 215sq.ft room.



100k frequency conversion power drives suction and extraction efficiency

The core technology of FOTILE range hoods is the innovative use of a DC motor. This provides several benefits: increased power, smoother operation, significantly higher output, enhanced extraction efficiency and reliable fume control.



800Pa max static pressure prevents flue blockages

Automatic cruise booster detects flue resistance in real time. It automatically accelerates and pressurizes to deliver a maximum burst of 800Pa ventilation propulsion in quick response to flue obstructions. Fumes are expelled smoothly.

THE COME

A BREATH OF FRESH ENGINEERING®

FOTILE





MODEL	EA06C	
Dimensions & Weight		
Dimensions (WxHxD)(inch)	43 x 16 9/16 x 47 11/16 - 70 7/16	
Duct Size (inch)	6in	
Net Weight (lb)	175.2	
Gross Weight (lb)	241.4	
Packing-Box Size (WxDxH) (inch)	49 5/8 × 21 11/16 × 53 3/16	
Technical Specifications		
Motor	DC Motors	
Input Power (W)	400W	
Power Supply	120V/60Hz	
Power cord	39 3/8in	
Features & Functions		
Ambient Lighting	4 Colors	
Material	Tempered Glass Panel and Stainless Steel Cover	
Max Static Pressure (Pa)	800Pa	
Speed Setting	3+Turbo	
Max Equiv. CFM	1200*	
Noise(dB)	41 / 50 / 55	
Illumination(W)	5W × 2 (LED)	
Night Mode Lighting	N	
Oil Cup	One Oversized Oil Cup	
Oil Filter	Removable & Dishwasher Safe	
Control Type	Touch Screen	
Delay Shutoff	2min	
Stir Fry Mode	Y	
CAT (CFM Adjustment Tech)	N	
Intelligent Air Management	Y	
Smart Smoke Detection	Y	
Cleaning Mode	Y	
Odor Reduction Rate	97%	
Acceptation	Extented decorative cover (optional)	
Accessories	Over-extended decorative cover (optional)	

Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

Product Dimensions

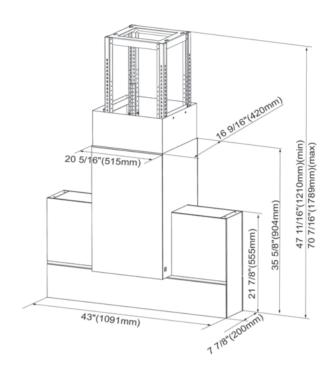

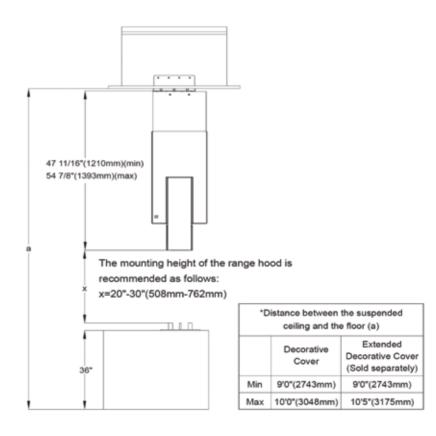

us.fotileglobal.com

15 / FOTILE / 16





Member of HVI, the most authoritative and credible institution in North America

Featuring WhisPower technology, the motors of Pixie Air® Series range hoods are more powerful and operates with minimal noise due to lower resistance and better air flow. The two Capture Shields utilize Coanda & Venturi Effects to maximize extraction power and whisk away smoke, steam, and grease more efficiently.



WhisPower System

High suction power and low noise levels have always been viewed by the industry experts as opposing forces that are difficult to balance. FOTILE's engineers have innovated and developed the WhisPower System, marking a revolutionary innovation. With the WhisPower System, there is no need to compromise on powerful performance. FOTILE has created a range hood that has superior powerful performance, without the loud noise. Now you can prepare your favorite meal while having a casual conversation or listening to music.



850 CFM*

Enabling the entire kitchen to be refreshed in just 1.5 minutes.

* UQG3602/UQG3002: Equivalent to 850 CFM | UQS3001: Equivalent to 800 CFM



Two Motors, Deliver More Power

Twin-turbine centrifugal fans covering a wide cooking area provide a constant flow of suction power.



Super Quiet Operation, as low as 37dB

The FOTILE Pixie Air® has quiet operation, allowing you to have a casual conversation while cooking, or listening to your favorite music.

3.0 Capture Shield **Technology**

Effortlessly Eliminates Smoke and Grease with Minimal Sound

The Pixie Air® is FOTILE's solution to the common problem with under cabinet range hoods - poor ventilation. FOTILE engineers have gone through thousands of experiments in the R&D lab to develop the 3.0 Capture Shield Technology. Its Capture Shield Technology creates Coanda & Venturi Effects* guiding smoke and grease directly into the range hood. This process is what leads Pixie Air®'s superior performance to guickly capture smoke while utilizing high efficiency oil filtration.



Capture Shield Technology

*Coanda Effect: A jet flow attaches itself to a nearby surface and remains attached even when the surface curves away from the initial jet direction.


Venturi Effect: The reduction in fluid pressure that results when a fluid flows through a constricted section (or choke) of a pipe.



Integrated Oil Collection Cup

Cleaning the Pixie Air® is very easy. Simply remove the Capture Shields with integrated oil cups and wipe them clean with a towel and mild dish soap. It's also dishwasher safe!

VENTURI EFFECT



us.fotileglobal.com

19 / FOTILE FOTILE / 20



modell oddeoo

Detail is in Our Design



Motion Activation

Non-contact operation through motion gesture

(UQG3002&UQG3602 Only)



Multi-shift Delay Shutoff

Programmable auto delay shut-off, 5/15/30 min

(UQG3002&UQG3602 Only)



Intelligent Air Management System

Automatically detects and removes harmful gases for peace of mind



600LUX LED Lighting

LED Lighting brightens up your cook top and reproduces the true color of the food.

FOTILE Pixie Air® Series







MODEL	UQS3001	UQG3002	UQG3602	
Dimensions & Weight				
Dimensions (WxHxD)(inch)	29 13/16 x 7 1/8 x 22 1/16	29 13/16 or 35 3/4 x 7 1/8 x 22 1/16	35 3/4 x 7 1/8 x 22 1/16	
Duct Size (inch)	Vertical: Round 7" Horizontal: Rectangular 3 1/4" x 10"			
REC. Mounting Height (from cooktop to the bottom of cabinet)		32"-36"		
Net Weight (lb)	52	54	56	
Gross Weight (lb)	64	66	68	
Packing-Box Size (WxDxH)(inch)	34 1/2 × 15 3/4 × 28 3/4	34 1/2 × 15 3/4 × 28 3/4	40 9/16 x 14 3/16 x 30 3/	
Technical Specifications				
Motor		Dual AC Motors		
Motor Power (W)	256W	260W		
Power Supply		120V/60Hz		
Amps	Max. 1.7A	Max. 2.0	BA	
Power cord		Included		
Features & Functions				
Material	Stainless Steel	Stainless Steel with Tem	pered-glass Panel	
Max Static Pressure (Pa)	340Pa	410Pa		
Speed Setting	3	4		
MAX. EQUIV.CFM	850*	850* 850*		
Air Volume(CFM)(HVI) - Horizontal Air Volume(CFM)(HVI) - Vertical	240 / 370 / 470 240 / 370 / 460	240 / 370 / 460 / 590 240 / 370 / 470 / 600		
Noise(sones)(HVI) - Horizontal Noise(sones)(HVI) - Vertical	2.0 / 4.5 / 5.5 1.1 / 2.5 / 4.0 1.2 / 2.5 / 4.0 / 6.0			
Noise(dB) - Horizontal Noise(dB) - Vertical	38.26 / 45.95 / 51.08 38.20 / 46.01 / 51.25 / 56.10 38.67 / 47.32 / 52.12 38.50 / 46.93 / 51.92 / 57.89			
Illumination (W)		3W × 2 (LED)(5500°K)(avg.600LUX)		
Night Mode Lighting	N	Υ		
Grease Cup		Y (combined with captur-shield, dishwasher safe)		
Oil Filter		Simple to Clean		
Captur-Shield		Professional 3.0 Gen		
Control Type	Soft Touch Buttons	Touch + M	otion	
Delay Shutoff	N 5/15/30min		nin	
Boost	N	Υ		
CAT (CFM Adjustment Tech)	YES** Max.HVI CFM can	be adjusted to under 400CFM by ope	rating the function buttons	
Intelligent Air Management	Automatically detects a	nd removes harmful gasses and vent	s them from your home	
Oil Filtration Rate		94%		
Odor Reduction Rate		99%		
		Recirculation Kit (optional)		
Accessories	Vertical Vent Duct Kit (included)			


21 / FOTILE Us.fotileglobal.com

^{*}FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (6 Sq Ft) and achieve a 94% oil filtration rate, and 99% odor elimination rate, keeping your kitchen smoke free and smelling fresh.


^{**}The FOTILE CAT (CFM Adjustment Tech) function can not be reversed or DEACTIVATED once it is ACTIVATED. When ACTIVATED the CAT feature will reduce the CFM rating according to your local municipality ordinance.

Product Dimensions


(48mm)(UQS3001/UQG3002) 1 15/16"(48mm)(UQS3001/UQG3002) 4 15/16"(125mm)(UQG3602)

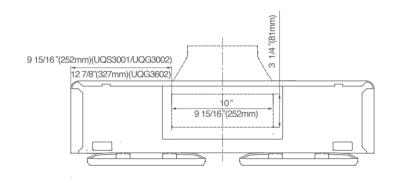

BACK

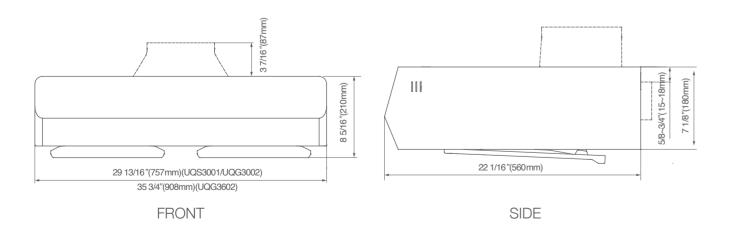

RECIRCULATION KIT USER AND INSTALLATION MANUAL

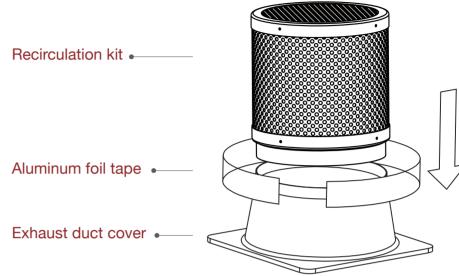

USER INSTRUCTIONS

- Please confirm the interior height of the upper cabinet before installing
 a. If the height is greater than 15 inches, please use the 4 inch exhaust duct cover included in the range hood package
 - b. If the height is between 12-14 inches, you will need a 1 inch exhaust duct cover, which can be purchased at https://us.fotileglobal.com/collections/range-hoods-accessories
 - c. If the height is less than 12 inches, please consult with our customer service team
- Remember to disconnect power to the Range Hood before installing this Recirculation Kit
- Do not try to clean the carbon filter in the recirculation kit. Please replace the charcoal filter every 4-6 months (depending on usage). You can purchase replacement carbon filters at https://us.fotileglobal.com/collections/range-hoods-accessories
- It is recommended to keep the upper cabinet door open during usage
- Please wear gloves when replacing the carbon filters

INSTALLATION STEPS

- Install the exhaust duct cover first
- Insert the recirculation kit into the exhaust duct cover at a 45 degrees angle, and seal the bottom of the kit to the exhaust duct cover with aluminum foil tape

23 / FOTILE Us.fotileglobal.com









reddot design award

U.S. Design Patent

FOTILE Slant Vent Series range hoods provide not only excellent performance, but looks great in any kitchen design. With closer proximity to the cooking surface, and the capture shield opening to 90 degree angle, the engineering of the range hood maximizes coverage area and extraction power, preventing you and your family from breathing in harmful smoke and grease.

25 / FOTILE us.fotileglobal.com FOTILE /26


FOTILE Slant Vent

Under Cabinet/Wall Mounted Range Hood

Designed to keep up with the busiest home kitchens today.








90° Capture Shield

Opens automatically when the range hood is turned on, guiding smoke upwards and creating a barrier to prevent you from breathing in harmful smoke and grease.




FOTILE's Proprietary Double Centrifugal Fan System

Closer proximity to the cooktop surface than traditional range hoods.



Extended Smoke Intake

Spanning evenly from side to side, FOTILE's range hood effectively covers every burner for a clean, smoke-free kitchen.



Expanded Coverage Area

The angled design of the Slant Vent range hoods provides a large ventilation area, proactively drawing in smoke and grease before they can spread. The 30-inch range hood provides coverage for an area measuring 6 square feet, while the 36-inch range hood boasts 7 square feet of coverage.

us.fotileglobal.com

27 / FOTILE FOTILE

29 / FOTILE

Everything You Need In A Range Hood





Exquisite AG Glass

Upgraded 12 processes endure the top-notch Easter texture. The AG(Anti-glare) glass help reduce reflections, improve readability and enhance viewing comfort.

Sync Function

Extra-Large Oil Cup

convenient folding design.

Turn on the cooktop, the range hood will work automatically. Turn off the cooktop, the range hood will off work after 5

Enjoy fresh indoor air without any lingering odors.

Removable, Dishwasher-Safe Filter

Collects grease and oil while you are cooking. A large capacity collection cup requires less frequent cleaning

Cleaning your filter is quick and easy, simply remove it from the range hood and place it in the dishwasher utilizing the





LED Lights

Easily navigate around your stove with up to 500 lux for improved visibility.



Powerful Dual DC Motors The industry's first side-draft range hood with dual DC

motors boasts a maximum static pressure at 540Pa, increasing the effective extraction rate by 30% (Compared to traditional range hoods) and providing low noise levels at 38dB.





Motion Activation

Using infrared connectivity you can simply operate this kitchen range hood with a wave of your hand. This allows you to turn the unit ON or OFF without touching the unit.

Stir-fry Mode

The ultimate weapon against smoke, vapors, and other lingering odors. Whether you are cooking meat, fish, or vegetables, your kitchen will stay fresh and clean.

us.fotileglobal.com

FOTILE Slant Vent Series

31 / FOTILE



MODEL	30in: JQG7507-Y
Certification	ETL, FCC, CEC
Dimensions & Weight	
Dimensions(WxDxH)(inch)	29 7/8 x 18 7/16 x 17 7/16
Duct Size(inch)	6in (vertical)
Net Weight(lb)	64.6
Gross Weight(lb)	78.3
Packing-Box(WxDxH)(inch)	35 1/4 × 22 11/16 × 23 7/16
Technical Specifications	
Motor	Dual DC Motors
Input Power(W)	210W
Power Supply	120V/60Hz
Power Cord	39 3/8in
Installation	Under Cabinet/Wall Mounted
Features & Functions	
Color	MOONSHADOW Grey
Control Type	Motion+Touch Screen
Anti-glare Glass	Υ
Sync with Cooktop*	Υ
Max Static Pressure(Pa)	540Pa
Speed Setting	4 (Low & Middle & High & Stir-fry)
Max. EQUIV. CFM	1100*
Noise Level(dB)	38.5 / 48.3 / 54.0 / 56.5
Illumination(W)	3W × 2 (LED) 500Lux
Delay Shutoff	5min
Oil Cup	One Oversized Oil Cup
Oil Filter	Removable & Dishwasher Safe
Capture Shield	Automatically Open to 90°
Screen Lock	Y
Oil Filtration Rate	95%
Odor Elimination Rate	98%
Accessories Included	Duct kit, Filter, Oil cup, Bracket
Optional Accessories	Decorative cover, Decorative panel

Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.





MODEL	30in: JQG7505 JQG7505-W 36in: JQG9006 JQG9006-W	30in: JQG7501 36in: JQG9001		
Certification	ETL, HVI, CEC	ETL, HVI, CEC		
Dimensions & Weight				
Dimensions(WxDxH)(inch)	30in: 29 7/8x 18 7/16 x 17 7/16 36in: 35 7/8x 18 7/16 x 17 7/16	29 7/8 x 18 7/16 x 17 7/16		
Duct Size(inch)	6in (vo	ertical)		
Net Weight(lb)	30in: 64.6	36in: 70.1		
Gross Weight(Ib)	30in: 78.3	36in: 91.9		
Packing-Box(WxDxH)(inch)	30in: 35 1/4 × 22 11/16 × 23 7/16 36in: 43 5/8 × 26 3/4 × 27 3/8	30in: 33 9/16 × 22 11/16 × 23 7/8 36in: 43 5/8 × 26 3/4 × 27 3/8		
Technical Specifications				
Motor	Dual DC Motors	Dual AC Motor		
Input Power(W)	210W	256W		
Power Supply	120V	/60Hz		
Power Cord	393	3/8in		
Installation	Under Cabinet	t/Wall Mounted		
Features & Functions				
Color	Onyx Black I Elegant White	Onyx Black		
Control Type	Motion+Touch Screen	Touch Screen		
Sync with Cooktop*	N	N		
Max Static Pressure(Pa)	540Pa	400Pa		
Speed Setting	4 (Low & Middle & High & Stir-fry)	3 (Low & Middle & High)		
Max. EQUIV. CFM	1000*	850*		
Air Flow(CFM)(HVI)	220 / 410 / 520 / 580	230 / 400 / 520		
Noise Level(sones)	30in: 1.2 / 4 / 6.2 / 7.5 36in: 1.2 / 4 / 6.5 / 7.5	1.2 / 4 / 6.0		
Noise Level(dB)	38.5 / 48.3 / 54.0 / 56.5	39 / 49.2 / 54.3		
Illumination(W)	3W × 2 (LE	ED) 500Lux		
Delay Shutoff	2n	nin		
Oil Cup	30in: One Oversized Oil C	up 36in: Two Oil Cups		
Oil Filter	Removable & D	ishwasher Safe		
Capture Shield	Automatically	Open to 90°		
Screen Lock	,	Y		
Oil Filtration Rate	95	5%		
Odor Elimination Rate	98	%		
Accessories Included	Duct kit, Filter,	Oil cup, Bracket		
Optional Accessories	Decorative cover, Decorative panel			

Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

us.fotileglobal.com FOTILE/32

^{*}The range hood syncs only with FOTILE cooktops featuring the same function. Refer to the cooktop parameter page for the specific models.

^{*}The range hood syncs only with FOTILE cooktops featuring the same function. Refer to the cooktop parameter page for the specific models.

FOTILESlant Vent Series




MODEL	30in: JQG7522 (E-commerce Only)		
Certification	ETL, HVI, CEC		
Dimensions & Weight			
Dimensions(WxDxH)(inch)	29 7/8 x 18 7/16 x 17 7/16		
Duct Size(inch)	6in (vertical)		
Net Weight(lb)	63.9		
Gross Weight(Ib)	75.8		
Packing-Box(WxDxH)(inch)	30in: 33 9/16 × 22 11/16 × 23 7/8 36in: 43 5/8 × 26 3/4 × 27 3/8		
Technical Specifications			
Motor	Dual AC Motor		
Input Power(W)	256W		
Power Supply	120V/60Hz		
Power Cord	39 3/8in		
Installation	Under Cabinet/Wall Mounted		
Features & Functions			
Color	Onyx Black		
Control Type	Push Buttons		
Sync with Cooktop*	N		
Max Static Pressure(Pa)	400Pa		
Speed Setting	3 (Low & Middle & High)		
Max. EQUIV. CFM	850*		
Air Flow(CFM)(HVI)	230 / 400 / 520		
Noise Level(sones)	1.2 / 4 / 6.0		
Noise Level(dB)	39 / 49.2 / 54.3		
Illumination(W)	3W × 2 (LED) 500Lux		
Delay Shutoff	2min		
Oil Cup	One Oversized Oil Cup		
Oil Filter	Removable & Dishwasher Safe		
Capture Shield	Fixed Open		
Screen Lock	N		
Oil Filtration Rate	95%		
Odor Elimination Rate	98%		
Accessories Included	Duct kit, Filter, Oil cup, Bracket		
Optional Accessories	Decorative cover, Decorative panel		

Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors


*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

Slant Vent Range Hoods Dimensions


Unit: inch

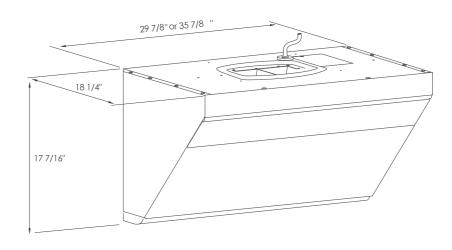

Product Dimensions








us.fotileglobal.com

33 / FOTILE / 34

^{*}The range hood syncs only with FOTILE cooktops featuring the same function. Refer to the cooktop parameter page for the specific models.









FOTILE's Perimeter Vent Series features auto-turbo mode that allows the range hood to intelligently adjust the operation to cope with the extraction environment. The innovative Capture Shield Technology provides powerful extraction more evenly. Adapting a three-step purification technique, FOTILE Perimeter Vent Series can achieve a 98% odor reduction from surrounding air and a 92% separation of grease and fumes (feature varies by models).



$3_{\rm in}/{\rm Quiet,\,Low\text{-}Speed\,Extraction}$

Even the simplest recipes sometimes produce smoke and other unpleasant odors. FOTILE's Intelligent self adjusting Capture Shield keeps your kitchen clean and fresh by trapping smoke vapors and removing them. Using smart sensors, the Capture Shield automatically sets fan speed accordingly while lowering the Capture Shield height by 3.2 inches for quick, effortless ventilation.

Sleek, Modern Design

When turned OFF, the self adjusting Capture Shield and the innner smoke chamber are automatically tucked inside the unit's flat configuration, creating an elegant, modern design.



Smart Smoke Detection

For fast, thorough extraction, your FOTILE range hood's Intelligent Capture Shield automatically adjusts its elevation, lowering between 3.2-4.7 inches, based on the volume of smoke, grease, and vapor detected. Smoke has virtually no chance of escaping!



47 / Heavy-Duty Extraction Ideal For Heavy Smoke And Grease

Cooking with high-heat, stir-frying, and deep frying are all great examples of cooking styles that can quickly cause a kitchen to fill up with smoke. Thankfully, FOTILE Perimeter Vent Series Range Hoods are designed to respond to high amounts of smoke by increasing the fan speed and dropping the Capture Shield by 4.7 inches to proactively remove smoke and other harmful odors.

* Intelligent Adjustable Capture Shield available on EMG9050 only Manual Adjustable Capture Shield available on EMS09026 only





Smart Smoke Detection. Intelligent Suction. No More Stray Smoke.

FOTILE Perimeter Vent Series range hoods offer intelligent functionality to adjust speed and height settings automatically, based on the volume of smoke and odors in your kitchen.



Auto Turbo System

If, at any point during the ventilation process, the FOTILE range hood detects resistance, the unit will automatically switch to its most powerful mode for maximum extraction capacity.



High-speed centrifugation self-cleaning technology

The motor spins just like a helicopter propeller, swiftly removing oil stains at high speed. Through the design of the oil guide structure, the oil stains are directed into the oil cup.

us.fotileglobal.com

39 / FOTILE FOTILE / 40

FOTILE Perimeter Vent Series









MODEL	EMG9050	EMS9026	EMG9030(E-commerce Only)	EMG7508
Certification	ETL, FCC, HVI, CEC	ETL, HVI, CEC	ETL, HVI, CEC	ETL, HVI, CEC
Dimensions & Weight				
Dimensions(WxDxH)(inch)	35 7/16 x 20 1/2 x 25 7/16 - 38 7/8	35 7/17 x 20 5/16 x 27 - 39 9/16	35 7/16 x 20 5/16 x 27 - 38 5/8	29 7/8 x 21 5/16 x 23 7/16 - 40 11/16
Duct Size(inch)		6in (vertical)	
Net Weight(lb)	75.6	72.8	76	60.4
Gross Weight(lb)	92.1	87.7	95.5	75.0
Packing-Box(WxDxH)(inch)	39 5/8 × 27 9/16 × 24 13/16	39 5/15 ×20 5/16 × 25 1/4	39 5/8 × 29 3/8 × 24 1/4	33 11/16 × 27 3/8 × 24 13/16
Technical Specifications				
Motor	DC Motor	AC Motor	39 5/8 × 29 3/8 × 24 1/4	DC Motor
Input Power(W)	310W	310W	262W	290W
Power Supply		120V	/60Hz	
Power Cord		393	3/8in	
Installation		Wall N	lounted	
Features & Functions				
Control Type	Motion+To	uch Screen	Touch	Screen
Sync Function	Υ	N	N	N
Max Static Pressure(Pa)	1,000Pa	500Pa	690Pa	1,000Pa
Speed Setting	2 (Low & High) + Auto	3 (Low & High + Turbo)	2 (Low & High) + Auto	4 (Low & Middle & High & Stir-fry)
Max. EQUIV. CFM	EQUIV. CFM 1,300*		1100*	1,200*
Air Flow(CFM)(HVI)	280 / 450 / 620 / 700	360 / 450 / 560	280 / 420 / 520 / 660	280 / 420 / 540 / 650
Noise Level(sones)	0.6 / 3.4 / 6.1 / 7.7	2/4/7	1.2 / 3.5 / 5.5 / 7.5	1/4/6/8
Illumination(W)	5W x 1 (LED)	2W x 1 (LED)	2W × 2 (LED)	3W × 2 (LED)
Delay Shutoff	5min	2min	2/5/10min	2min
Oil Cup		One Oversized Oil Cup		One piece combined with captur sheild
Oil Filter		Removable & D	Dishwasher Safe	
Capture Shield	Intelligent Self-Adjusting	Manually Adjustable	Intelligent Self-Adjusting	Fixed
Screen Lock	N	N	N	Υ
Auto Smoke Detection	Y	N	Υ	N
Oil Filtration Rate	94%	92.50%	92%	95%
Odor Elimination Rate	98%	98%	98%	97%
Accessories Included	Decorative co	Decorative cover, Duct kit, Filter, Oil cup, Bracket, Captur Sheild		Decorative cover, Duct kit, Filter, Bracket, Captur Sheild
Optional Accessories		Long decorative cover, Ext	ented long decorative cover	


Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

A BREATH OF FRESH ENGINEERING®


EMG9050

EMG7508

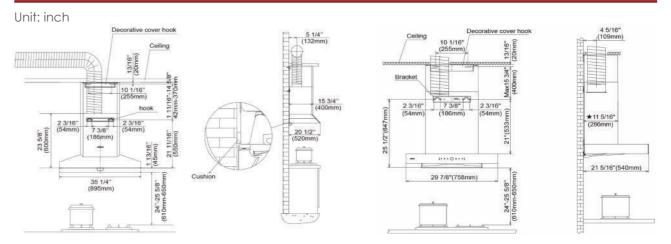


EMG9030

Unit: inch





Hole dimension of the upper cabinet or suspended ceiling



EMS9026

Unit: inch





us.fotileglobal.com

41 / FOTILE / 42



Clean filtration for freshness you can smell

Step1

Capture Shield filters grease



Step2

Grease is trapped by the aluminum filter



Step3

Carbon filter captures any remaining grease and eliminates adolurs



Clean Air Filtration Technology produces a Fresh Clean Kitchen with Healthy Air

Dual Fresh Air Filters Eliminate Odors and Grease – Fotile's dual filter technology works seamlessly together utilizing a grease capture filter as well as a Carbon Filter for Odor elimination leaving your kitchen smelling fresh and

1. Powerful Grease Filtration and Odor Elimination

- After hundreds of tests, we found the ideal thickness for the carbon filter to be 20mm. This allows for high-efficiency filtration without hindering airflow through the duct.
- By using 50% activated carbon in our filter, we achieve better particulate filtration while absorbing more fumes.

2. Extra Long-Lasting Carbon Filter Reduces Replacement and Extends the Life

- With our Front grease filtration design, we centralize grease filtration which lowers the ability for the grease to adhere to the carbon filter, making it last 3X longer.
- ② By utilizing a 10mm mesh grease filter, this ensures grease drippings cannot stick to the carbon filter which extends the life of the carbon filter.

us.fotileglobal.com

FOTILE Perimeter Vent Series




MODEL	EMS6008-CR	
Certification	ETL, HVI, CEC	
Dimensions & Weight		
Dimensions(WxDxH)(inch)	23 7/16 x 20 9/16 x 29 9/16 - 35 11/16	
Duct Size(inch)	Ductless	
Net Weight(Ib)	54.3	
Gross Weight(lb)	66.1	
Packing-Box(WxDxH)(inch)	30 1/8 × 23 7/16 × 24 1/16	
Technical Specifications		
Motor	DC Motor	
Input Power(W)	200W	
Power Supply	120V/60Hz	
Power Cord	39 3/8in	
Installation	Wall Mounted	
Features & Functions		
Control Type	Touch Screen	
Sync Function	N	
Max Static Pressure(Pa)	1,000Pa	
Speed Setting	4 (Low & Middle & High & Stir-fry)	
Max. EQUIV. CFM	1,200*	
Air Flow(CFM)(HVI)	280 / 420 / 540 / 650	
Noise Level(sones)	1/4/6/8	
Illumination(W)	3W × 2 (LED)	
Delay Shutoff	2min	
Oil Cup	One piece combined with captur sheild	
Oil Filter	Removable & Dishwasher Safe	
Capture Shield	Fixed	
Screen Lock	Υ	
Auto Smoke Detection	N	
Oil Filtration Rate	95%	
Odor Elimination Rate	97%	
Accessories Included	Decorative cover, Duct kit, Wind-guidance Box, Mesh filter, bracket, Captur sheild with racket	
Optional Accessories	Mesh filter, Carbon filter, Long decorative cover, Extented long decorative cover	

Warranty: 2-Year Labor I 5-Year (Limited) PARTS I Lifetime (Limited) Motors

*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a ~92% oil filtration rate, and ~98% odor elimination rate, keeping your kitchen smoke free and smelling fresh.

EMS6008-CR

Unit: inch

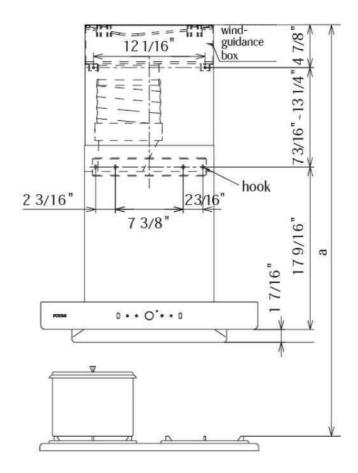

a=43"~44 5/8" (in USA) a=44 5/8"~46 9/16" (in Canada)

us.fotileglobal.com

45 / FOTILE





FOTILE's Tri-Ring gas cooktop is designed for efficient and versatile cooking. A 22,000 BTU center mounted Tri-Ring burner works wonderfully whether you are looking to power boil water, or need high intense heat for sautéing, searing, or stir frying on the included wok grate. A dedicated 3,000 BTU Simmer burner allows for accurate and consistent heat for delicate cuisines, and the two left burners deliver 13,000 BTUs each, offering optional griddle control.

Featuring a Flame Failure Detection System, the safety device in the cooktop will be activated and automatically cut off the gas supply if the flame goes out accidentally.

47 / FOTILE / 48



Professional Tri-Ring **High Output Center Burner**

Compared with the double-ring burner, the professional tri-ring burner not only delivers higher heat, but also can heat up the bottom of pots and pans

Whether stewing or frying, high or low fire, the tri-ring burner can heat up the food evenly and help you avoid the dilemma of uneven cooked food. You can adjust the three flame rings synchronously by rotating the knob clockwise, and increase or decrease the number of flame rings by rotating the knob counterclockwise. Flexible heat control helps you deliver outstanding cooking results.





Brass Burner Cap

Brass Burner Head

Brass Burners

Both burner heads and burner caps are made of brass. which has better thermal conductivity than aluminum-al-

Burners made of brass are not only outstanding in appearance, but also not easy to deform under high temperature, and therefore are much more durable.

us.fotileglobal.com



Dedicated simmer burner

Looking to put a soup on simmer, or heating up delicate sauces so they stay hot, but do not burn? The FOTILE Tri-Ring Cooktop has a dedicated Simmer burner capable of 3,000 BTU. This low power burner is ideal for simmering or heating delicate sauces with accurate consistent low temperature so they will not burn.



22,000 BTU high heat + wok grate

Whether you want to make an Asian-style stir fry, or sear a steak in a hot pan, the Tri-Ring Cooktop can help you deliver outstanding results.



Two burners with the same specifications designed to perfectly accommodate a ariddle

When cooking food like a whole fish or fillet of steak, a rectangular griddle pan can come in handy. The two left burners of the Tri-Ring cooktop have the same specifications, delivering 13,000 BTU each. They also accommodate an optional griddle with a pre-set griddle temperatue setting on the control knob.

optional purchase for GLS30501 only

FOTILE / 50

A Cooktop that Gives You the Peace of Mind



Flame Failure Protection

Are you worrying about gas leakage if the burner flames go out accidentally? The Flame Failure Device will automatically cut off the gas supply in case the flame goes out.



Smooth Slim-Line Surface Finish

The cooktop features a super slim design with round edges for a premium look and feel.



Insulated Materials for Added Safety

The core material of our cooktop knobs are made from insulated material that helps to reduce heat transfer and prevent overheating knobs while cooking. In addition, they are also insulated from electrical shock in case you were to leak any liquids into your cooktop. This insulated material is for your added safety.



Well Thought Out in Every Detail

Easy To Clean

The Tri-Ring Cooktop is super easy to keep clean. All the edges of the cooktop panel are rounded so no food or debris can get trapped underneath and easily be removed. All the cooking knobs, burners, and grates are fully removable for easy cleaning with a damp towel and mild dish soan.

Fast Ignition

The Tri-Ring Cooktop adopts independent fast ignition systems for each burner. Just press, turn, and release the knob and the burner will light immediately.



We use Cast Iron cooking grates that run from edge to edge on the cooktop. This means, you will always have space to put small and large pots and pans no matter what size or shape they are. It also allows you to move a hot heavy pot easily and safely from one burner to another if you need to.

Continuous edge to edge cooking grates makes it easier to cook on your cooktop's surface. Simply slide your heavy pots and pans to a different burner without picking them up. Cast Iron grates also offer long lasting performance.









Sophisticated craftsmanship

With a clean look, the cooktop can fit seamlessly into kitchen countertops.



Compatible with many types of pots and pans

Works with all sizes of pots and pans.



Childproof lock

The burner will be ignited when the knob is pressed to the maximum position. The lock is designed to prevent children from turning on the cooktop accidentally.

us.fotileglobal.com

51 / FOTILE

FOTILE Tri-Ring Series

53 / FOTILE











MODEL	GLS30501	GLS36502	GLG30401-Y	GLG30301			
Certification	ETL CSA		CSA	CSA			
Dimensions & Weight							
Product Dimensions (WxDxH)(inch)	30 x 21 x 5 1/4	36 x 21 x 6	30 x 21 x 6				
Cut-out Dimensions (WxD)(inch)	28 1/2~29 x 19 5/8~20 1/8 33 7/8~35 x 19 1/8~20 1/2 28 1/2~29 x 19 5/8~20 1/8						
Net Weight(lb)	48	59.5	58	57.3			
Gross Weight(lb)	57.5	70.5	68.3	67.7			
Packing-Box Dimensions (WxDxH)(inch)	34 5/16 x 25 1/4 x 9 11/16	40 x 25 3/16 x 11 13/16	35 7/8 x 25 1/4 x 9 7/8	35 7/8 x 25 1/4 x 9 7/8			
Appearance Material							
Panel Material/Color	Stainle	ss Steel	MOONSHADOW AG Glass	Onyx Black Tempered Glass			
Grate Meterial		Cast	t Iron				
Burner Material		Aluminiu	ım, Brass				
Knob Meterial	Kirsite	, Nylon	Ny	lon			
Technical Specifications	ifications						
Fuel Type		Natural Gas (Factory Set)					
Burner Type		Sealed	Burner				
No. of Burner		5	4	3			
	Front center to rear center:	Front center to rear center:	:				
Burner Interval	7 1/2" Left center to right center: 19 1/16"	7 1/2" Left center to right center: 23 1/16"	Left center to right center: 20"				
Heating Load(BTU)	Center: 22K(Tri-Ring) Center: 2 BTU) LF/LR: 13K LF/L RR: 3K RF: 6K RR: 3		L: 18K(Tri-Ring) R: 13.2K MF: 3K MR: 5.8K	L: 18K(Tri-Ring) M: 5.8K R: 13.2K			
Total Putput(BTU)	57	7K	40K	37K			
Wall Oven Compatible		,	Y				
Power Supply		120V, 60	DHz, 15A				
Power Cord		39 13	3/16in				
Features & Functions							
		Conti	nuous				
Full-Width Grates	Y						
			Y				
Fast Ignition			Y Y				
Full-Width Grates Fast Ignition Flame Failure Device Accessories Included			Y Wok Tea Ket	Grate tle Grate Invert Kit			

Installation Information:

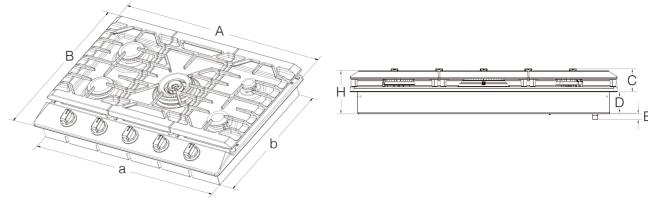

	F	Product Dimension	าร	Cut-out D	imensions			_
(inches)							D	Е
	Product Width	Product Depth	Product Height	Cut-out Width	Cut-out Depth	Product Above Countertop	Chassis Height	Manifold Pipe
GLS30501	30	21	5 1/4	Min.28 1/2 Max.29	Min.19 5/8 Max.20 1/8	2 3/4	2 1/2	15/16
GLS36502	36	21		Min.33 7/8 Max.35	Min.19 1/8 Max.20 1/2	2 3/4	3 1/4	15/16
GLG30401-Y	30	21	6	Min.28 1/2 Max.29	Min.19 5/8 Max.20 1/8	3 1/8	3 1/4	15/16
GLG30301	30	21	6	Min.28 1/2 Max.29	Min.19 5/8 Max.20 1/8	3 1/8	3 1/4	15/16

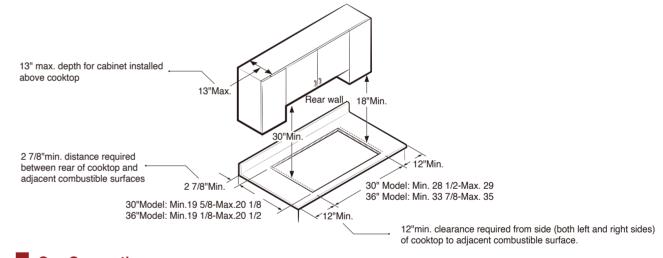


Gas Connection:

Suggested Installation with No Appliance obstruction below the countertop

A. Manifold pipe B. Regulator provided with unit: • Outlet - 1/2" NPT female pipe thread • Inlet - 1/2" NPT female pipe thread C. Adapter • Outlet - 1/2" NPT female pipe thread • Inlet - 3/8" NPT female pipe thread D. Flexible connector E. Adapter F. Manual shut-off valve G. Gas pipe	A B B C D C D C D C D C D C D C D C D C D

Suggested installation to avoid appliance interference below cooktop



^{*} FOTILE gas cooktops are manufactured and shipped to be used with natural gas. If you want to use LPG, please convert the cooktop to LPG following the instructions in the Installation Manual.

us.fotileglobal.com

FOTILE / 54

00000

FOTILE EPS Series Cooktop

Maximizing Efficiency, Power, and Safety, FOTILE's EPS combines everything you are looking for in a cooktop. Featuring a 12-step safety protection system, FOTILE's EPS cooktops help to prevent fire hazards and harmful gas Leaks from adversely affecting your family's health. The heating efficiencies of our EPS cooktops are about 50% higher than average, making this series an economical choice. Available in stainless steel and black tempered glass, you can always find the unit that suits your kitchen.

EPS | EFFICIENT

Step 3 | Efficient Combustion

Utilizing larger size flame ports around the burner and oxygen flame cap, this ensures the proper level of air intake through the inlets, maximizing the cooktop's efficiency.





Step 2 | Large Premix Compartment

Acts as a gas reservoir, letting in oxygen to combine with the fuel, and then releasing the mixture in a steady, unbroken stream.






Step 1 | Jet Collision Technology

Initiates a high-speed collision of gas and oxygen within the extended chamber, ensuring thorough mixing for a steady flame.







us.fotileglobal.com






Model	GAG86309	GAG76202	
Certification	ETL	ETL	
Product Dimensions(WxD)(inch	33 7/8 x 19 11/16	29 15/16 x 17 9/16	
Cut-Out Dimensions(WxD)(incl	27 7/8 x 15 5/16		
Power Supply	Battery	Battery	
No. of Burners	3	2	
Panel Material	Tempered Glass	Tempered Glass	
Grate Material	Cast Iron Cast Iron		
Heating Load(BTU)	L: 14,800 M: 5,800 R: 14,800	L: 14,800 R: 14,800	
	≥60%	≥60%	
Heating Efficiency	Efficient Heating Load nearly 9,000 BTU, 10% higher than other products		
Fast Ignition	V	V	
Net Weight(lbs)	39.7	24.3	
Gross Weight(lbs)	44.1	28.6	
Packing-Box Size (WxDxH)(inch)	35 7/8 x 21 1/2 x 8 5/16	32 5/16 x 20 5/8 x 8 3/4	
Warranty	1-Year Labor & 5-Year (Limited) Parts		

Unit: inch









12 built-in safety features for added reliability to ensure the durability and safety of our product.































Model	EIG30102(Induction)	EEG30101(Ceramic)
Certification	ETL, FCC ETL, FCC	
Product Dimensions(WxDxH)(inches)	12 5/8 x 17 7/8 x 2 3/4	12 5/8 x 17 7/8 x 2 3/4
Cutout Dimensions(WxD)(inches)	11 13/16 x 15 3/4	11 13/16 x 15 3/4
Control Type	Circle Touch	Circle Touch
Heating Level	9 level, Keep Warm, Boost	9 level, Keep Warm
No. of Burner	1	1
Panel Material	German SCHOTT Ceramic Glass	German SCHOTT Ceramic Glass
Color	Black	Black
Heating Zone Size(inches)	7.5	8.3
Wattage(W)	100-3000W	120-2400W
Power Supply	120V/60Hz 15A	120V/60Hz 15A
Power Cord	Included	Included
Dual Element Zone	N	Υ
Residual Heat Indication	Υ	Υ
Child Lock	Υ	Υ
Overheat Protection	N	Υ
Residual Heat Indication	Y	1
Timer	Y	Y
Net Weight(lb)	13.2	
Gross Weight(lb)	16.1	13.7
Packing-Box Size (WxDxH)(inch)	21 1/2 x 15 3/8 x 7 15/16	21 1/2 x 15 3/8 x 7 15/16
Warranty	5-year limited warranty	5-year limited warranty



FOTILE Domino Series Cooktops



Mix & Match for different widths and every kitchen size



Professional design with SCHOTT Black Ceramic Glass



Different types of fuel can be used for a wide variety of cuisines

59 / FOTILE / 60





Enjoy the delicacy

Brunch for one, wine for two, afternoon tea for three, or lasagna for four ...

leave everything else to FOTILE.



Simple Ways to Get Rid of Bacteria Stay Safe and Healthy

If food residues are left for 10 hours at room temperature, the number of staphylococcus and E. coli may increase up to 70,000 times the original amount.

A small piece of cloth may host up to 19 types of bacteria and fungus.

FOTILE's unique in-Sink Dishwasher eliminates harmful bacteria through high temperature washes and a pasteurization drying process, creating healthy clean dishes for your family.

FOTILE's innovative In-Sink dishwashers

Delicate Wash (20min)

Standard Wash (45min)

Intensive Wash (80min)

Precise water volume from the Rotary Spraying arms enables 360° water shield technology blanketing all the contents inside with a complete hot wash at 158°F. The result is, ultra-clean dishes with no blind spots!

*Tested by a third party lab

Fruit, Vegetables ... and Seafood

Delicate Strawberries, Fresh Broccoli, and Tasty Crabs.

Your fruit, vegetables and seafood can be washed and cleaned in the FOTILE 3-IN-1 In-Sink Dishwasher.

FOTILE Uses Patented Technologies

Including Ultrasonic Turbulence for the produce cleaning.

The produce and seafood cleaner can remove dirt and over 90%* of harmful pesticides. FOTILE's 3-IN-1 In-Sink Dishwasher is environmentally friendly by eliminating secondary contamination from chemicals in detergent.









Your food must be treated in the healthiest way!

us.fotileglobal.com

63 / FOTILE

More Possibilities

Home Bars, Home Cafes, Tiny Houses, RVs......
Installation can be done at places that were once impossible!












Explore more possibilities with FOTILE.

us.fotileglobal.com



FOTILE In-Sink Dishwashers





MODEL	SD2F-P3		SD2F-P3L
Certification	ETL, DOE		
Dimensions & Weight			
Product Dimensions(WxDxH)(inch)	35 1/4 X 19 5/16 X 22		
Cut-out Dimensions(WxDxH)(inch)		33 11/16 x 18 1/8 x ≥ 25	
Height of the Door When Fully Open		16 3/8	
Technical Specifications			
Power Supply		120V, 60Hz, 13A	
Wattage(W)		1500W	
Recommended Water Pressure Range		20.3-145.04 psi	
Energy Usage(Normal Wash Mode)		178 kWh/year	
Washing Mode and Features			
Washing Mode		Dish Washing	
Washing Mode	Delicate	Normal	Intensive
Highest Washing Temperature(°F)	122	158	158
Washing Time(min)	20	45	80
Water Consumption(gal/cycle)	1.85	2.5	3.17
Number of Wash Cycles	3	5	5
Capacity	3 Sets		
Accomodates Plates Up to	10in		
Variable Dish Rack	Yes		
Fan Assisted Drying	Yes		
Noise Level(dB)	57.17-57.80dB		
Tub Material	Stainless Steel		
Operation Mode	Micro-pressure Waterproof Touchscreen		
Digital Display	Yes		
End of Washing Beeps	Yes		
Leak Protection	Yes		
Child Lock	Yes		
Material of Washing Basket	Nylon Coating		
Number of Spray Arms	1(Bottom)		
	1 dishwasher basket		
Accessories Included	basic plumbing spare parts		
Warranty: 2-Year Labor I 5-Year (Limited) PARTS			






:	SD2F-P5/SD2F-P5L			SD1F-S1	
	ETL, DOE, Energy Star, NSF, UPC				
;	34 3/4 x 19 15/16 x 21 11/16 20 9/16 x 20 7/8 x 21 11/16				
	33 11/16 x 18 15/16 x ≥25	5	1	9 3/8 x 18 7/8 x ≥ 25	
		17	1/2		
		120V, 60	0Hz, 15A		
		150	00W		
		20.3-14	5.04 psi		
		150 kV	Vh/year		
	Dish Washing			Produce Washing	
Delicate	Normal	Intensive	Delicate	Normal	Intensive
140	140	167		Room Temperature	
20	60	80	7	12	15
			Low: 2.91	Low: 3.43	Low: 3.96
1.85	1.95	3.17	Med: 3.96	Med: 4.49	Med: 5.02
			High: 5.02	High: 5.55	High: 6.08
3	4	5	1	2	3
		4 S	Sets		
		1(Din		
		Y	es		
		Y	es		
		53.	5dB		
	Stainless Steel				
Micro-pressure Waterproof Touchscreen					
Yes					
	Nylon Coating				
		1(Bo			
	1 dishwasher basket				
	1 produce basket				
	basic plumbing spare parts				


Warranty: 2-Year Labor I 5-Year (Limited) PARTS

Installation Information:


SD2F-P3/SD2F-P3L

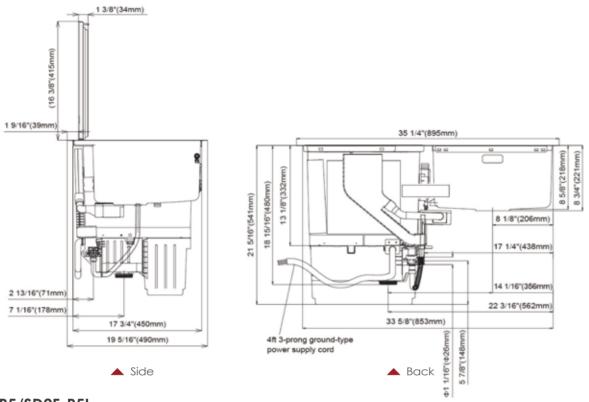

SD2F-P5/SD2F-P5L

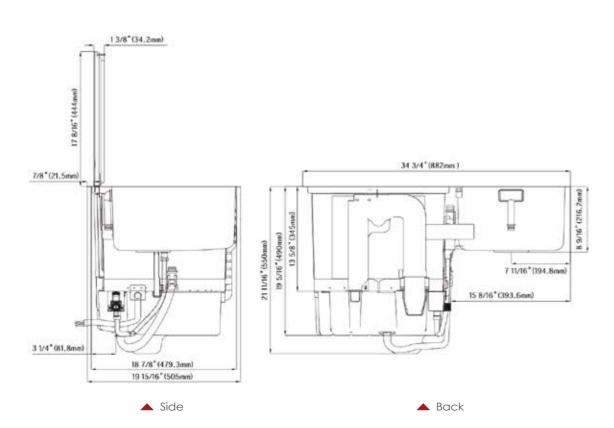

SD1F-S1

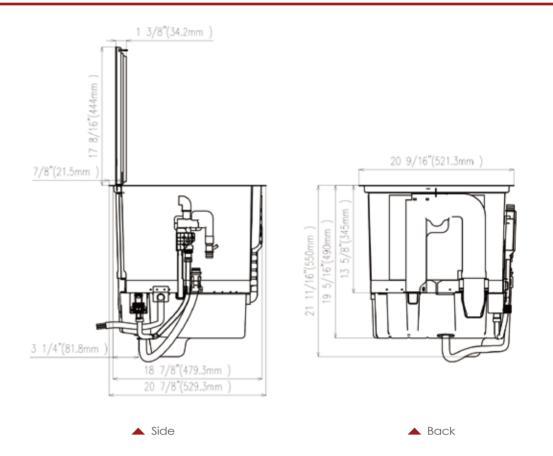

Installation Scenarios:

SD1F - S1





FOTILEMaster Series Convection Oven



10 Preset Cooking Modes for Ease of Use

Baking, Grilling, Proofing, Defrosting & Much More



Uniform Temperature for Accurate Cooking

Five Heating Tubes
3D-Hot-Air Circulation System
Platinum-Alloy Temperature Sensor.



Professional Grade Glass Door

2 Layers of Low-E Glass1 Layer of Tempered Glass

KSG7003A / CONVECTION OVEN

KSS7002A / CONVECTION OVEN





Features	Features
2.47 cu.ft. provides plenty of space for all your baking needs	2.47 cu.ft. provides plenty of space for all your baking needs
Elegant tempered glass and large low-E glass window	Elegant stainless steel and large low-E glass window
Hot air fiter design allows for a more stable and even temperature.	Hot air fiter design allows for a more stable and even temperature.
10 preset cooking modes for easy use and maximum efficiency	10 preset cooking modes for easy use and maximum efficiency
Damping hinge for soft closing door.	Damping hinge for soft closing door.
Rated for high energy efficiency	Rated for high energy efficiency

Specification		Specification	ı
Certification	ETL,FDA	Certification	ETL,FDA
Control Type	Touch Screen	Control Type	Soft Button
Product Dimensions (WxHxD)(inch)	23 7/16 x 23 7/16 x 21 3/4	Product Dimensions (WxHxD)(inch)	23 7/16 x 23 7/16 x 21 3/4
Cut-out Dimensions (WxHxD)(inch)	Flush Built-in 23 9/16 × 23 9/16 × (≥22 13/16) Standard Built-in 22 1/16 × 23 1/4 × (≥21 11/16)	Cut-out Dimensions (WxHxD)(inch)	Flush Built-in 23 9/16 x 23 9/16 x (≥22 13/16) Standard Built-in 22 1/16 x 23 1/4 x (≥21 11/16)
Temperature Range(°F	104-482	Temperature Range(°	PF) 104-482
Capacity (cu.ft.)	2.47	Capacity	2.47
Power Supply	220-240V/60Hz	Power Supply	220-240V/60Hz
Warranty	1-Year Labor & 1-Year (Limited) Parts	Warranty 1	-Year Labor & 1-Year (Limited) Parts

us.fotileglobal.com

71 / FOTILE / 72



FOTILE Steam Ovens



Innovative Dynamic Steam-Balance Technology

The perfect amount of fresh steam at a precise temperature, providing delicious taste.



One Touch Cooking

Multifunctional preset options including Meat, Fish, Vegetable, Pasta, Defrost, Self-clean, and much more for easy and effortless operation.



Easy to Clean

Food Grade 304 Stainless Steel is easy to clean with a damp cloth. Detachable oven racks are dishwasher safe.



SCD42-F1 / STEAM OVEN






Features	Features
Innovative dynamic steam-balance technology	Innovative dynamic steam-balance technology
8 preset modes	6 preset modes
Precise temperature control system	Precise temperature control system
Elegant O-Touch design and simple to clean	Elegant stainless steel series

Specification		Specification	ı
Certification	ETL,FDA	Certification	ETL,FDA
Control Type	Touch Screen	Control Type	Touch Screen
Product Dimensions (WxHxD)(inch)	23 7/16 x 17 15/16 x 20 1/4	Product Dimensions (WxHxD)(inch)	23 7/16 x 17 15/16 x 20 1/4
Cut-out Dimensions (WxHxD)(inch)	Flush Built-in 23 9/16 x 18 1/8 x (≥21 11/16) Standard Built-in 22 1/16 x 17 3/4 x (≥21 11/16)	Cut-out Dimensions (WxHxD)(inch)	Flush Built-in 23 9/16 x 18 1/8 x (≥21 11/16) Standard Built-in 22 1/16 x 17 3/4 x (≥21 11/16)
Wattage (W)	2250	Wattage	2250
Power Supply	240V/60Hz	Power Supply	240V/60Hz
Capacity (cu.ft.)	1.48	Capacity	1.48
Temperature Range	°F) 86-212	Temperature Range	(°F) 86-212
Preset Modes	8	Cooking Modes	6
Material	Tempered Glass	Material St	tainless Steel and Tempered Glass
Warranty 1-Y	ear Labor & 1-Year (Limited) Parts	Warranty 1-	Year Labor & 1-Year (Limited) Parts


FOTILE / **74**

us.fotileglobal.com


Flush in Unit: inch

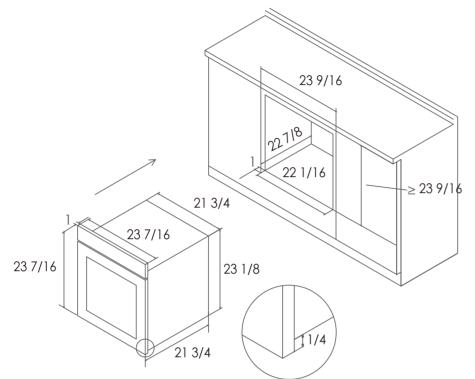


Standard Built-in

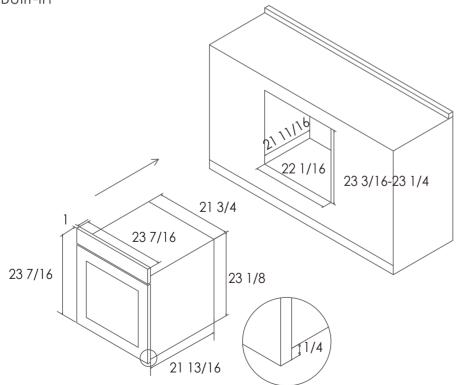

Flush in

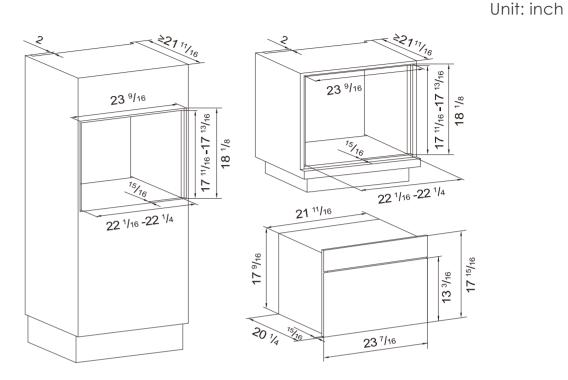

Standard Built-in

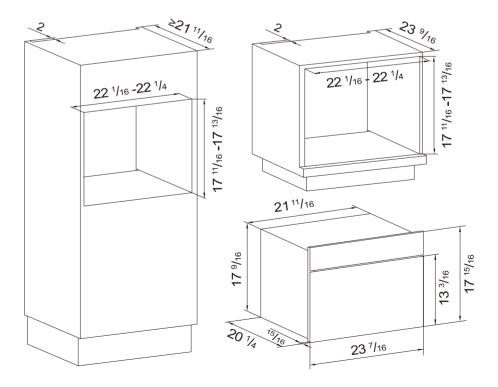

us.fotileglobal.com

ETL, FDA, NRCAN

Touch Screen

23 7/16 x 18 x 21 1/4 Flush Built-in

23 5/8 x 18 1/8 x (≥22 1/2)

Standard Built-in

22 1/16 x 17 3/4 x (≥21 11/16)

3600

240V/60Hz

1.48

Onyx Black | Moonshadow Grey



FOTILE 4-IN-1 Steam-Combi Oven



Multifunctional Built-in Oven

A steam oven, a convection oven, an air fryer, and a dehydrator, all in one product



52 Preset Menus

From omelette and pizza, to chicken and BBQ ribs, enjoy effortless cooking and create anything you can imagine with just one touch



6 Auxiliary Function

Proof, Defrost, Descale, Warm Steam Clean, Dry Up

HZK-TS1/HZK-TS1-Y




Features Enjoy juicy roasted chicken with steam bake mode True convection with top, rear, hidden bottom heating elements 52 quick cooking menus, professional and convenient 3-layered door prevents heat transfer and heat loss Precise temperature control system

Certification Control Type **Product Dimensions Cut-out Dimensions** Wattage (W)

Standard Built-in

Installation Information

Unit: inch



. , , ,	
Temperature Range (°	F) 86-446
Preset Modes	52
Material	Tempered Glass Door and Stainless Steel inner chamber

Warranty 1-Year Labor & 1-Year (Limited) Parts


Product Dimensions

Color

Specification

Power Supply

Capacity (cu.ft.)



us.fotileglobal.com

77 / FOTILE FOTILE / 78

FOTILE chefcubii^{*} 4-IN-1 Steam-Combi Oven









Steam • Convection Bake • Dehydrate • Air Fry



79 / FOTILE

FOTILE

4-IN-1 Steam-Combi Oven



Multifunctional Countertop Oven

A steam oven, a convection oven, an air fryer, and a dehydrator, all in one product



Steam-Bake Mode

FOTILE's unique Steam-Bake mode creates moisture in the oven, while convection baking ensures uniform heating so your food cooks evenly



40 Preset Menus

From omelette and pizza, to chicken and BBQ ribs, enjoy effortless cooking and create anything you can imagine with just one touch



HYZK26-E1 / STEAM-COMBI OVEN (Online Only)

HYZK26-E2 / STEAM-COMBI OVEN (In-Store Only)





Features	Features
Large See-Through Window	Large See-Through Window
3-layered door prevents heat transfer and heat loss	3-layered door prevents heat transfer and heat loss
Control knob operation is easy to use	Touch screen operation
Large portable water tank is easy to refill and clean	Large portable water tank is easy to refill and clean
Steam self-clean mode efficiently sterilizes the nonstick interior with high steam	Steam self-clean mode efficiently sterilizes the nonstick interior with high steam

Specifico	ution	Specification	1
Certification	ETL, FDA, NRCAN	Certification	ETL, FDA, NRCAN
Product Dime (WxDxH) (inch)	nsions 17 13/16 x 18 7/8 x 14	Product Dimensions (WxDxH)(inch)	3 17 13/16 x 18 7/8 x 14
Capacity (cu.	ff.) 1	Capacity	1
Power Supply	(V/Hz) 120/60	Power Supply	120/60
Wattage (W)	1550	Wattage (W)	1550
Temperature I	Range (°F) 86-446	Temperature Range	e (°F) 86-446
Preset Menus	40	Preset Menus	40
Operation	Orange Ring Light Control Knobs	Operation	Touch Screen
Accessories	1* Glove 1* Grill Rack 1* Bake Tray 1* Steam Tray Humidity-Controlled Chip (For Dehydration)	Accessories 1* Humic	1* Glove 1* Grill Rack 1* Bake Tray 1* Steam Tray dity-Controlled Chip (For Dehydration)
Warranty	1-Year Labor & 1-Year (Limited) Parts	Warranty 1-Ye	ear Labor & 1-Year (Limited) Parts