
Slant Vent Series Range Hoods JQG9001 Spec Sheet



whether under cabinet or wall mount, this powerful certified Range Hood offers superior smoke, grease, and odor extraction due to its unique design, close proximity to the cooktop, and a 90 degree angle automatic open Capture Shield. Best of all, this powerful range hood not only offers excellent venting performance, it's exceptionally quiet so you can have a casual conversation as you are preparing a meal. Available in Onyx Black Tempered Glass.

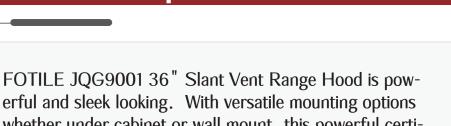

A BREATH OF FRESH ENGINEERING

>

Key Features



90°Automatic Open Capture Shield to Prevent Smoke From Spreading



Slant Vent Design Ensures Close Proximity to Cooking Surface and Smoke



Dual AC Centrifugal Motors for Exhaustive and Strong Ventilation



98% Odor Reduction Rate &95% Oil Separation Rate

- Secondary Features

Extra Wide Smoke Inlet

Covers 7.2 ft ² of Cooking Area (5-6 Burners)

Auto Delay Shutoff

Extracts Lingering Odors After Cooking

Powerful LED Light

Lights Up Your Cooktop

• Large Oil Collection Cup

Detachable and Easy to Clean




Specifications Table

JQG9001
ETL, HVI, CEC
35 7/8
der Cabinet/Wall Mount(Optional Decorative Cover Required)
3
230 / 400 / 520
850*
) 400
120/60
1.2 / 4.0 / 6.0
39.0 / 49.2 / 54.3
3W × 2 (LED)
Dual AC Motors
Touch
2min
Y
95%
98%
Labor: 2 Years Parts: 5 Years(Limited)

TILE Equivalent CFM is a her CFM rating due to our erless technology that nbines WhisPower Motors Capture-Shield design. utilizing this technology, TLE applies the Coanda ect by accelerating smoke raction and grease aration, and increasing Capture Efficiency. This bles FOTILE to cover a Jer cooktop surface (7.2 Ft) and achieve a 95% oil ation rate, and 98% odor uction rate, keeping your hen smoke free and elling fresh.

Installation Dimensions

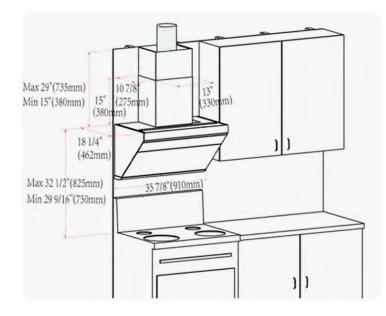

Installation Examples

