

MODEL: IMD-EVV200MX *Wine Coolers*



General Strengths

- ✓ *The models in this range were designed and manufactured for the display and sale of red, white, rosé and brut wine bottles and is the best solution for serving wine at an ideal temperature. This model is DUAL-TEMP configuration.*
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested** All condenser units are 100% tested, in helium chambers to detect refrigeration leaks.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.

Revision: 02 Date: 09/13/2018 EVV200MX_FT_62_2

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Bottles	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H										
IMD-EVV200MX	51-3/4	23-1/2	75-1/2	2	100+100	7 + 7	R134a	0.79+0.79 360+360	39°F/64°F 4°C/18°C	12.36 350	1/4	8.4	630 286
	1314	596	1918						39°F/64°F 4°C/18°C	12.36 350	1/4		

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
service@infrico.com
sales@infrico.com

APPROVALS: _____ **AVAILABLE AT:** _____

MODEL: IMD-EVV200MX

Wine Coolers

STANDARD FEATURES

➤ **Exterior**

- 100% Pine wood exterior (Top, Front, Sides).

➤ **Interior**

- Pre-painted galvanized steel interior,
- LED lighting.

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP Effect.

➤ **Doors**

- Built-in thermopane double glass,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Door locks.

➤ **Shelving**

- (7) seven pre-painted galvanized steel shelves with wooden front per section,

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Split wall for dual temp configuration,
- Refrigeration capacity for each compartment: 1348+1348 Btu/h (14°F) / 395+395 W (-10°C).

➤ **Temperature**

- A single temperature (from 39°F (4°C) to 64°F (18°C)) and appropriate humidity (50% to 70%).
- Recommended temperature, Red Wine between 50°F (10°C) to 64°F (18°C) and White, Rosé and brut between 39°F (4°C) to 46°F (8°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,




OPTIONAL FEATURES

- ✓ Decoration: cherry (standard), black and white (optional).
- ✓ Shelves,
- ✓ Electrical connection is 230 V / 1ph / 50 Hz (plug type varies).

➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

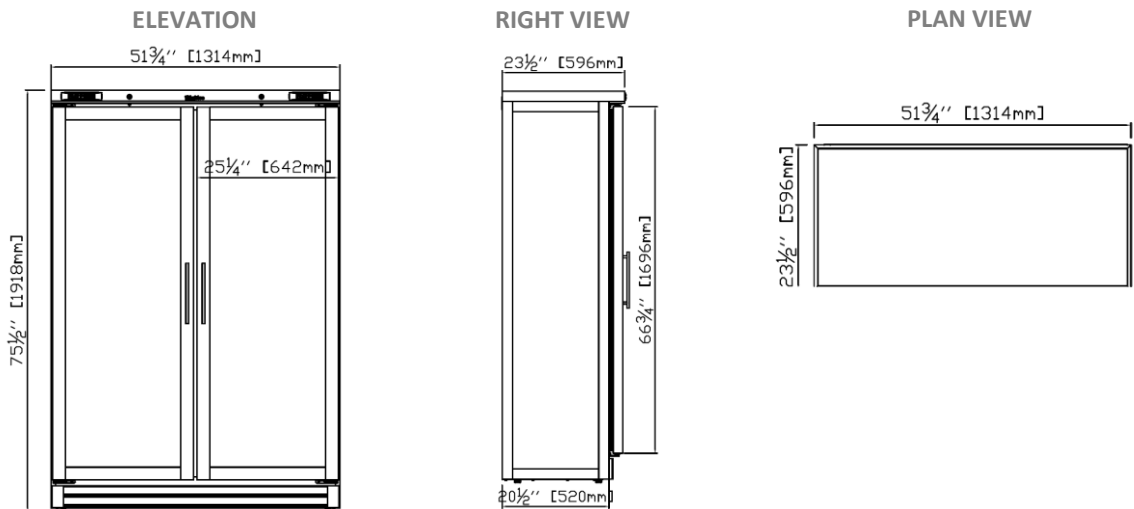

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
service@infrico.com
sales@infrico.com

APPROVALS: _____ **AVAILABLE AT:** _____