


EDGE2460 Oven Cut-sheet General Information:

EDGE2460 ovens can be stacked up to three high. Each oven has a 24" wide conveyor belt and a 60" long baking chamber. Features the G2 touch control system.

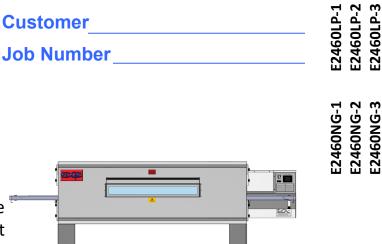


STANDARD FEATURES:

- INTELLIGENT DIAGNOSTICS: The diagnostic features of the G2 Control system brings the serviceability of the EDGE oven to a new level. Information flows from the oven components to this innovative control, allowing for exceptionally fast diagnostics and performance evaluation.
- **RECIPE DRIVEN MENU:** The G2 Control system is more than just a pretty screen that responds to your touch. 30 recipes can be configured to meet the demands of your business. Recipes can be copied from oven to oven and even from store to store.
- CONTROL SYSTEM LOCK: A custom access PIN can be setup to prevent recipe tampering and help ensure that the product your customer expects, is the product they receive.
- LOW OPERATING COST: Operation of the EDGE2460 can be as little as \$0.32 per hour! (Estimate based on an MCF price of \$6.80 and a KWh price of \$0.12. Estimate calculated after a 1 hour pre-heat.)
- **RELIABILITY:** The G2 Control system takes a leap forward in service and reliability. Belt Jam Detection prevents costly damage due to misplaced objects. Critical components are monitored and information is brought forward for viewing, reducing downtime and wasted service visits. The EDGE conveyor system uses a high quality brushless motor, eliminating brush replacement.
- CONSTRUCTION: EDGE2460 ovens are manufactured to exacting tolerances and use stainless steel inside and out. The EDGE oven still has welded corners, a testament to our dedication to quality and traditional craftmanship.
- WARRANTY: EDGE2460 ovens come with a detailed FIVE YEAR Parts and Labor Warranty.



MF&B Restaurant Systems, Inc. Examples C E 119 ICMI Road, Suite 300 • Dunbar, PA 15431 1.888.480.EDGE • www.edgeovens.com

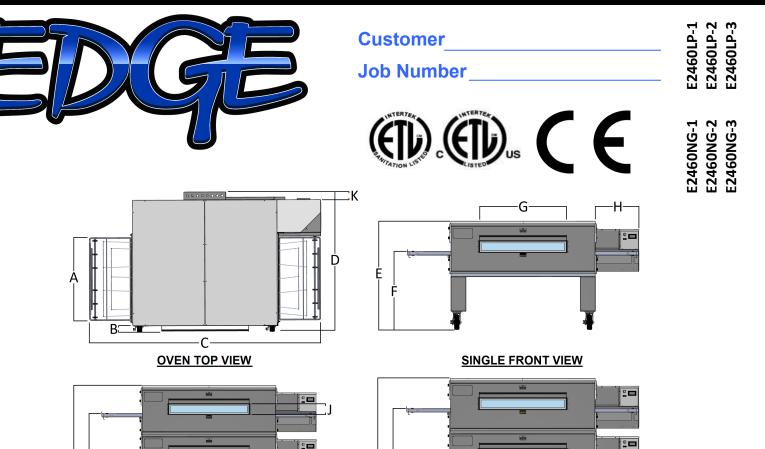

E

| Ë _ | | |
|-------|--|--|
| F | | |

DOUBLE FRONT VIEW

TRIPLE FRONT VIEW

| All measurements in inch | Single | Double | Triple | | Single | Double | Triple |
|--------------------------|--------|--------|--------|--------------------------|-----------|--------|--------|
| A Chamber (W) | 25.50" | 25.50" | 25.50" | G Window (L) | 35.00" | 35.00" | 35.00" |
| B Window (D) | 2.40" | 2.40" | 2.40" | H Cont. Cab. (L) | 17.75" | 17.75" | 17.75" |
| C Conveyor (L) | 93.75" | 93.75" | 93.75" | J Chamber (H) | 3.50" | 3.50" | 3.50" |
| D Oven (D) | 49.10" | 49.10" | 49.10" | K Motor (D) | 3.75" | 3.75" | 3.75" |
| E Floor-Oven (H) | 44.00" | 64.13" | 68.50" | L Leg/Caster (H) | 21.50" | 21.50" | 5.75" |
| F Floor-Conveyor (H) b | 31.50" | 31.50" | 15.50" | | | | |
| m | | 52.00" | 36.00" | | | | |
| t | | | 56.25" | Weight per packaged oven | 1050 lbs. | | |

| Gas Type | Volts | Frequency | Amps | Supply Pressure | BTU/Hr Rating | Manifold Pressure |
|----------|-------|-----------|------|--------------------|---------------|----------------------|
| NATURAL | 120 | 60 Hz | 5.5 | 6" - 8" WC | 150,000 | 4.5" WC |
| PROPANE | 120 | 60 Hz | 5.5 | 10" - 13" WC | 150,000 | 10" WC |

MF&B Restaurant Systems, Inc. • 119 ICMI Road, Suite 300 • Dunbar, PA 15431

1.888.480.EDGE • www.edgeovens.com