




**IND90-G2 ANSI GRADE 2
INDICATOR DEADBOLTS
FOR COMMERCIAL APPLICATIONS**



MEETS
The Buy American Act

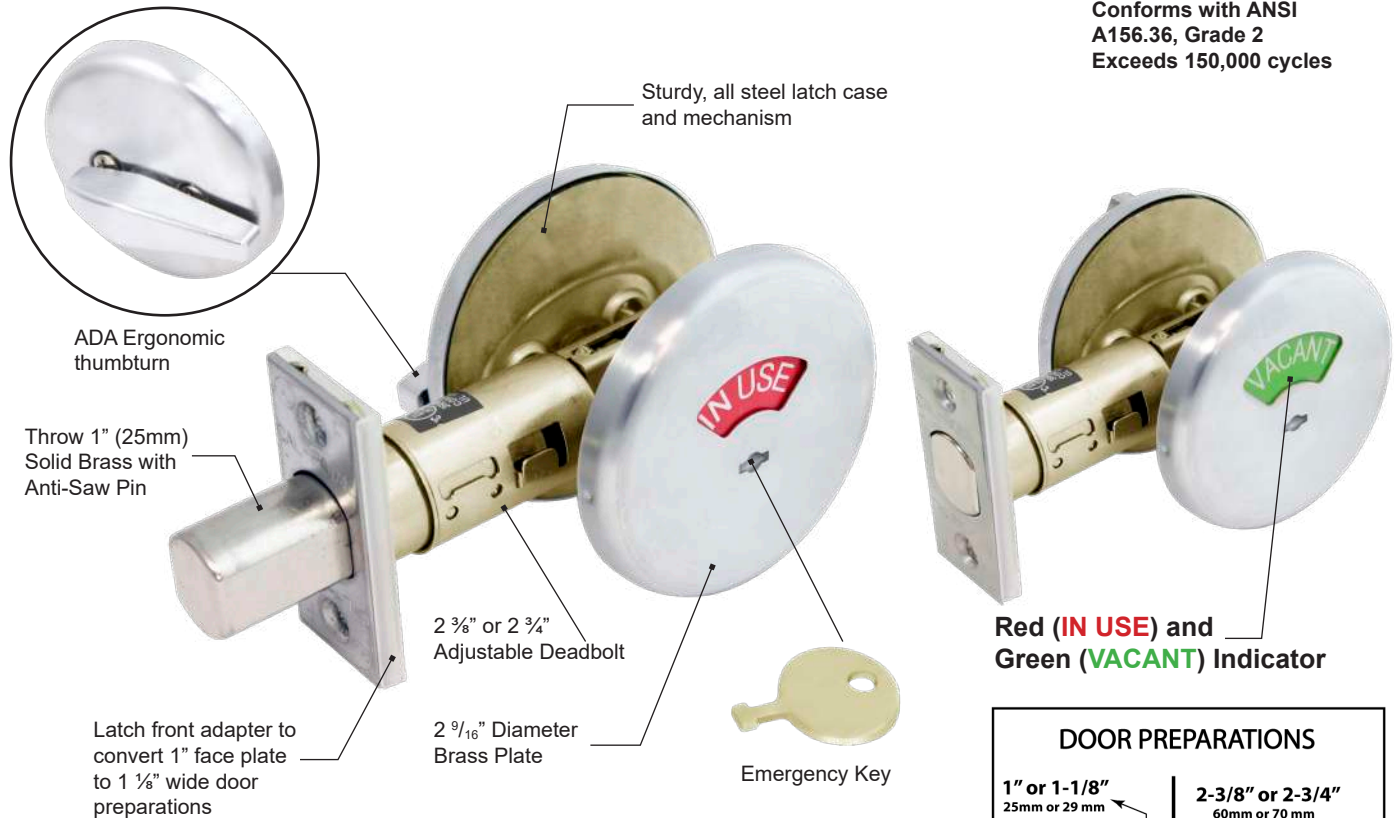

Conforms with ANSI
A156.36, Grade 2
Exceeds 150,000 cycles

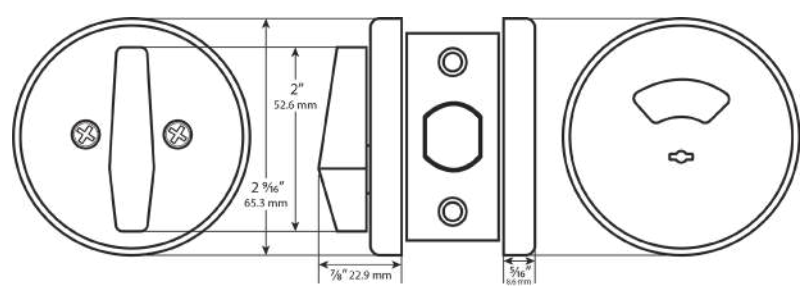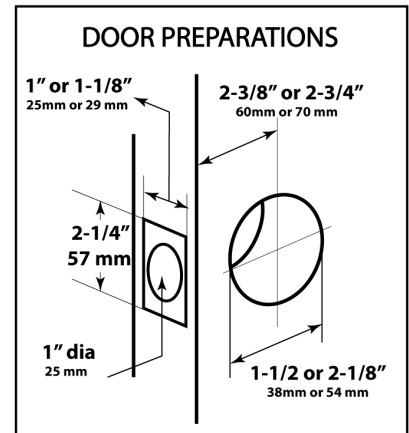

SPECIFICATIONS

<p>TRIM Wrought Brass or Stainless Steel.</p>	<p>BORE DIAMETER 1" for latch, 1 1/2" or 2 1/8" for lock housing.</p>
<p>DOOR RANGES Adjustable 1 3/8" (35mm) to 1 3/4" (45mm) door thickness.</p>	<p>STRIKE 1 1/8" x 2 3/4" square corner.</p>
<p>BACKSET Adjustable UL Listed 3 Hour Fire Rated 2 3/8" or 2 3/4".</p>	<p>FINISHES IND90-G2 is available in stock in US26D, US26, US10B, US4, US3 and US1 finishes.</p>
<p>DEADBOLT FACEPLATE Standard 2 1/4" x 1" packed with 1 1/8" plastic filler to convert 1" face plate to 1 1/8" wide door preparations.</p>	