



SQ300 SERIES

ANSI A156.36 GRADE 2 HEAVY DUTY DEADBOLT

& Available with Interchangeable Core

SQ300 SERIES

CONTEMPORARY SQUARE HEAVY DUTY DEADBOLTS






Anti-pry shield

MEETS The Buy American Act

FOR COMMERCIAL AND RESIDENTIAL APPLICATIONS

ANSI A156.36, GRADE 2

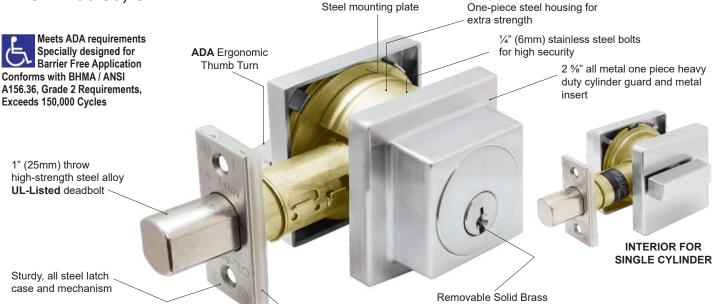


Plastic Filler for use on 1 1/8" door preparation

CYLINDER

Standard "C" 6-pin Cylinder

& Available with Small Format and Large Format Interchangeable Cores

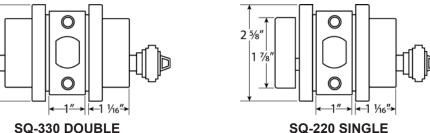

SQ-220 SINGLE CYLINDER

SPECIFICATIONS

TRIM

Wrought Brass or Zinc

DOOR RANGES

Adjustable 1 3/8" (35mm) to 1 3/4" (45mm) door thickness.

BACKSET

Adjustable UL Listed 3 Hour Fire Rating 2 %" or 2 %" latch bolt.

DEADBOLT FACEPLATE

Standard 2 $\frac{1}{4}$ " x 1" packed with $\frac{1}{6}$ " plastic filler to convert 1" face plate to 1 $\frac{1}{6}$ " wide door preparations.

BORE DIAMETER

1" for latch, 2 1/4" for lock housing.

STRIKE

1 ½" x 2 ¾" Square Corner. Extra security 1" throw bolt with ¼" free spinning anti-cut through pin. 2 pcs x 3" screws with wood frame reinforcer greatly strengthens door frames.

KEYWAYS

6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59 / 60, Corbin-Russwin L4, Sargent LA-LB-LC, Falcon / Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

INTERCHANGEABLE CORE

- Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW and
- Schlage Large Format Interchangeable Core.



SQ300 SERIES FINISHES AND FUNCTIONS



FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
	US1	Black
606	US4	Satin Brass
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
626	US26D	Satin Chrome

Refer to price list for stock finishes and functions










SQ-220

- **\$** ICSQ-220
- **& ICSCSQ-220** ANSI E0152




Heavy Duty Single Cylinder Deadbolt

Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown

SQ-330

- **2** ICSQ-330
- **ICSCSQ-330**ANSI E0142




Heavy Duty Double Cylinder Deadbolt

Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.

SQ-600

- **2** ICSQ-600
- \$ ICSCSQ-600 ANSI E0172




Classroom Deadbolt Lock

Deadbolt thrown or retracted by key from outside. Inside turn unit will retract bolt only. Bolt automatically deadlocks when fully thrown.

SQ-700

- **\$** ICSQ-700
- **S** ICSCSQ-700 ANSI E1161



One Way Dead Bolt WITH INTERNAL PLATE

Deadbolt thrown or retracted by key only. Bolt automatically deadlocks when fully thrown. Blank plate inside (exposed screws).

SQ-363



One Sided Dead Bolt

Deadbolt thrown or retracted by turn unit only. No outside trim. Bore halfway through door for installation visible from one side of door only.

SQ-365



One Sided Dead Bolt WITH EXTERNAL PLATE

Deadbolt thrown or retracted by turn unit only. Blank plate is on external trim to be used on bore holes 2 1/8" wide.

OTHER FUNCTIONS NOT LISTED ARE AVAILABLE UPON REQUEST

- 🙎 "IC" Indicates functions available with Interchangeable Core compatible with 6 or 7-Pin cores by Best, Falcon and Arrow.
- **2** "ICSC" Indicates deadbolts that are available with Schlage Large Format Interchangeable Core

