

Ø200 mm LED Traffic Signal Module Model No.: TL200D



Product Features

Novel design with beautiful appearance
Low power consumption
High efficiency and brightness
Large viewing angle
Long lifespan: 80 000 hours

Multi-layer sealed and waterproof
Visual distance: $\geq 400\text{m}$
Housing: Polycarbonate
Exclusive optical diffuser lens and good color uniformity

Long viewing distance
Wide temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
CE, IP55, ITE Standard, RoHS,
TUV, UL, EMC, LVD, WEEE,
Swedish standard SS-EN 12368:2006


Technical Parameters:

Article Number	Color	LED Qty	Light Intensity	Wave Length	Viewing Angle L/R	Viewing Angle U/D	Power	Working Voltage	Housing Material
TL200R	Red	61	$\leq 400\text{cd}$	$625 \pm 5 \text{ nm}$	30°	30°	6W	11-30VDC/VAC 85V-265VAC, 50/60HZ	PC, UV resistant
TL200Y	Yellow			$590 \pm 2 \text{ nm}$			5W		
TL200G	Green		$\leq 600\text{cd}$	$505 \pm 2 \text{ nm}$			7W		
TL200V	White		$\leq 700\text{cd}$	6500K			6W		
TL200B	Blue		$\leq 600\text{cd}$	$470 \pm 5 \text{ nm}$					

Packing Info:

Carton Size	QTY	GW	NW	Wrapper	Volume (m3)
0,21 * 0,22 * 0,10 m	1 pcs /carton box	0,65 kg	0,8 kg	K=K carton	0,004

Installation Sketch:

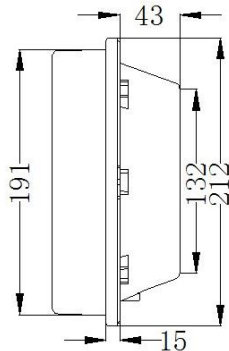

Address
Baiona AB
Hagagatan 34
113 47 Stockholm
Sweden
Phone
+46 (0)73-679 35 50

Company headquarters
Stockholm
Bank
Handelsbanken
IBAN
SE78 6000 0000 0005 9016 1881
BIC
HANDSESS

Bankgiro
5456-5197
Organization no
559243-2479
VAT number
SE559243247901
Holds F-tax certificate

Internet
www.ledochled.se
E-mail
info@ledochled.se
Terms & delivery conditions
www.ledochled.se/villkor