


1. PLACE NAPPY UNDER BABY'S BUM

1-2 cm above bubs' bum crack is just right. Pull the front of the nappy up to bubs' tum to provide a snug fit around the base.



2. SECURE THE WAIST FLAPS

Pull the waist flaps across and snap into place, making sure it's not too tight.




3. TUCK AWAY EXCESS FABRIC

Smooth any excess flaps around bubs' waistline. Tuck up excess front fabric to get a nice smooth finish on the front. Snugly into bubs' knicker line. No gaps will reduce leaks.

NAME: _____

SNAP GUIDE:

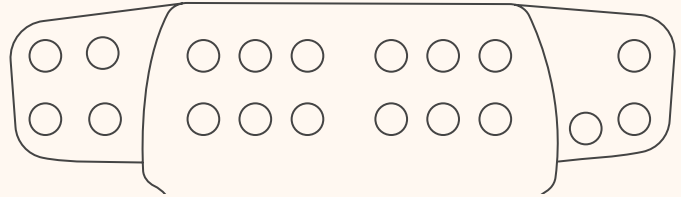

EXTRA INSTRUCTIONS: _____

