
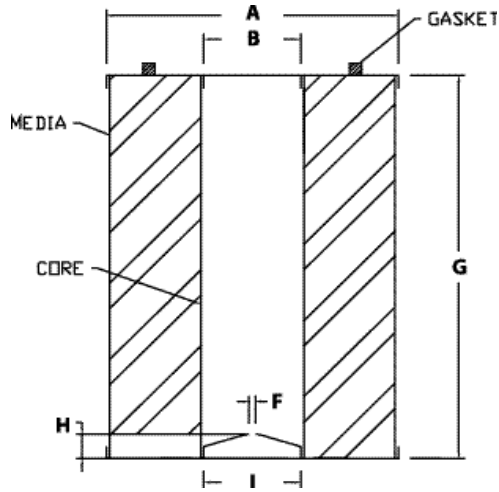


BHA® Cartridge Tek Planner

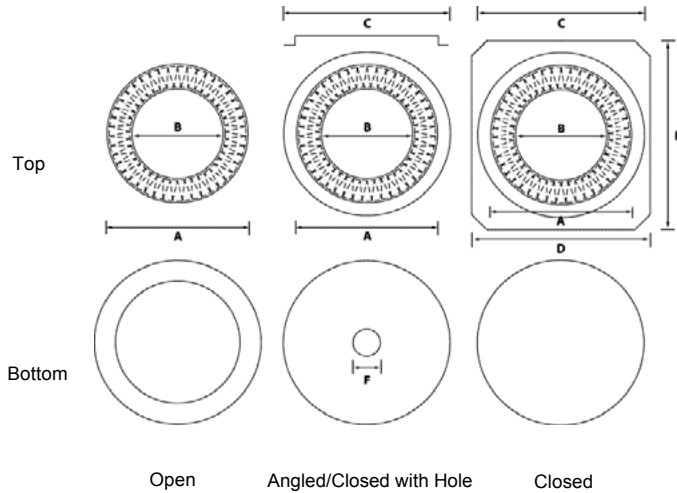

Customer Name:
 Customer Location:
 OEM:
 Model Number:
 Part Number:
 Quantity:

Dimension Block	Pleat Count:	
A = Top Cap O.D.	70	167
B = Top Cap I.D.	100	310
C = Flange Top O.D.	120	360
D = Square Top Width	140	
E = Square Top Length	Sq. Ft.:	
F = Bolt Hole Diameter		
G = Overall Body Length	Pleat Depth:	
H = Recessed Pan Depth		
I = End Cap I.D.	Gasket Material:	
Gasket: (H x W x I.D.)		
Gasket Location: Top of Flange Under Flange	Merv Rating	

Max Temp:

Cont. Temp:

Application

Media:	ProTura SB Nano	Cellulose (Paper)	Aramid	Spun Bond Polyester	Polypropylene	Anti Static	PPS	Wire Backed Felt	Other
Treatments:	ePTFE	Nanofiber	HO (oil/water resistant)	Fire Retardant					
Outer Bands:	Yes	No							
Inner Core:	Perforated GV Steel	Spiral Expanded	Spiral Glue:	Inner	Outer				
Outer Screen:	Yes	No	Galvanized	Stainless Steel					
Ground Wire:	Yes	No	Location:						



Parker Hannifin Corporation
 Industrial Gas Filtration and Generation Division
 11501 Outlook Street, Suite 100 | Overland Park, KS 66211 USA
 phone 800.821.2222 | fax 816.353.1873 | e: filtration@parker.com | www.BHA.com

PB2005-391

ENGINEERING YOUR SUCCESS.