

EcoGun 910S

Manual Air Spray Gun Pressure-Feed

Description

The **EcoGun 910S** is a 2-piston state-of-the-art pressure-feed air spray gun. Designed for professional use, performance and durability are its distinguishing characteristics in order to meet highest demands. Via exchangeable air caps with different atomization performance, this spray gun ensures maximum

flexibility. User-friendly handling is guaranteed by the light weight and ergonomic body. The **EcoGun 910S** is predestined for the automotive and general industry, refinishing, wood and glass painting, but is also equally suitable for almost any other paint coating purposes.



Customer Benefits

- » 2-in-1-Technology: Change from reduced overspray (conventional) to minimum overspray (LVLP) within seconds
- » Quick-clip needle removal and insertion
- » All air caps with 1/4 revolution bayonet lock
- » Pressure measurement located directly in front of the air cap
- » Very high air volume and material regulation
- » Very high spray pattern width regulation (round to flat)
- » Swivel air connection as standard
- » Lightweight design with optimum center of gravity allows ergonomic handling
- » ATEX Ex II 2G T60°C X



EcoGun AS MAN 2PF N36200001V

Specification

Weight	519 g
Material Gun Body	Aluminium anodized
Parts contacted by media	SST, ALU anodized
Connector Fluid	G 3/8"; 3/8" NPSM
Connector Air	G 1/4"; 1/4" NPT
Recom. Air Pressure	2,5 - 3,5 bar (36 - 51 psi)
Air Pressure max.	8,0 bar (116 psi)
Fluid Pressure max.	4,0 bar (60 psi)
Operating temperature max.	60 °C (140 °F)
ATEX Marking	Ex II 2G T60°C X


Accessories

Part No.	Description
W40030397	Hose d6,35 PA/NBR
W40030272	Hose 9x16
M58100061	Hose connection 9x16 G1/4"
M58100051	Hose connection 3/8"i-6,4x12,7 w/o kink
M58100052	Hose connection 3/8"i-6,4x12,7 w.kink
N40040062	Quick change bushing R3/8"a 60G VA
M58940013	Quick connector 3/8"i VA
M58940019	Quick connector 3/8"i return valve VA
N40030046	Quick change connection DN7 G1/4"a Ms
M01010185	Push-in nipple DN7 G1/4"i Ms
N36960038	Cleaning kit EcoGun 22pcs

Nozzle Selection

Air Cap	Nozzle diameters [mm] / Media
CF (A) LF (A)	0,5 / 0,8 / 1,0 / 1,2 Fine finish coating, top coats
CF (B) LF (B)	1,3 / 1,4 / 1,5 / 1,6 General coatings e.g. base coats, primers, fillers
CF (C) LF (C)	1,8 / 2,0 / 2,5 General coatings e.g. base coats, primers, fillers
CF (D) LF (D)	3,0 General coatings, high viscosity materials

Characteristics

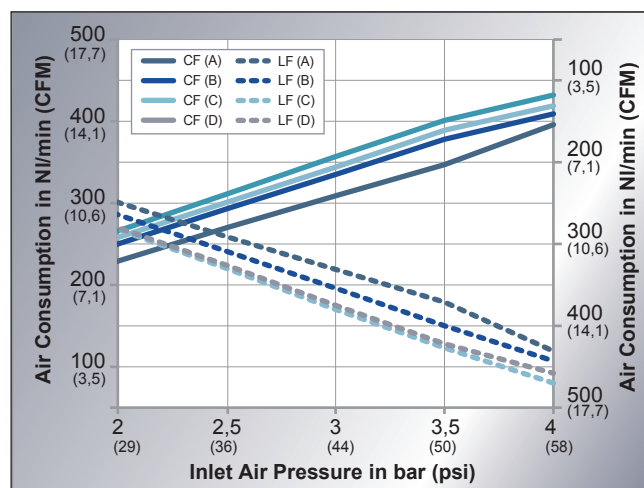

Further Information

All air caps available for conventional and LVLV applications.

Final weight depending on configuration.

If you require further information please do not hesitate to contact our Sales Team at +49 7142 78-0 or Industrial.Products@durr.com