

M20Secondary battery installation steps


Parts required: Power equalizer、 Battery、 Guide groove、 Screw (M5×15mm)

Tools required: Cross screwdriver, 10#Hexagon wrench

Step 1: First, use a cross screwdriver to install the guide slot to the frame beam tube according to the hole position, Remove the fixing screws at the bottom of the seat cushion, Take out the seat cushion upwards, Expose the controller box;



Step 2: Connect the guide slot connecting line to the power equalizer, Battery 1 and battery 2 do not need to distinguish plugs, As shown below;

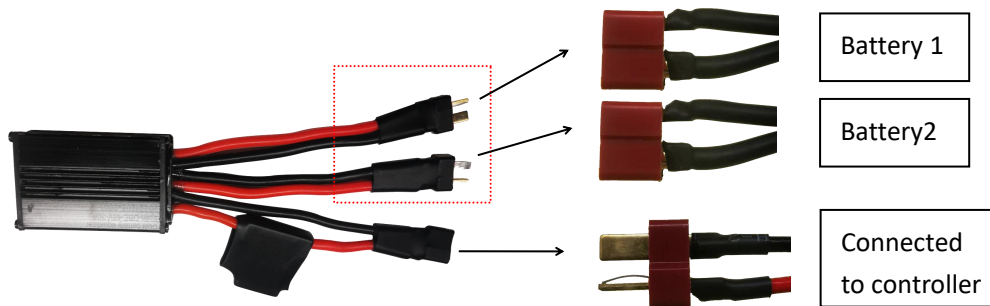

Step 3: Push the battery towards the rear, Lock the battery lock hole anticlockwise with the key, Secure the battery, Press the power switch on the right side of the battery to power on.

