

# TABLE OF CONTENTS

## ROPE

CLIMBING ROPE	2-4
RIGGING ROPE / SLING ROPE	4-5

## ROPE ASSEMBLIES

FLIP LINES	6
LANYARDS	7-9

## HARDWARE

DESCENDERS/ASCENDERS	10
ROPE CLAMPS	11
ROPE GRABS	12
SNAPHOOKS	13
CARABINERS	14-18
CONNECTORS	19
RIGGING TOOLS	20
PULLEYS	21
FIDDLE BLOCKS	22
ROPE CLAMPS / FOOT STRAPS	23
PORT-A-WRAP / TREE FORK	24
FRICTION SAVERS / OTHER	25

## GEAR

EARMUFFS	26
HELMETS	27-30
VISORS	31-34
SADDLES	35
HARNESSES	36
CLIMBERS	37-38

## BAGS

ROPE BAGS	39
THROW BAGS / LINE	40


## EXTRAS

	41-42
--	-------



## 16 Strand Arborist Rope from PELICAN ROPE

This high-strength composite climbing rope features a tough 16 strand braided chemical resistant polyester cover over a non-rotational nylon parallel core. This construction results in a smooth running rope ensuring fewer snags and minimal abrasion. Its 16 strand weave is steam set which helps to eliminate cover over core slippage.

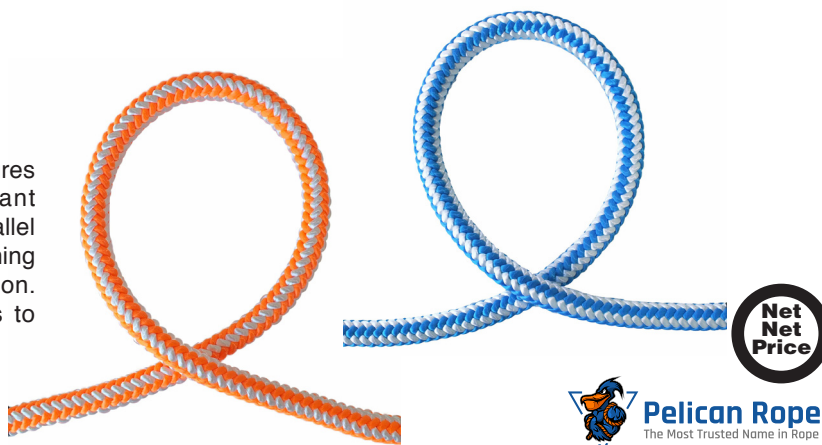

Rotary #	OEM	Tensile Strength	Strand	Rope Dia.	Length	Eye Options	Color
43 - 16763	4A-1605-150H	7,150 lbs	16	1/2"	150' ft		Orange, White
43 - 16764	4A-1605-200H	7,150 lbs	16	1/2"	200' ft		Orange, White
43 - 16881	A4A-1605-150TSE	7,150 lbs	16	1/2"	150' ft	Tight Spliced Eye	Orange, White
43 - 16882	A4A-1605-200TSE	7,150 lbs	16	1/2"	200' ft	Tight Spliced Eye	Orange, White
43 - 16873	4A-1601-150H	7,150 lbs	16	1/2"	150' ft		Blue, White
43 - 16874	4A-1601-200H	7,150 lbs	16	1/2"	200' ft		Blue, White
43 - 16875	A4A-1601-150TSE	7,150 lbs	16	1/2"	150' ft	Tight Spliced Eye	Blue, White
43 - 16876	A4A-1601-200TSE	7,150 lbs	16	1/2"	200' ft	Tight Spliced Eye	Blue, White


## 24 Strand Arborist Rope from PELICAN ROPE

This double-ply braid features a tough chemical resistant polyester cover over a strong nylon core. Pelican's 24 strand braided cover is smooth running over sheaves.



Rotary #	OEM	Tensile Strength	Strand	Rope Dia.	Length	Eye Options	Color
43 - 16759	4A-14Y-120H	7,000 lbs	24	7/16"	120' ft		Yellow, Black
43 - 16760	4A-14Y-150H	7,000 lbs	24	7/16"	150' ft		Yellow, Black
43 - 16761	4A-14Y-200H	7,000 lbs	24	7/16"	200' ft		Yellow, Black
43 - 16871	A4A-14Y-150TSE	7,000 lbs	24	7/16"	150' ft	Tight Spliced Eye	Yellow, Black
43 - 16872	A4A-14Y-200TSE	7,000 lbs	24	7/16"	200' ft	Tight Spliced Eye	Yellow, Black

## Tree Viper 24 Strand Climbing Rope from PELICAN ROPE








The Tree Viper is a unique hand-spliced 24 strand rescue rope. This rope looks great, and provides easy knotability and zero milking. The bright colors of the rope ensure excellent visibility.

The incredibly strong cover of this climbing rope runs smoothly over sheaves, providing reduced drag through gears for faster ascending and finer control while descending. The nylon core holds better and stronger knots, due to its stretch and texture.

The double-ply braid features abrasion and chemical resistant polyester cover over a strong nylon. The polyester cover provides excellent UV Protection, high abrasion resistance, and unmatched durability.



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options	Color
 43 - 16756	A4A-15LY15-120TSE	6,300 lbs	7/16"	120' ft	Tight Spliced Eye	Blue, Green, Orange, Yellow
 43 - 16757	A4A-15LY15-150TSE	6,300 lbs	7/16"	150' ft	Tight Spliced Eye	Blue, Green, Orange, Yellow
 43 - 16758	A4A-15LY15-200TSE	6,300 lbs	7/16"	200' ft	Tight Spliced Eye	Blue, Green, Orange, Yellow
 43 - 16869	4A-15LY15-150H	6,300 lbs	7/16"	150' ft		Blue, Green, Orange, Yellow
 43 - 16870	4A-15LY15-200H	6,300 lbs	7/16"	200' ft		Blue, Green, Orange, Yellow

## Static Master Pro Climbing Rope from PELICAN ROPE

Static Master Pro is a static kernmantle rope with a polyester core and cover. Because of its 100% polyester composition, this rope is very low-stretch yet high-strength. It is also very flexible, smoothly passing over pulleys and sheaves.

Withstands rugged outdoor conditions, Extremely low-stretch, Highly Flexible, High Strength



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options	Color
43 - 16891	1WPP-14L54-150H	6,300 lbs	7/16"	150' ft		Lime, Orange
43 - 16892	1WPP-14L54-200H	6,300 lbs	7/16"	200' ft		Lime, Orange
43 - 16893	A1WPP-14L54-150SNTE	6,000 lbs	7/16"	150' ft	Sewn eye / thimble	Lime, Orange
43 - 16894	A1WPP-14L54-200SNTE	6,000 lbs	7/16"	200' ft	Sewn eye / thimble	Lime, Orange
43 - 16895	1WPP-161L54-150H	9,000 lbs	1/2"	150' ft		Blue, Lime
43 - 16896	1WPP-161L54-200H	9,000 lbs	1/2"	200' ft		Blue, Lime
43 - 16897	A1WPP-161L54-150SNTE	7,800 lbs	1/2"	150' ft	Sewn eye / thimble	Blue, Lime
43 - 16898	A1WPP-161L54-200SNTE	7,800 lbs	1/2"	200' ft	Sewn eye / thimble	Blue, Lime

## Rig Master Rigging Rope from PELICAN ROPE

Pelican's 3 strand composite rope has the durability required for the job, while remaining lightweight and allowing for a comfortable grip. It also offers excellent energy absorption and abrasion resistance.

Very little water absorption, easy handling and splicing, color-coded by strength, lightweight but strong.



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Color
43 - 16885	PD-1604-150H	5,800 lbs	1/2"	150' ft	White, Black
43 - 16886	PD-1604-200H	5,800 lbs	1/2"	200' ft	White, Black
43 - 16887	PD-2001-150H	8,600 lbs	5/8"	150' ft	White, Blue
43 - 16888	PD-2001-200H	8,600 lbs	5/8"	200' ft	White, Blue
43 - 16889	PD-2405-150H	10,500 lbs	3/4"	150' ft	White, Orange
43 - 16890	PD-2405-200H	10,500 lbs	3/4"	200' ft	White, Orange











## Matador Bull Rigging Rope from PELICAN ROPE



By combining a polyester cover over a nylon core, we've created a high force rope that offers dependability and unsurpassed resistance to abrasion, sunlight and common chemicals. The Matador Bull Rope provides shock absorption properties similar to nylon along with a tough polyester cover. Pelican Tuff urethane coating provides an additional UV protections and increased abrasion resistance. Abrasion resistant, Shock Absorbent, Even Balanced, spliceable. Double Braid, Polyester cover, Nylon core.



**Pelican Rope**  
The Most Trusted Name in Rope

Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Color
 43 - 16765	4B-16C3-150H	10,000 lbs	1/2"	150' ft	Green
 43 - 16766	4B-16C3-200H	10,000 lbs	1/2"	200' ft	Green
 43 - 16883	4B-18C1-150H	12,200 lbs	9/16"	150' ft	Blue
 43 - 16884	4B-18C1-200H	12,200 lbs	9/16"	200' ft	Blue
 43 - 16767	4B-20C5-150H	16,000 lbs	5/8"	150' ft	Orange
 43 - 16768	4B-20C5-200H	16,000 lbs	5/8"	200' ft	Orange
 43 - 16769	4B-24CY-150H	25,000 lbs	3/4"	150' ft	Yellow
 43 - 16770	4B-24CY-200H	25,000 lbs	3/4"	200' ft	Yellow





43 - 17028

## Dead Eye Sling with Tenex Rope from BUCKINGHAM

An eye sling that features a 3/4" or 5/8" tenex braid rope and a 17,000 - 22,400 lbs.



43 - 17024

Rotary #	OEM	Length	OD	Weight Capacity
 43 - 17028	39078T-14	14'	5/8"	17,000 lbs.
 43 - 17024	39074T-8	8'	3/4"	22,400 lbs.



 **WARNING:**  
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

## Wire Core Flip Line from U.S. RIGGING

Highly visibility flip line is constructed with a tightly braided 16 strand polyester sheath Pelican Rope over flexible heavy duty 1/4" diameter 7x19 galvanized aircraft cable (GAC).



**Warning: These products are conductive.**  
Do not use wire core near electrical lines



Rotary #	OEM	Standards	Rope Dia.	Length	End Fittings	Color
43 - 16856	FL-A16-08SE	ANSI certified	1/2"	8' ft	Steel Swivel	Orange
43 - 16812	FL-A16-10SE	ANSI certified	1/2"	10' ft	Steel Swivel	Orange
43 - 16813	FL-A16-12SE	ANSI certified	1/2"	12' ft	Steel Swivel	Orange
43 - 16857	FL-A16-15SE	ANSI certified	1/2"	15' ft	Steel Swivel	Orange
43 - 16814	FL-A20-10SE	ANSI certified	5/8"	10' ft	Steel Swivel	Orange
43 - 16815	FL-A20-12SE	ANSI certified	5/8"	12' ft	Steel Swivel	Orange
43 - 16858	FL-A20-15SE	ANSI certified	5/8"	15' ft	Steel Swivel	Orange

## Removable Better Grab Flip Line Kit from U.S. RIGGING

This set includes all components of our standard All-In-One Flip Line Kit but featuring our Removable Better Grab Rope. Stainless Steel core, Removable aluminum cam, Ergonomic rubberized cover. 16 Strand, Polyester cover, wire core.



**Warning: These products are conductive.**  
Do not use wire core near electrical lines



Rotary #	OEM	Standards	Rope Dia.	Length	End Fittings	Color
43 - 16862	FLK33-A16-10SE	ANSI certified	1/2"	10' ft	Steel Swivel	Orange
43 - 16863	FLK33-A16-12SE	ANSI certified	1/2"	12' ft	Steel Swivel	Orange
43 - 16864	FLK33-A16-15SE	ANSI certified	1/2"	15' ft	Steel Swivel	Orange
43 - 16865	FLK33-A20-10SE	ANSI certified	5/8"	10' ft	Steel Swivel	Orange
43 - 16868	FLK33-A20-12SE	ANSI certified	5/8"	12' ft	Steel Swivel	Orange
43 - 16867	FLK33-A20-15SE	ANSI certified	5/8"	15' ft	Steel Swivel	Orange



## Prusik Lanyard from PELICAN ROPE

The Prusik is ideal for tree work, rappelling, and rescue loops. This prusik loop allows you to modify the hitch with any number of different knots applied. It is engineered specifically to provide the perfect grip and offers incredible abrasion resistance. The synthetic Technora fiber offers exceptional stability and a remarkably high melting point. Featuring hand-sewn eyes, these prusiks are designed to survive longer in some of the most extreme conditions. Construction: Kernmante, Cover: Poly-Technora, Core: Technora or Nylon.



Rotary #	OEM	Tensile Strength	Rope Dia.	Length	Eye Options
43 - 16771	LYSE-10T4-28	5,400 lbs	8 mm	28"	Hand Sewn
43 - 16772	LYSE-10T4-30	5,400 lbs	8 mm	30"	Hand Sewn
43 - 16773	LYSE-10T4-32	5,400 lbs	8 mm	32"	Hand Sewn
43 - 16774	LYSE-13T4-28	5,400 lbs	10 mm	28"	Hand Sewn
43 - 16775	LYSE-13T4-30	5,400 lbs	10 mm	30"	Hand Sewn
43 - 16776	LYSE-13T4-32	5,400 lbs	10 mm	32"	Hand Sewn
43 - 16777	LYSE-13T4-34	5,400 lbs	10 mm	34"	Hand Sewn

## SuperSaver Prusik from BUCKINGHAM

Flintlocker Double hole SuperSaver friction ring with prusik attached. SuperSaver Prusik 14" long. Rope is 5/16" Warpspeed Red Rope.



Rotary #	OEM	Length	Rope Dia.	Color
<b>SuperSaver Prusik</b>				
43 - 17056	P9S8V-+P-16	14"	5/16" (7.93mm)	Red

## Trimmer Adjustable Lanyard from KONG

The Trimmer adjustable lanyard is for use in work positioning systems, in conjunction with a fall arrest device. It enables quick and accurate length adjustment, allowing optimal work station positioning. Main features:

- Fitted with a device for progressive length adjustment for the optimal work position.
- It can be used on the harness lateral attachment points to distribute the load of an upright user: the length is adjusted by pressing the ergonomic lever.
- You can use the single ventral attachment point of the harness to distribute the load between the belt and the leg loops of the suspended user.
- Fitted with a sliding protective sheath to protect the rope from contact points that could damage it.
- Available in different lengths.



**TRIMMER**  
43 - 16906 / 16907



**TRIMMER SET**  
43 - 16904 / 16905




Rotary #	OEM	Standards	Color	Length m	g	Rope Dia. ø mm	
<b>TRIMMER</b>							
43 - 16906	289U00200KK	EN 358	Black, Orange	2	375	11	-
43 - 16907	289U00300KK	EN 358	Black, Orange	3	455	11	-
<b>TRIMMER SET</b>							
43 - 16904	289SETU01KK	EN 358	Black, Orange	2	510	11	Tango
43 - 16905	289SETU02KK	EN 358	Black, Orange	3	590	11	Tango





## Adjustable Lanyard from BUCKINGHAM

Stitched Adjustable lanyard


Rotary #	OEM
 43 - 17059	9VV227



## Treesqueeze Positioning Lanyard from BUCKINGHAM

Treesqueeze positioning lanyard now features a newly designed nylon cover to create rigidity and prevent twisting of the Uniline. This allows for easier adjustment and mobility. Treesqueeze 2.0 integrates a choking lanyard system that keeps you from falling down the tree in the event of a Gaff out. Easily create tie-in point where natural tie-in doesn't exist. Doubles as a retrievable friction saver.



Rotary #	OEM	Standards	Length
 43 - 17030	L+08T110A6+J1	ANSI Z133	10'



## Descenders from U.S. RIGGING



43 - 16800



43 - 16802



43 - 16803



Rotary #	OEM	MBS	Min Rope Dia.	Max Rope Dia.	oz.	Color
<b>Aluminum Swing Pulley / Single Sheave</b>						
43 - 16800	USR-835-AU	35kN	9 mm	12 mm	4.3	Alum Alloy
<b>Big 8 Alum Descender with Ears</b>						
43 - 16802	USR-840-AU	40kN	9 mm	16 mm	9.1	Orange
<b>Big 8 Stainless Steel Descender with Ears</b>						
43 - 16803	USR-850-S	50kN	11 mm	16 mm	26	Steel

## Figure 8 Classic Tactical Descender from KONG

Classic figure of "8" descender. Perfect for belaying the first climber with a half, single and double ropes. A true workhorse for Kong, which continues to be popular all over the world. It works on ropes from 9 to 12mm. The black color is particularly appreciated for all uses where the equipment must not be very visible.



Rotary #	OEM	Standards	Material	Main Dim.	Min Rope Dia	Max Rope Dia.	oz.	Color
43 - 16801	80503N400KK	NIT 271-1 NIT271-2 EN 15151-2	alu alloy	140 mm	9 mm	12 mm	110	Black

## Single Lift Ascender from KONG

Single lift ascender. Excellent ability to block out particularly on muddy and icy ropes. Has great wear resistance. Opening lever is ergonomic, easy to handle and protected from shocks and from the risk of accidental opening. Fitted with anti-overturning system of the cam. Aluminum Anodized, for rope diameters 8mm to 13mm.



Left



Right



Rotary #	OEM	Standards	Material	Main Dim.	Min Rope Dia	Max Rope Dia.	oz.	Color
<b>Single Lift Ascender - Right</b>								
43 - 16805	896R04D00KK	EN 567 EN 12841B	alu alloy	193 mm	8 mm	13 mm	225	Red
<b>Single Lift Ascender - Left</b>								
43 - 16806	896B04S00KK	EN 567 EN 12841B	alu alloy	193 mm	8 mm	18 mm	225	Blue



## Trender Rope Clamp from KONG

Double ascender conceived specifically for arboriculture. Fitted with a safety system that prevents accidental rope escape and intrusion of branches into the toothed cam. It works on twin ropes from 8 to 13mm.



Rotary #	OEM	Standards	Material	Color	g	Rope min./mm	Rope max./mm
43 - 16924	874030400KK	EN 12841/B	alu alloy stainless steel	orange, black	550	8	13

## Multi Use Rope Clamp from KONG

This innovative emergency rope clamp. Conceived for single ropes with a diameter between 8 and 13mm, is the first and only clamp that also works on flat and tubular slings from 10 to 15 mm width (even if these are not certified for progression). Due to its small dimensions, it can be easily attached with one hand. The big hole allows locking connectors to rotate.



Rotary #	OEM	Standards	Material	Color	g	Rope min./mm	Rope max./mm
43 - 16993	88800NG00KK	EN 567 and UIAA	alu alloy	green, black	-	8	13

## Better Grab Removable Rope Grab from U.S. RIGGING

Large thumb rest for precise control. Removable Aluminum alloy cam. Ergonomic, rubberized cover. Stainless steel core.



Rotary #	OEM	Rope Dia.	Rope Dia.	oz.	Color
<b>Better Grab Removable Rope Grab</b>					
43 - 16809	USR-MRG-333	7/16"	5/8"	8.7	Alum Alloy

## Aluminum Mini Rope Grab from U.S. RIGGING

Removable Cam, Fixed bolt and nut. Aluminum Alloy, Hard Anodized.



Rotary #	OEM	Rope Dia.	Rope Dia.	oz.	Color
<b>Aluminum Mini Rope Grab</b>					
43 - 16808	USR-MRG-200	11 mm	16 mm	11	Alum Alloy



43 - 16796



43 - 16797






43 - 16843



## Steel Snaphooks from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	↻ kN & mm	▬ oz.	Color
<b>Steel Fixed-Eye Snaphook Dbl Action Gate</b>						
 43 - 16796	USR-01-CFO9B	ANSI Z359.12-2009	23	16 20mm	10.3	Zinc Plated
<b>Steel Swivel Snaphook Dbl Action Gate</b>						
 43 - 16797	USR-02-CS09B	ANSI Z359.12-2009	23	16 21mm	16.9	Zinc Plated
<b>Steel Snaphook with Fixed Eye Dbl Action</b>						
 43 - 16843	USR-01-CF09	ANSI Z359.12-2009	23	16 22mm	12.6	Zinc Plated



43 - 16919



43 - 16918



43 - 16920






## TANGO Fixed-Eye Snaphook from KONG

Hot forged aluminum carabiner with double gate.  
Ideal for positioning lanyards

\* Testing done on this device satisfy the performances requirements posed by NFPA1983:2017.



Rotary #	OEM	Material	Standards	◀ kN	⬆ kN	↻ kN	▬ g	Color
<b>TANGO</b>								
 43 - 16919	71500NNX2KK	alu alloy	EN 362/T NFPA-T• - EN 12275/K	33	10	15	135	Black
 43 - 16918	71500BPX2KK	alu alloy	EN 362/T NFPA-T• - EN 12275/K	33	10	15	135	Blue
 43 - 16920	71500RPX2KK	alu alloy	EN 362/T NFPA-T• - EN 12275/K	33	10	15	135	Red



**WARNING:**  
Cancer and Reproductive Harm - www.P65Warnings.ca.gov



43 - 16778



43 - 16781



43 - 16779



43 - 16780



43 - 16837



43 - 16838

## Steel Carabiners from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	◆ kN	⊗ kN & mm	⚖ oz.	Color
<b>Equal D / Steel twist lock</b>							
⚠ 43 - 16778	USR-12-CTLD	ANSI Z359.12-2009	45	15	16/13 14mm	7.6	Zinc Plated
<b>Captive Eye / Steel triple lock</b>							
⚠ 43 - 16781	USR-14-C3T	ANSI Z359.12-2009	45	-	16 20mm	11.0	Zinc Plated
<b>MOD. D / Steel twist lock</b>							
⚠ 43 - 16779	USR-12-CTLM	ANSI Z359.12-2009	50	16	16/12 20mm	9.0	Zinc Plated
<b>Klettersteig / Steel twist lock</b>							
⚠ 43 - 16780	USR-12-CTL	ANSI Z359.12-2009	45	16	16/12 27mm	9.9	Zinc Plated
<b>Large D / Steel screw lock</b>							
⚠ 43 - 16837	USR-98-C09S	NFPA 1983-G	60	16	16 31mm	9.7	Zinc Plated
<b>Large D / Steel triple lock</b>							
⚠ 43 - 16838	USR-98-C09T	ANSI Z359.12-2009	60	16	16 31mm	11.3	Zinc Plated





## Aluminum Carabiners from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	◆ kN	⌚ kN & mm	⚖ oz.	Color
<b>I-Beamer Lite / Aluminum Alloy triple lock</b>							
⚠ 43 - 16786	USR-19-A3T	NFPA 1983	27	9	8 23mm	3.4	Silver
<b>I-Beamer Lite / Aluminum Alloy twist lock</b>							
⚠ 43 - 16787	USR-19-ATL	NFPA 1983	27	9	8 23mm	3.6	Silver
<b>I-Beamer Pin Kit</b>							
⚠ 43 - 16840	USR-19-PIN KIT Used with our 43-16783, 43-16786,43-16787						
<b>I-Beamer / Aluminum Alloy triple lock</b>							
⚠ 43 - 16783	USR-19-A3T9	ANSI Z359.12-2009 NFPA 1983	27	16	16/8 18mm	4.1	Silver
<b>Alum. Swivel / Aluminum Alloy triple lock</b>							
⚠ 43 - 16790	USR-221-A3TU		25	-	20mm	6.0	Alum/Green
<b>I-Beamer / Aluminum Alloy twist lock</b>							
⚠ 43 - 16839	USR-19-AT9	ANSI Z359.12-2009 NFPA 1983	27	16	16/8 18mm	4.1	Silver
<b>True Oval / Aluminum Alloy triple lock</b>							
⚠ 43 - 16792	USR-127-A3TU		22	7	19mm	2.9	Copper
<b>True Oval / Aluminum Alloy straight gate</b>							
⚠ 43 - 16793	USR-127-AU		22	7	7 22mm	2.4	Copper
<b>Copper Head / Aluminum Alloy triple lock</b>							
⚠ 43 - 16789	USR-128-A3TU		24	8	23mm	3.4	Copper



### WARNING:

Cancer and Reproductive Harm - www.P65Warnings.ca.gov



43 - 16791



43 - 16788



43 - 16835



43 - 16836



43 - 16794



43 - 16841



43 - 16842

## Aluminum Carabiners from U.S. RIGGING



Rotary #	OEM	Standards	◀ kN	▲ kN	↻ kN & mm	⚖ oz.	Color
<b>Fixed-Eye / Aluminum Alloy triple lock</b>							
⚠ 43 - 16791	USR-140-A3TU	-	28	-	22mm	3.9	Silver
<b>BIG D / Aluminum Alloy triple lock</b>							
⚠ 43 - 16788	USR-107-A3TU	-	28	8	22mm	3.0	Silver
<b>I-Beamer / Aluminum Alloy triple lock</b>							
⚠ 43 - 16835	USR-12M-A3TU	ANSI Z359.12-2009	24	-	16 12mm	5.2	Green
<b>MOD. D / Aluminum Alloy twist lock</b>							
⚠ 43 - 16836	USR-117-ATL	NFPA 1983-T	28	8	22mm	3.0	Silver
<b>MICRO 900 / Aluminum Alloy straight gate</b>							
⚠ 43 - 16794	USR-109BL	-	4	-	12mm	0.4	Blue
<b>MICRO 900 / Aluminum Alloy straight gate</b>							
⚠ 43 - 16841	USR-109P	-	4	-	12mm	0.4	Pink
<b>MICRO 900 / Aluminum Alloy straight gate</b>							
⚠ 43 - 16842	USR-109LG	-	4	-	12mm	0.4	Lime Green





## Ovalone Carabiner from KONG

Oval connector wide opening. Ideal for heavy duty applications and for connection to structural anchors, lifelines, etc.

Available in carbon steel & Aluminum Alloy with auto block and twist lock sleeves standard version and high load ANSI certified.





43 - 16911



43 - 16912



Rotary #	OEM	Standards	◀ kN	⬆ kN	⊙ kN	⬆ g	Color
<b>Carbon steel ANSI auto block</b>							
 43 - 16911	41211OZOZKK 412LP0211KK	NFPC-G* EN 362/M ANSI Z359.12	40	-	-	230	Black
<b>Carbon steel ANSI twist lock</b>							
 43 - 16912	41211OZTZKK 142LI0211KK	NFPC-G* EN 362/M ANSI Z359.12	40	-	-	230	Black





43 - 16916



43 - 16917





Rotary #	OEM	Standards	◀ kN	⬆ kN	⊙ kN	⬆ g	Color
<b>Alu alloy auto block</b>							
 43 - 16916	712OPN7VNKK	EN 362/B EN 12275/B	26	9	-	77	Orange, Black
<b>Alu alloy twist lock</b>							
 43 - 16917	712RPP3P1KK	EN 362/B EN 12275/B	26	9	-	77	Red, Black

## OVALONE DNA Steel Carabiner from KONG

Special "helical-shape" connector with a twisted body and circular bar, a must-have when an "offset load is required. It permits 90 degree rotation of any connected device (descenders, rope clamps, fall arresters, etc.) optimizing the operating alignment.



Rotary #	OEM	Standards	◀ kN	⬆ kN	⊙ kN	⬆ g	Color
<b>Carbon steel ANSI auto block</b>							
 43 - 16913	414110ZOZKK	EN 362/M ANSI/ASSE Z359.12	40	16	12	230	Black
<b>Carbon steel ANSI twist lock</b>							
 43 - 16914	414110ZTZKK	EN 362/M ANSI/ASSE Z359.12	40	15	-	230	Black

## D Shaped Steel Carabiner from KONG

Carabiner with a wide opening and high tensile strength. The D shape prevents carabiner rotation and allows the load to be distributed along the major axis. Available in carbon steel with different sleeves (screw, autoblock and twist-locks also conform to ANSI norm).



43 - 16908

43 - 16909

43 - 16910



Rotary #	OEM	Standards	◀ kN	◆ kN	⌚ kN	⚖ g	Color
<b>Carbon Steel screw sleeve</b>							
⚠ 43 - 16908	411120ZL1KK 411MD021PKK	NFPC-G* EN 362/B	50	-	-	240	Black, Bronze
<b>Carbon Steel ANSI auto block</b>							
⚠ 43 - 16909	411120ZOZKK 411MP0211KK	NFPA-G* - EN 262/M ANSI Z359.12	50	20	-	265	Black
<b>Carbon Steel ANSI twist lock</b>							
⚠ 43 - 16910	411120ZTZKK 411MI0211KK	NFPA-G* - EN 262/M ANSI Z359.12	50	20	-	265	Black

## Mini D Carabiner from KONG

The smallest aluminum carabiner with a screw sleeve. To be used for accessories and tools. Available in a straight gate version  
**Warning! Not for human support.**



Rotary #	OEM	◀ kN	◆ kN	⌚ kN	⚖ g	Color
<b>Alu alloy straight gate</b>						
⚠ 43 - 16921	751GN0400KK	6	-	-	30	Green, Black

## FROG CABLE Connector from KONG


The Kong Frog is a revolutionary directional connector that closes automatically when it touches the anchor point. Updated version with improved opening up to 12,7mm. Also suitable for metal cables.




Rotary #	OEM	Material	Standards	◀ kN	◆ kN	⌚ kN	⚖ g	Color
<b>Frog Cable</b>								
⚠ 43 - 16915	7002NH400KK	alu alloy	EN 362/A/T EN 12275/A	25	-	-	50	Black




## Trapezium Quick Link

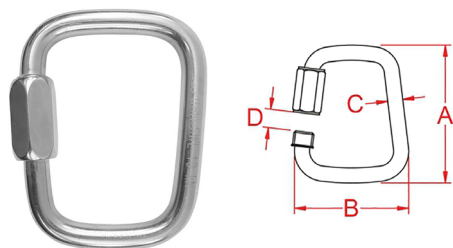


## Quick Link Asymmetric

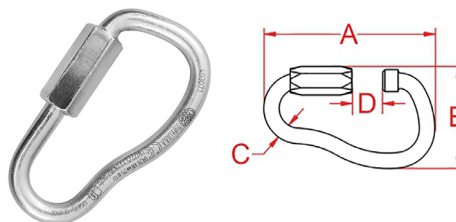



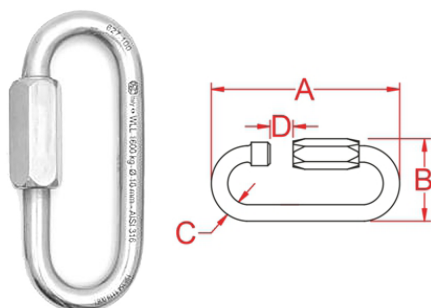



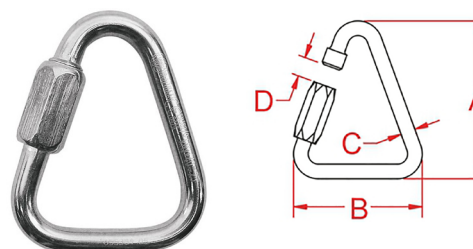







## Quick Link Oval Long





## Quick Link Triangle



## Quick Link Connectors from KONG

Rotary #	OEM	Standards	Material	Color	M.B.S.  kN	M.B.S.  kN	M.B.S.  kg	W.L.L.  kg	 g	A mm	B mm	C mm	D mm
<b>Trapezium Quick Link</b>													
 43 - 16991	538FCOP0PKK	-	Stainless steel 316	Polish	-	-	4900	980	129	82	68	9	11
<b>Quick Link Asymmetric</b>													
 43 - 16992	403DB0101KK	EN 362/Q EN 12275/B	Carbon steel	Polish	25	10	-	-	89	77.5	43.5	7	14
<b>Quick Link Oval Long</b>													
 43 - 16984	527EC0P0KK	-	Stainless steel 316	Polish	-	-	4900	980	85	89	37.5	8	17.5
 43 - 16985	527FC0P0KK	-	Stainless steel 316	Polish	-	-	6250	1250	115	95	41	9	19
 43 - 16986	527IC0P0KK	-	Stainless steel 316	Polish	-	-	8000	1600	160	105.5	45.5	10	20.5
 43 - 16987	527MC0P0KK	-	Stainless steel 316	Polish	-	-	1100	2200	260	124	52.5	12	23.5
<b>Quick Link Triangle</b>													
 43 - 16988	502EC0P0PKK	EN 12275/Q EN 362Q UIAA	Stainless steel 316	Polish	40	10	-	-	89	72	56	8	10
 43 - 16989	502IC0P0PKK	EN 12275/Q EN 362Q UIAA	Stainless steel 316	Polish	60	30	-	-	155	86	66	10	12
 43 - 16990	502OC0P0PKK	-	Stainless steel 316	Polish	-	-	12250	2450	420	123	85	14	17

 Major axis  Minor axis **M.B.S.** Minimum breaking strength **W.L.L.** Working load limit



**WARNING:**  
Cancer and Reproductive Harm - www.P65Warnings.ca.gov

## Stainless Steel Rigging Ring from U.S. RIGGING



43 - 16851



43 - 16852



43 - 16853

Rotary #	OEM	kN	Outside Dia.	Inside Dia.	oz.	Color
<b>Stainless Steel Rigging Ring</b>						
⚠ 43 - 16851	USR-28-S	24	52mm	28mm	3.7	Stainless Steel
<b>Stainless Steel Rigging Ring</b>						
⚠ 43 - 16852	USR-46-S	24	70mm	46mm	5.4	Stainless Steel
<b>Forged Steel Rigging Ring</b>						
⚠ 43 - 16853	DBF-2004-1	150	102mm	76mm	10.0	Zinc Plated

## Arborist Aluminum Ring from BUCKINGHAM

These small multi-functional rings are designed to be used with a wide variety of arborist equipment such as friction savers, connection points, arborist saddles with rope or webbing suspension bridges etc. Manufactured from a high-quality aluminum alloy and then anodized to create a smooth finish to provide an effortless rope pull.



43 - 17050





43 - 17051

Rotary #	OEM	Breaking Strength	ID	OD	Thickness	Color
<b>Aluminum Small Ring</b>						
⚠ 43 - 17050	100A	23 kN	1.125"	2.25"	.50"	Alum Alloy
<b>Aluminum Large Ring</b>						
⚠ 43 - 17051	200A	23 kN	1.875"	3"	.50"	Alum Alloy

## Rigging Plates from KONG

Rigging plates, designed for a tidy workplace and to create an easy system of multiple anchor points. The upper hole can accommodate two carabiners at the same time. Made of light aluminum alloy, very light, compact and durable. New 10mm thick version with beveled holes that allow textile items (rope, lanyards, straps) to be directly inserted without the need for connectors.

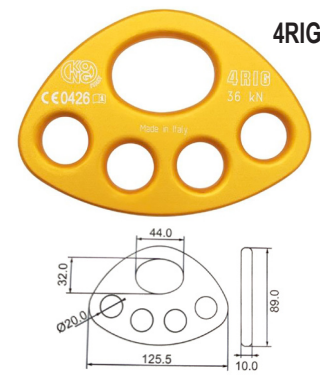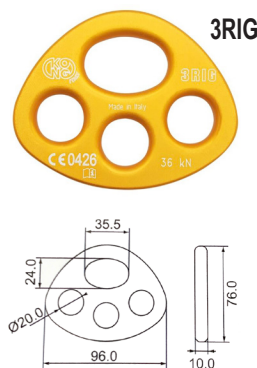

Rotary #	OEM	Standards	Material	kN	g	Color	A mm	Hole Dia. mm
<b>3RIG</b>								
⚠ 43 - 16982	864016400KK	CNB/P/11.114 CEN TS 16415	alu alloy	36	95	Orange	96	20
<b>4RIG</b>								
⚠ 43 - 16983	864017400KK	CNB/P/11.114 CEN TS 16415	alu alloy	36	150	Orange	125.5	20





43 - 16849



43 - 16847







43 - 16846



43 - 16848

## Aluminum Pulleys from U.S. RIGGING



Rotary #	OEM	MBS	Rope Dia.	Rope Dia.	oz.	Color
<b>Aluminum Swing Pulley / Single Sheave</b>						
 43 - 16849	USR-PMS-AU	20kN	0 mm	11 mm	4.3	Orange
<b>Extra Roll Aluminum Pulley/Single Sheave</b>						
 43 - 16847	USR-PSW-AU	30kN	0 mm	16 mm	8.7	Blue
<b>Fixed-Side Mini Pulley / Single Sheave</b>						
 43 - 16846	USR-PFB-AU	5000 lbs	0 mm	13 mm	3.0	Orange
<b>Aluminum Swing-Side Pulley/Twin Sheave</b>						
 43 - 16848	USR-PTW-AU	30kN	0 mm	16 mm	14.9	Orange

## Fiddle Block Hauler Kit from U.S. RIGGING

Fiddle block hauler kit. Features include 75' ft of 1/2" low-stretch load pro rope, progressive capture with bulldog pursik, two steel carabiners and a 5:1 mechanical advantage. Weight lift limit is 1000 lbs.



Rotary #	OEM	Material	Color	WLL	Sheave Dia.	Shackle
43 - 16854	USR-HAULER-75AP	Anodized Aluminum	red	1000 lb.	2"	-

## Aluminum Uni-Body Fiddle Block Rope Set from U.S. RIGGING

Anodized aluminum uni-body frame. Hard anodized aluminum sheaves. Non corroding Delrin bearings. Triple sheave system separates rope and helps to reduce chafing. Includes 50' ft of 1/2" rope. 4:1 Mechanical Advantage



Rotary #	OEM	Material	Color	WLL	Sheave Dia.	Shackle
43 - 16811	USR-FB-DLXR	Anodized Aluminum	black	1000 lb.	2-5/8"	5/16"

## Futura System Rope Clamps from KONG

A revolution in the rope clamp world for its extremely tiny dimensions and ergonomic shapes. It's the natural marriage between three devices and the best system for ascending a rope. The "Rope Walking System" is like climbing a ladder. After testing the system, users confirm excellent performance and a 30% efficiency gain during ascent.

### Futura Hand from KONG

Its small size allows the user to comfortably hold the device close to the rope, in the same way you would grab a rope but much more comfortably. It comes with two different sized handles for ergonomic customization. Available in right and left versions.



43 - 16925

43 - 16926



43 - 16923

### Futura Body from KONG

Chest ascender, incredibly reduced size and weight, only 80g!

### Futura Foot from KONG

Foot ascender that improves and completes the performance of the Futura Hand ascender and Futura Body chest ascender. Available in right and left versions, equipped with nati-torsion stirrup.



43 - 16927

43 - 16928





Rotary #	OEM	Standards	Material	Color	g	Rope min./mm	Rope max./mm
<b>FUTURA HAND</b>							
43 - 16925	87600N4SKK (left)	EN 12841/B	alu alloy	orange, black	125	8	12
43 - 16926	87600NO4DKK (right)	EN 12841/B	alu alloy	black, orange	125	8	12
<b>FUTURA BODY</b>							
43 - 16923	94200NO00KK	EN 567/EN 12841/B	alu alloy	black, orange	80	9	12
<b>FUTURA FOOT</b>							
43 - 16927	87609O04DKK (right)	EN 567/ EN 12841/B	alu alloy	orange	130	8	12
43 - 16928	87609N04SKK (left)	EN 567/ EN 12841/B	alu alloy	black	130	8	12

## Port-A-Wrap from BUCKINGHAM

Buck Port-A-Wraps are compact rope friction devices designed for lowering heavy objects from height in a controlled and predictable manner. Made from nickel plated steel. With the Buck Port-A-Wrap lowering heavy wood can be controlled and done at a much faster pace while also lowering the potential for an accident. The user-friendly design also makes attaching rigging line a breeze.



Rotary #	OEM	Length	OD	Height	Max. Rope Size
<b>Port-A-Wrap Mini</b>					
43 - 17023	601M	5-1/2"	1.32"	6-1/2"	1/2"
<b>Port-A-Wrap Small</b>					
43 - 17021	601N	7-1/2"	1.9"	9"	5/8"
<b>Port-A-Wrap Large</b>					
43 - 17020	601LN	9-1/2"	2.4"	11"	3/4"
<b>Port-A-Wrap XL</b>					
43 - 17022	601XN	13"	3.5"	14"	7/8"



## Tree Fork from KONG

The Tree Fork is for tree climbing and is composed of heavy-load webbing and two different-sized aluminum rings, for recovery from the ground. Available in 3 lengths (90,140 and 230 cm) with different colors. Width 25mm (.98").



43 - 16899



43 - 16900



43 - 16901






Rotary #	OEM	Standards	Color	Material	g	kN	cm/length	cm/width
43 - 16899	210A090Y0KK	EN 795B - EN 354 EN566 - UIAA104	Yellow	polyamide	230	25	90	2.5
43 - 16900	210A140N0KK	EN 795B - EN 354 EN566 - UIAA104	Black	polyamide	305	25	140	2.5
43 - 16901	210A230R0KK	EN 795B - EN 354 EN566 - UIAA104	Red	polyamide	435	25	230	2.5



## ArborMaster Friction Savers from BUCKINGHAM


Allow for easy installation and retrieval from the ground. Benefits include less bend radius, less friction (easier to climb) and reduced wear to a rope. Can be used as a false crotch. Ring is made of aluminum. Rated for human support only.

Rotary #	OEM	Standards	Length
 43 - 17032	57-48	ANSI Z133.1-2012	48"
 43 - 17033	57-60	ANSI Z133.1-2012	60"
 43 - 17034	57-72	ANSI Z133.1-2012	72"



## SuperSaver from BUCKINGHAM


The SuperSaver is the next generation Friction Saver and Canopy Anchoring Device designed to grow with the climber and is the most revolutionary and versatile adjustable Friction Saver and Canopy Anchor combination ever seen.

Rotary #	OEM	Length	Width	Color
 43 - 17058	64-6	6'	2-1/2"	Black, Green



## Buck Retrieval Key from BUCKINGHAM

Buck retrieval key is used to easily retrieve your friction saver from the ground. The retrieval ring passes through the larger ring to release the friction saver. 8-1/4" Dyneema cord.

Rotary #	OEM	Length	Ring Width
 43 - 17035	57KEY	8-1/4"	1-1/8"



## Earmuffs from KONG



43 - 16939



43 - 16940



43 - 16941



Noise reduction 3M Peltor headphones available in 3 versions with different levels of acoustic insulation. All models conform to UNI EN 352-3 norm. New version electrically insulated.

Rotary #	OEM	Standards	Color	g	Noise Reduction
43 - 16939	999130000KK	EN 352-3	Red	255	32 dB
43 - 16940	999140000KK	EN 352-3	Yellow	225	30 dB
43 - 16941	999160000KK	EN 352-3	Green	185	26 dB

## Earmuffs from KASK



43 - 16959



43 - 16960



Attaches directly to all Zenith Series helmets. Requires Plasma Earmuff Adaptors to attach to all Plasma, Superplasma and HP series helmets.

Rotary #	OEM	Standards	Color	g	Noise Reduction
43 - 16959	WHP00004	-	Green	280	23-25 dB
43 - 16960	WHP00005	-	Yellow	320	28-38 dB

## Earmuff Adaptor from KASK

Bayonet ear muff adaptor for integrating hearing protection on Plasma, Super Plasma and HP helmets.

Rotary #	OEM
43 - 16966	WAC00003





43 - 16937



43 - 16935



43 - 16936






## SPIN Professional shock-absorbing Helmet from KONG

- Professional shock-absorbing helmet.
- Comfortable and well-ventilated interior that also guarantees a perfect fit.
- Removable and washable padding.
- Equipped with 4 durable clips for mounting headlamps.
- UNI Size
- Conforms to ANSI/ISEA Z89.1 and CE EN 397.



43 - 16938



Rotary #	OEM	Standards	Material	Color	 g	Size	cm
 43 - 16935	99720AW10KK	EN397 ANSI/ISEA Z89.1	ABS	White	385	UNI	52/62
 43 - 16936	99720AO10KK	EN397 ANSI/ISEA Z89.1	ABS	Orange	385	UNI	52/62
 43 - 16937	99720AY10KK	EN397 ANSI/ISEA Z89.1	ABS	Yellow	385	UNI	52/62
 43 - 16938	99720AR10KK	EN397 ANSI/ISEA Z89.1	ABS	Red	385	UNI	52/62

## Zenith X Safety Helmet from KASK

- Electric shock protection
- Integrated slots for attaching ear and face protection
- Lamp carrying clips
- Optimized top and side impact protection
- High tech quick drying comfort fabric



43 - 16948



43 - 16949



43 - 16947



43 - 16950



43 - 16951



43 - 16954



43 - 16955

HI-VIZ



**KASK**

Rotary #	OEM	Standards	Material	Color	Size	cm
<b>Zenith X</b>						
43 - 16947	WHE00082.201	ANSI Z89.1 EN 12492	HD polypropylene	White	UNI	53/63
43 - 16948	WHE00082.208	ANSI Z89.1 EN 12492	HD polypropylene	Blue	UNI	53/63
43 - 16949	WHE00082.202	ANSI Z89.1 EN 12492	HD polypropylene	Yellow	UNI	53/63
43 - 16950	WHE00082.204	ANSI Z89.1 EN 12492	HD polypropylene	Red	UNI	53/63
43 - 16951	WHE00082.210	ANSI Z89.1 EN 12492	HD polypropylene	Black	UNI	53/63
<b>Zenith X Hi Viz</b>						
43 - 16954	WHE00083.201	ANSI Z89.1 EN 12492	HD polypropylene	White	UNI	53/63
43 - 16955	WHE00083.396	ANSI Z89.1 EN 12492	HD polypropylene	Green	UNI	53/63



## Zenith X Air Safety Helmet from KASK

- Eight air intakes for exceptional breathability
- Integrated slots for attaching ear and face protection
- Lamp carrying clips
- Optimized top and side impact protection
- High tech quick drying comfort fabric



43 - 16956



43 - 16953



43 - 16952








43 - 16958



**COMBO**  
43 - 16957



**KASK**

Rotary #	OEM	Standards	Material	Color	Size	cm
<b>Zenith X Air</b>						
 43 - 16952	WHE00084.204	ANSI Z89.1 EN 12492	HD polypropylene	Red	-	-
 43 - 16953	WHE00084.202	ANSI Z89.1 EN 12492	HD polypropylene	Yellow	-	-
 43 - 16956	WHE00084.201	ANSI Z89.1 EN 12492	HD polypropylene	White	-	-
 43 - 16958	WHE00084.210	ANSI Z89.1 EN 12492	HD polypropylene	Black	-	-
<b>Zenith X Air Combo</b> <i>includes earmuffs and metal mesh face shield</i>						
 43 - 16957	WHE00086.221	ANSI Z89.1 EN 12492	HD polypropylene	Fluorescent Yellow	-	-

 **WARNING:**  
Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



43 - 16942



43 - 16943



43 - 16944



43 - 16945



43 - 16946

### Super Plasma Safety Helmet from KASK

- Ten intake vents designed to keep out debris
- Lamp carrying clips
- Attachment for fitting visors & earmuffs
- High tech quick drying comfort fabric

**HI-VIZ**

**KASK**

Rotary #	OEM	Standards	Material	Color	Size	cm
<b>Super Plasma</b>						
43 - 16942	WHE00036.201	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	White	UNI	51/62
43 - 16943	WHE00036.210	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Black	UNI	51/62
43 - 16944	WHE00036.204	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Red	UNI	51/62
<b>Super Plasma Hi Viz</b>						
43 - 16945	WHE00037.224	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	Fluorescent Lime	UNI	51/62
43 - 16946	WHE00037.201	ANSI Z89.1, CSA Z94.1 EN 12492	ABS	White	UNI	51/62



## Helmet Visor from KONG

- Helmet Visor resistant to surface damage caused by fine particles and mist.
- Made of high-quality polycarbonate of Japanese origin.
- Extremely robust, it prevents from:
  - High-speed projection (120 m/s) of particles at room temperature (class B)
  - Ultraviolet radiation (smoked version only 997.056F)
- Available in transparent and smoked version.
- Conform to CE EN 166.

The included mounting kit can easily be assembled with Mouse, Spin and Leaf helmets thanks to the pre-marked holes in the shell.






43 - 16933



43 - 16934



Rotary #	OEM	Standards	Material	Color	 g
 43 - 16933	997056F00KK	EN 166	polycarbonate	smoked	80
 43 - 16934	997056P00KK	EN 166	polycarbonate	transparent	80

## Half Face Helmet Visor from KASK

Half face visor for Plasma, Super Plasma and HP helmets. Features anti-fog treatment, impact, abrasion and dust resistant. Compatible with glasses.






43 - 16961



43 - 16962



Rotary #	OEM	Standards	Material	Length	Color	 g
 43 - 16961	WV100018.500	ANSI Z87+	polycarbonate	4.3"	transparent	80
 43 - 16962	WV100018.510	ANSI Z87+	polycarbonate	4.3"	smoked	80

## Mesh Visor from KASK

Mesh visor for Plasma, Super Plasma and HP helmets. Hexagonal mesh provides good visibility and ventilation. Allows use of glasses. Requires visor carrier and attachment.



**KASK**



43 - 16963




43 - 16964

Rotary #	OEM	Standards	Length	g
<b>Mesh Visor</b>				
43 - 16963	WVI00006	EN 1732, ANSI Z87.1, CSA Z94.3	7.4"	42
<b>Mesh Visor Carrier</b>				
43 - 16964	WVI00005	-	-	-

## Visor Carrier Attachment from KASK

Designed for integrating mesh full-face visors to Plasma, Super Plasma and HP helmets. 30mm



**KASK**

Rotary #	OEM
43 - 16965	WAC00008

## Visor Screw Set from KASK

Designed for fastening Kask eye protection to Plasma, Super Plasma, and HP helmets.



**KASK**



Rotary #	OEM
43 - 16967	WAC00005



## Full Face Visor for Zenith Helmet from KASK

The Kask Zen Full Face Visor for Kask Zenith Helmets feature a panoramic lens made from polycarbonate and treated for anti-fog and scratch resistance. This visor has an ergonomic, reinforced frame to protect your face from debris. To attach Zen Visors to your Zenith Helmet, you will need a Kask adapter set for Zenith Visors.





Rotary #	OEM	Standards	Material	Length	Color	 g
 43 - 16968	WVI00008.500	ANSI Z87+	polycarbonate	7.4"	transparent	120

## Mesh Visor Kit for Zenith Helmet from KASK


The Zen Mesh visor by Kask is full-face protection for the Kask Zenith that is lightweight and durable. The Zen visor requires the Zenith Visor Adapters and the Zen Visor Carrier to fit the visor to the Zenith helmet (**not included**).



Rotary #	OEM	Standards	Material	Length	Color	 g
 43 - 16969	WKI00012	ANSI Z87+, EN 166	metal mesh	-	transparent	68

## Zen Visor Brim Kit from KASK

Kask's Zen Visors are for use with Kask Zenith Helmets.

Rotary #	OEM
 43 - 16976	WAC00007



## Zenith Visor Kit from KASK

The Zen visor has a wide field of view and is anti-fog and scratch resistant for unmatched visibility while keeping you safe. The panoramic lens is also compatible for workers with prescription glasses and easily overlaps without interfering with glasses. The drip proof upper contour is made of rubber. The Zen visor also has a cut proof edge for added safety.


**KASK**

Rotary #	OEM	Standards	Material	Length	Color	g	Size
<b>Zenith Visor Kit with adapters</b>							
43 - 16970	WKI00002.500	ANSI Z87, EN 166	polycarbonate	-	clear	-	UNI
43 - 16971	WKI00002.510	ANSI Z87, EN 166	polycarbonate	-	smoke	-	UNI
<b>Zenith Visor Only</b>							
43 - 16972	WVI00007.500	ANSI Z87.1	polycarbonate	4.3"	clear	-	-
43 - 16973	WVI00007.510	ANSI Z87.1	polycarbonate	4.3"	smoke	-	-

## Zenith Clear Full Visor Kit from KASK

(Zen FF visor + adapters + carrier+ peak)

Full face clear visor kit for Zenith helmet. Features anti-fog and scratch resistant treatment, cut proof edge and drip proof upper edge and drip proof upper contour. Can be used with glasses.


**KASK**

Rotary #	OEM	Standards	Material	Color	g	Size
43 - 16975	WKI00010.500	ANSI Z87, EN 166	polycarbonate	clear	120	UNI

## Zen Visor Adapter from KASK

Visor adapters for easy click system. Designed to attach visors to Zenith helmets. Secures to visor attachment slots.






**KASK**


Rotary #	OEM
43 - 16974	WAC00009

## Saddles from BUCKINGHAM

Saddles by Buckingham feature leather back pad material, 4 "D" rings, 5 accessory loops and tongue buckle style straps. Available in sizes Small- X Large.






Rotary #	OEM	Standards	Size	Weight Capacity
 43 - 16994	1371-S	ASTM F887	Small	350 lbs.
 43 - 16995	1371-M	ASTM F887	Medium	350 lbs.
 43 - 16996	1371-L	ASTM F887	Large	350 lbs.
 43 - 16997	1371-X	ASTM F887	XLarge	350 lbs.

## Buckcraft Saddle from BUCKINGHAM

Buckcraft saddle from Buckingham provides you with comfort and all the necessary features. Great saddle option for someone just entering the industry. Features specially designed leg pads that gives proper support, ensures proper blood flow and stays out of the groin area. Waist and leg strap quick connect buckle. Equipped with accessory snaps, rings, and gear loops. Suspension ring breaking strength is 23kN.







Rotary #	OEM	Standards	Size	Weight Capacity
 43 - 16998	17911-S	ASTM F887	Small	350 lbs.
 43 - 16999	17911-M	ASTM F887	Medium	350 lbs.
 43 - 17000	17911-L	ASTM F887	Large	350 lbs.
 43 - 17001	17911-X	ASTM F887	XLarge	350 lbs.

## Navigator Saddle from BUCKINGHAM

Navigator saddle from Buckingham is designed in conjunction with a team of Expert arborist. 100 + years of saddle R&D incorporated into this saddle. Features special air flow legs pads, injection molded rigid backpad for increased comfort, quick connect buckles and 14 points of attachment to maximize your options. This saddle is also equipped for use in a bucket.



Rotary #	OEM	Standards	Size	Weight Capacity
 43 - 17002	1470-S	ASTM F887	Small	350 lbs.
 43 - 17003	1470-M	ASTM F887	Medium	350 lbs.
 43 - 17004	1470-L	ASTM F887	Large	350 lbs.
 43 - 17005	1470-X	ASTM F887	XLarge	350 lbs.

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Chest Harness from BUCKINGHAM

The Bucktop RT Chest Harness can be used in conjunction with a saddle or as stand alone SRT chest harness. Features numerous connection points for personal preference, easy length/size adjustment, light weight breathable padding. BuckTop is not man rated and should never be used for Fall Arrest, Fall Restraint or Work Positioning.



Rotary #	OEM
43 - 17006	U6270



## Harness-Lanyard Combo from BUCKINGHAM

The Buck Harness-Lanyard combo features Bucks new safety green webbing, H-Style harness, interlocking chest and leg buckles to ensure comfort and includes BuckYard Lanyard, a great value add-on. Rated 420 lbs. when used with equivalently rated accessories.



Rotary #	OEM	Standards	Weight Capacity	Length
43 - 17057	U64937Q6	ANSI Z359.11, Z359.13 ASTM F887-13 FOR ARC FLASH. OSHA 1926.954 (B) (1) (ii)	420 lbs.	4.5'



## Steel Tree Climber Kit from BUCKINGHAM

A steel tree climber paired with Buckingham's hook and loop cushion wrap pads that feature a cinch loop, allowing for maximum adjustability that ensures a proper fit. Now features Buckingham's patented GRIP technology that keeps the gaff pointed toward the heart of the pole, which reduces cutouts and maximizes comfort. The climbers are rated to 350 lbs. Dowel & Screw design allows for easy gaff change out.



Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
<b>Steel Tree Climber Kit</b>					
43 - 17010	SBG95K1V-BL	ASTM F887	350 lbs.	4-1/2"	2-1/4"

## Aluminum Tree Climber Kit from BUCKINGHAM

A aluminum tree climber paired with Black hook and loop fastener climber straps. Now features Buckingham's patented GRIP technology that keeps the gaff pointed toward the heart of the pole, which reduces cutouts and maximizes comfort. The climbers are rated to 350 lbs. Dowel & Screw design allows for easy gaff change out. Lightest aluminum climber available. Foot strap offers an increased surface area to added comfort to the top and back of the foot. Comes with Hi-Vis magnetic gaff guards.



Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
<b>Aluminum Tree Climber Kit</b>					
43 - 17012	A95K1V-BL	ASTM F887	350 lbs.	4-1/2"	2-7/16"

## Magnetic Gaff Guards from BUCKINGHAM

Magnetic gaff guards feature a strong magnet that keeps the guards securely attached to all manufacturers pole and tree gaffs. Hi-vis green makes it easy to find in the field.



Rotary #	OEM	Length	Width
43 - 17015	6909M2	1.5"	1"



## Retractable Gaff Guards from BUCKINGHAM

Retractable gaff guards were developed so you never have to worry about losing a gaff guard again. Features a strong magnet that keeps the guards securely attached to all manufacturers pole and tree gaffs. When you are ready to climb, kick the gaff guards off and they will retract automatically.



Rotary #	OEM	Length	Width
43 - 17016	6911	2.5"	2.5"



## Steel Tree Climber with Foot Straps from BUCKINGHAM

A steel tree climber that has a contoured shank, offset stirrup, and dowel & screw style replaceable gaff. The climbers are rated to 350 lbs. and exceeds ASTM F887 standards.



Rotary #	OEM	Standards	Weight Rated	Stirrup Width	Gaff Length
<b>Steel Tree Climber Kit</b>					
43 - 17011	SB95089	ASTM F887	350 lbs.	4-1/2"	2-13/16"



## Two Piece Nylon Foot Strap from BUCKINGHAM

Two piece nylon foot strap with split ring.  
Two piece strap is permanently attached to stirrup ring.




Rotary #	OEM	Length	Width
43 - 17017	21391	28"	1"



## Rope Bag from KONG

This Rope Bag has a drawstring closure along with a rapid nylon clip to secure the storage compartment. The PVC construction of this bag features a reinforced bottom with perforations for maximum breathability. Can store rope up to 200m (656') of 11 mm (.433') rope in its 43 liters capacity storage compartment. It has transparent pocket for name plate label and an interior pocket with zip closure for keeping tools. Equipped with padded shoulder straps and angled closure flap.




Rotary #	OEM	Material	Color	Capacity
 43 - 16932	982502000NK	PVC	Black	43 L

## RopePro Deluxe Bag from BUCKINGHAM

RopePro Deluxe can hold up to 500' of 1/2" rope. Features web loops for tool holsters and extra carabiners. Equipped with seven exterior pockets. Great for helmet and saddle storage as well. Made of water resistant canvas.



Rotary #	OEM	Color
 43 - 17019	4373	Black, Green



## Throwing Bag from KONG

Accessories for rope throwing.  
Two versions of throwing bag, 200 g and 350 g.



Rotary #	OEM	Color	m	g / oz.
43 - 16902	224000000KK	red	-	350/12.3
43 - 16903	224010000KK	orange	-	200/7.05



43 - 16902




43 - 16903

## Vinyl Throwbag from BUCKINGHAM

A Buckingham throw bag with a tight, aerodynamic design. Manufactured in the USA from a durable vinyl/TNX material. The throw bag features heavy nylon stitching and is reinforced with two rows of stitching. High-quality nickel plated 1" ring.



Rotary #	OEM	Ring Size	Weight	Color
<b>Vinyl Throwbag</b>				
43 - 17053	16-10Y	1"	10 oz.	Yellow
<b>Vinyl Throwbag</b>				
43 - 17054	16-16O	1"	16 oz.	Orange



43 - 17053



43 - 17054

## Zing-It Throw Line from BUCKINGHAM

Zing-It throw line to be used with 8 or 10 oz. throwing bag.



Rotary #	OEM	Length	Line Dia	Color
<b>Throw Line</b>				
43 - 17055	17Z2Q1-180	108'	.086"	Yellow





## BuckLaunch Sling Shot from BUCKINGHAM

The Bucklaunch was specially developed to give you the ability to safely launch throw weights in an efficient, accurate, and safe manner. We know how tough it can be to accurately get your line into the canopy, especially when using the hand tossing method. Heights over 100' can be achieved in a safe and accurate manner. Pole length is 4' with extension.



Rotary #	OEM	Head Length	Head Width	Pole Length
<b>BuckLauch Sling Shot</b>				
43 - 17045	1027G	4"	9"	4'
<b>Replacement Tubing for BuckLauch</b>				
43 - 17046	1027GS	-	-	-




## Buck Tool Tether from BUCKINGHAM

Save yourself the worry of dropping a tool with the Buck Tool Tether lanyard that keeps your tools secured. Expands with the user's reach to reduce fatigue and contracts easily to the original length when not in use. Features stretch cord surrounded by tubular nylon webbing, lock stitching at both ends for extra security and adjustable tool loop.



Rotary #	OEM	Standards	Length	Max. Weight Capacity	Color
<b>Tool Tether</b>					
43 - 17049	600071	ANSI/ISEA 121-2018	38" - 51"	15 lbs	Green, Black

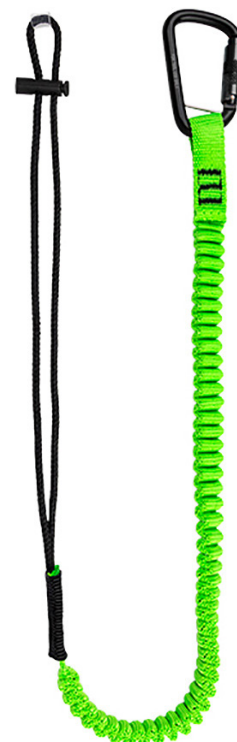

## BuckCarrier Chainsaw Carrier from BUCKINGHAM

Is a light-weight (2.4 oz.) aluminum carrier designed to store your chainsaw on your saddle. It is the lowest profile chainsaw hook on the market and its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers on the market. Can be used to carry practically anything. Fits most popular saddles currently on the market. Made of aluminum.

Rotary #	OEM	Length	Width	Depth
43 - 17037	2402B	4-1/2"	3/4"	1-3/4"



## BuckCarrier Chainsaw Carrier Kit from BUCKINGHAM

Is a light-weight (2.4 oz.) aluminum carrier designed to store your chainsaw on your saddle. Features Buck 2402B carrier paired with a 1" nylon strap that measures 8" in length and may be girth hitched up to a 3" strap. It is the lowest profile chainsaw hook on the market and its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers on the market. Can be used to carry practically anything. Fits most popular saddles currently on the market. Made of aluminum.

Rotary #	OEM	Length	Width	Depth
43 - 17038	2402BQ1	4-1/2"	3/4"	1-3/4"



## Blood Stopper Kit from BUCKINGHAM

Kit contains one large blood stopper to control bleeding until the victim can be administered First Aid on the ground. These are new and improved versions of the blood stopper kit. Kit has the convenience of two separate attachment types. Can easily be clipped to any accessory snap or gear loops on the saddle/belt.

Rotary #	OEM	Length	Width	Color
<b>Blood Stopper Kit</b>				
43 - 17047	4600G9N53	5-1/2"	3-1/2"	Green, Black







# NOTES

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---