



E61 LIMITED EDITION



Date	_____
Project	_____
Location	_____

MODEL | ITEM CODE

E61 S2
E61 S3




E61, THE STORY CONTINUES

It is 1961 and Faema writes an important page in its own history and in that of espresso coffee machines by introducing the E61, an immediate success thanks to its revolutionary technical solutions and its stainless steel elegant body. Faema presents now a new edition of its jewel. Though built maintaining the original design and materials, E61 features updated devices: an automatic boiler fill, a built in volumetric pump, two pressure gauges, to control the pump and the boiler pressure, and the adjustable thermal balancing system (Faema patent). E61 Legend, which features dosed hot water and beverage selections.

Why is it so special E61 is the first machine to use a volumetric pump to give the water the ideal 9-atmosphere pressure and keep the pressure constant during the whole extraction process, unlike lever machines. Furthermore, thanks to the preinfusion system, the extension of the contact time between the water and the ground coffee before extraction favours optimal extraction when it comes to the organoleptic properties of the espresso.

The shape of the myth Though built maintaining the original design and materials, E61 features updated devices linked to its revolutionary technical solutions and its stainless steel elegant body.

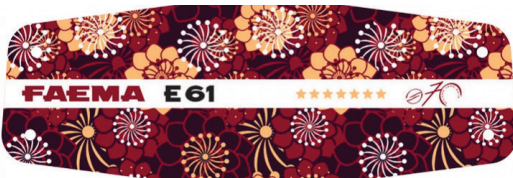

LEGEND LIMITED EDITION

Groups / Groupes	S2
Steam nozzle	1
Hot water nozzle	1
Boiler capacity (litres)	11
Dimensions LxPxH (mm/in)	715x540x565 28.1x21.3x22.2
Weight (kg/lb)	60 / 132
Voltage	208-240V 60Hz
Maximum power/ Puissance maximale 208-240V 60Hz (W)	4200-5600

A new bodywork and a commemorative panel for 70th anniversary, which can be customized in 4 different versions (optional).

Water & Drain Line Requirements

- Cold Water Line: 3/8" dedicated cold water line with shut-off valve, compression fitting and back flow preventer.
- Water Flow: Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/ 5 Bar. Should flow pressure exceed 70 PSI a pressure reducer is necessary.
- Drain: Open gravity drain of minimum 1.25" ID size for hose, within 4 feet of machine.
- Access Hole: There must be a 2 1/2" access hole underneath the machine to connect the water, drain and power supply.

Receptacle

Customer Must supply outlet to match plug. Receptacle must be a max of 40" from machine.



CSA 6-30R



Euro-Milan reserves the right to modify the characteristics of the products illustrated in this publication without prior notice. For misprints and other errors. There may be colour deviations due to the printing process.