

X30



Date	_____
Project	_____
Location	_____

MODEL	ITEM CODE
FAEMA X30 AUTOSTEAM	F01-D6ARLB9DT999A
FAEMA X30 MILK PS	F01-D6BMPB9DT999A



WELCOME TO THE TOUCH REVOLUTION

The new super-automatic Faema offers an unparalleled experience and thanks to its distinctive features, it encourages innovative interaction with the machine. The endless customisation possibilities available through the revolutionary Touch Screen with a 10.4"inch display and the incredible variety of drinks make the X30 revolutionary in the world of super-automatic machines.

RELIABILITY ABOVE ALL The new X30 is the ideal tool for your daily tasks. Thanks to the innovative technical solutions that have always made the Faema machines cutting-edge products, preparing espresso coffee-based drinks will be simple and intuitive, every day.

THE MOST FLEXIBLE AND CUSTOMISABLE INTERFACE X30 has a 10.4" touchscreen display: different ways of viewing the drinks selection, customisable images on the machine display (screen savers, during beverage delivery) and films and sounds to help the customer chose their drink are some of the features offered by the X30. All while being simple and intuitive.

CAPACITIVE TOUCH SCREEN DISPLAY Toughened glass. • Capacitive Touch Screen Panel with 10.4" TFT. • Backlit RGB panel. • RGB lights on the delivery area. • Possibility to add customised images for drinks, films and screen saver using a USB stick. • Bidirectional Wi-Fi as standard.

NEW GRINDERS WITH PGS FUNCTION The first step to perfection is the quality in the cup of an excellent coffee. The Titanium X30 grinders -steel with PVD - are very robust and built to last. Another innovation is the PGS (Perfect Grinding System), which continuously monitors the coffee delivery parameters and automatically re-grinds and doses if necessary, so as to ensure consistency in delivery zand optimal extraction quality.


HQ COLD AND HOT FROTHED MILK The new X30 can prepare both hot or cold frothed milk (Snowmilk), thus expanding the menu with recipes made with coffee, hot chocolate, cold and hot frothed milk. With X30 you can savour hot and cold frothed milk like it was prepared by an expert hand: a unique experience!

AUTO STEAM COLD TOUCH The new AUTO STEAM COLD TOUCH (AS CT) steam wand has an outer surface covered by a specific insulating and non-stick material that keeps it cold before, during and after the delivery of steam. This solution guarantees ease in cleaning by avoiding the presence of milk residues after use.

NEW SERVICES BOILER AND COFFEE HEATER X30 is equipped with two boilers, made from stainless steel with external insulation: the first generates steam and hot water, while the other is dedicated to the preparation of coffee-based beverages. The new coffee boiler preforms better and allows for more consistency in the delivery of Coffee Cream, Americanos etc. The patented Smart Boiler system optimises the performance of hot water and steam avoiding reduced production during rush hours.



Technical Data

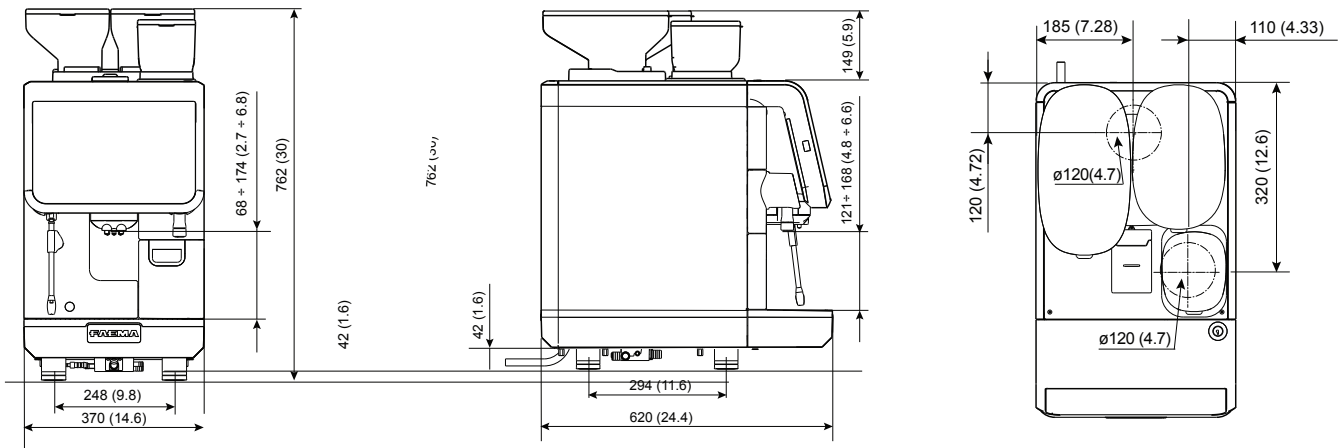

Cup-warmer

Width	290 / 11.4
Depth	435 / 17.1
Max Height	738 / 29



Fridge module 4 litres

Width	290 / 11.4
Depth	435 / 17.1
Max Height	738 / 29



Fridge module 8 litres

Width	290 / 11.4
Depth	435 / 17.1
Max Height	738 / 29

	X30				X30			
	S + AS	CP	CP + AS	CS	DIMENSIONS			
Dose selection keys	24 12 x 2 8 x 3 4 x 6	24 12 x 2 8 x 3 4 x 6	24 1	24 12 x 2 8 x 3 4 x 6	Dimensions L x D x H (mm/inch) 370 x 620 x 762			
Hot water selections	2	2	2	2	Weight (kg) / Gewicht (kg) 79			
Hot water wand	1	1	1	1	Installed power at 220-240V 60Hz-1ph (w) 4800			
Water by-pass / Zusatzwasser	✓	✓	✓	✓	OPTIONAL			
Steam wand / Dampfhöhne	-	1	-	1				
Auto Steam Cold Touch	1	-	1	-				
MilkPS	-	✓	✓	✓				
Snowmilk	-	✓	✓	✓				
Smart Boiler	✓	✓	✓	✓				
PG5	✓	✓	✓	✓				
Boiler	2	2	2	2				
Boiler capacity	0,7 L	0,7 L	0,7 L	0,7 L				
Hot water and steam boiler capacity	1,25 L	1,25 L	1,25 L	1,25 L				
Coffee dosing grinders	2	2	2	2				
Coffee bean hopper capacity	2 x 1,2 Kg	2 x 1,2 Kg	2x 1,2 Kg	1 x 1,2 + 1 x 1,0 Kg				
Solubles hopper	-	-	-	1				
Solubles hopper capacity	-	-	-	1,0 Kg				
Solubles mixer	-	-	-	✓				
Bidirectional Wi-Fi	✓	✓	✓	✓				
USB	✓	✓	✓	✓				
					OPTIONAL			
					S + AS CP CP + AS CS			
					Motorised spout ✓ ✓ ✓ ✓			
					Microfilter ✓ ✓ ✓ ✓			
					Direct emptying ✓ ✓ ✓ ✓			

Water & Drain Line Requirements

- Cold Water Line: 3/8" dedicated cold water line with shut-off valve, compression fitting and back flow preventer.
- Water Flow: Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/ 5 Bar. Should flow pressure exceed 70 PSI a pressure reducer is necessary.
- Drain: Open gravity drain of minimum 1.25" ID size for hose, within 4 feet of machine.
- Access Hole: There must be a 2 1/2" access hole underneath the machine to connect the water, drain and power supply.

Receptacle

Customer must supply outlet to match plug. Receptacle must be a max of 40" from machine.



CSA 6-30R□



Euro-Milan reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be colour deviations due to the printing process.

