


vifa^{PRO}

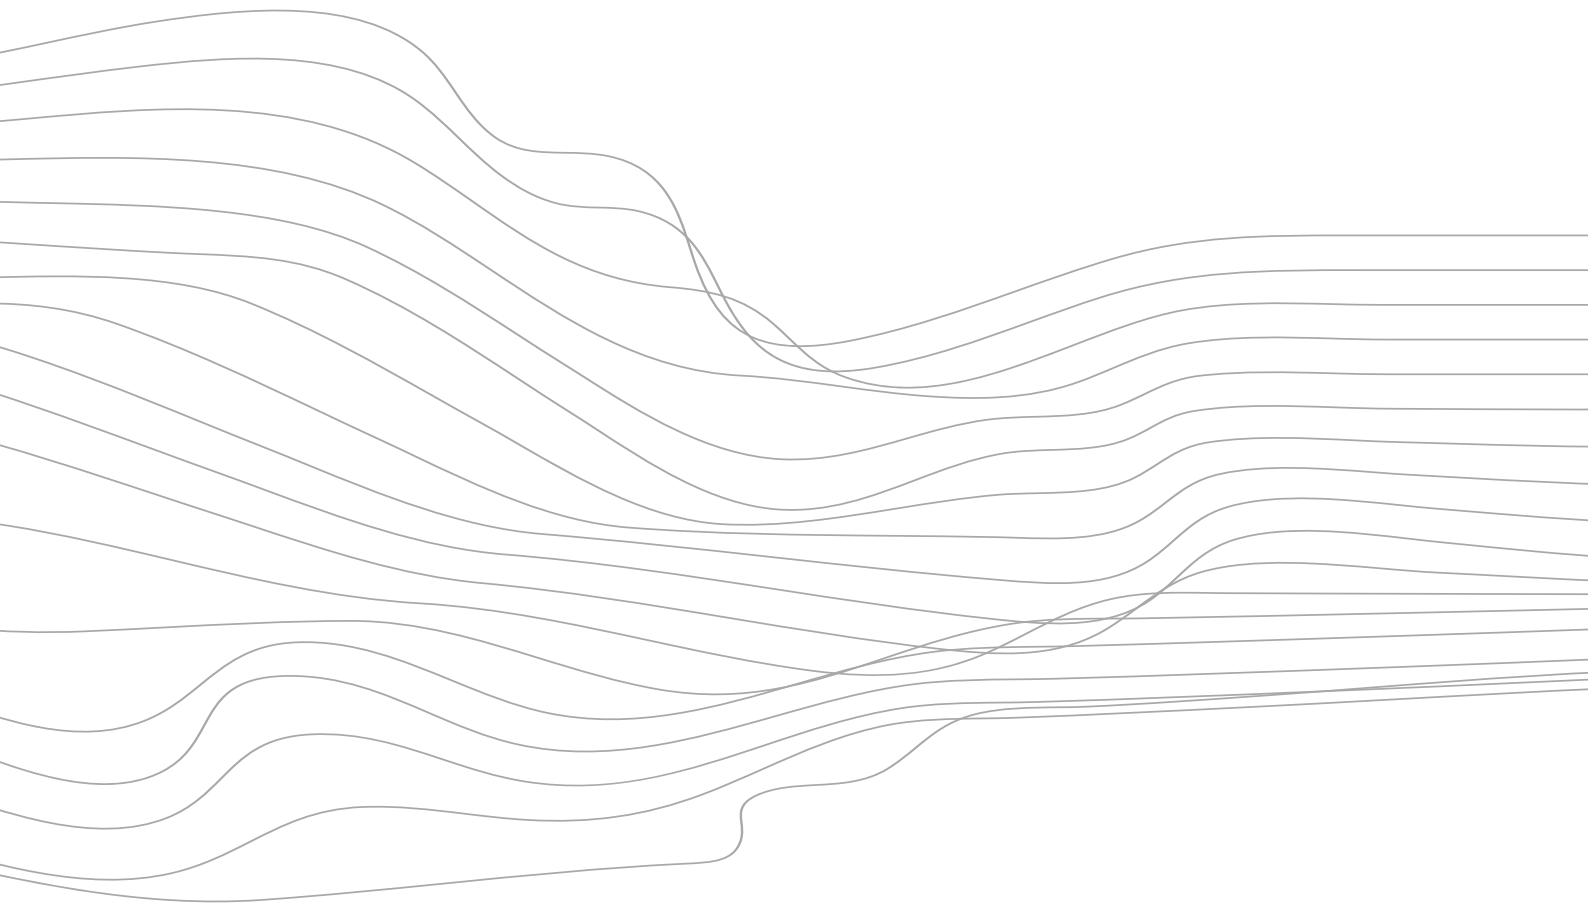

Vifa Denmark APS
Jukkerupvænge 1, 4420 Regstrup, Denmark
www.vifa.dk | info@vifa.dk

Odense 606PN

Two-way Speaker System

Odense 606PN are two-way column speaker with different configurations of mid-bass unit and HF drivers, featuring high sensitivity, clear and bright sound, can be used alone and combined with Odense 18ASUB to form a system to meet the needs of different small and medium-sized places.

Unit configurations: 6×6"neodymium mid-bass units and 2×1"exit throat 44mm neodymium HF driver with line array horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.



Technical specifications

SKU	VIFA-PCS-2606-133-N-W-B	IMPEDANCE	6 ohms nominal
FREQUENCY RESPONSE	80Hz-18kHz	DISPERSION(-6dB)	110°× 25°(-17.5°/+7.5°)
DRIVERS	6×6"(150mm)/1.5"voice coil LF	CROSSOVER	1.8KHz passive
	2×1"(25mm)/1.7"voice coil HF	CONNECTORS	2×Speakon NL4
RATED POWER	480W RMS, 1920W peak	DIMENSIONS	(W)158mm×(D)242mm×(H)1290mm
SENSITIVITY	100 dB 1 watt/1 meter	NET WEIGHT	18kg/pc
MAXIMUM SPL	127 dB continuous, 133 dB peak		

Features

- Clear sound
- Various installation combinations
- Applications:conference rooms, multifunction halls, churches and small touring

Overall dimensions

