



## RXV Tuner Instructions

# CAUTION!


**Failure to follow the instructions given could result in severe damage to your E-Z-GO RXV.**

1. Unplug your charger and turn your key switch to the N position.
2. Locate your diagnostics port on the passenger side of the cart under the seat. It can be hard to find but it's usually zip tied to the main positive cable and has a black dust cover.




**If you have a round black diagnostics port, you'll need to purchase the diagnostics port repair kit. Using the square connector of the Tuner in a black round port on the cart may kill the controller. Please only connect our Tuners to white square ports.**

3. Plug in your RXV Tuner to the diagnostics port, it can only be plugged in one way and requires very little force.

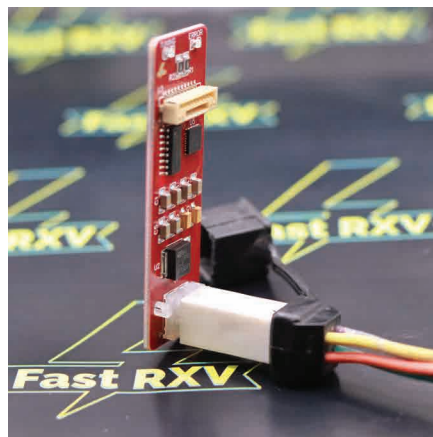

4. You should see both red and orange lights turn on momentarily then 1-10 seconds later you should see the tuning light turn solid orange.

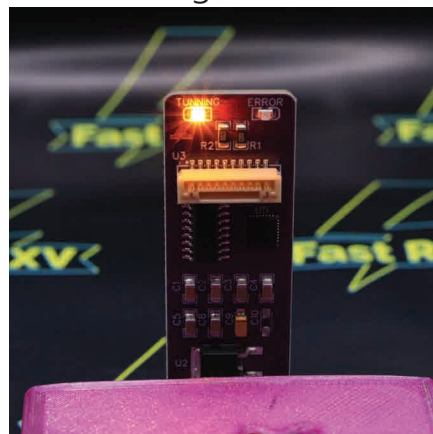

**If you don't get this result, please check the help section on [FastRXV.com](http://FastRXV.com)**

5. Unplug the RXV Tuner and replace the dust cover. Store the tuner in the bag it came in.