

## Stratos 36 - 12" Hybrid EXT Lollipop - HBT (SUBJECT TO CHANGE)

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	MODULE SIZE	CAM SIZE	STRING	POWER CABLE
HBT 2	65 / 70 / 75%	7 5/16	36 11/16	31	A	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	30 3/4	a	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	30 1/2	B	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	30 1/4	b	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	30	C	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	29 3/4	c	2.2	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	29 1/2	*D	2.1	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	29 1/4	d	2.1	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	29	E	2.1	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	28 3/4	e	2.1	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	28 1/2	F	2.1	2	58.95	40.35
	65 / 70 / 75%	7 5/16	36 11/16	28 1/4	f	2.1	2	58.95	40.35

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	MODULE SIZE	CAM SIZE	STRING	POWER CABLE
HBT 1	65 / 70 / 75%	7 1/8	36 9/16	28	A	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	27 3/4	a	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	27 1/2	B	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	27 1/4	b	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	27	C	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	26 3/4	c	1.2	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	26 1/2	*D	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	26 1/4	d	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	26	E	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	25 3/4	e	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	25 1/2	F	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	25 1/4	f	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	25	G	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	24 3/4	g	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	24 1/2	H	1.1	1	56.00	39.85
	65 / 70 / 75%	7 1/8	36 9/16	24 1/4	h	1.1	1	56.00	39.85

\*=Shipped Module Position

Model Year: 2023

Model: Stratos 36

Limb: 12" Hybrid EXT Lollipop

Pocket: B1

Pocket Dowel: B1

Rocker: 18 & 19

Limb Bolt Length: 1.75" SHCS

Roller Guard: #26


Limb Shox: N/A

Stealth Shot Bar: 4.50" HBT 1

Stealth Shot Bar: 5.00" HBT 2

String Model: IN4 HBT 1 & IN2 HBT 2

Date: 8/17/22

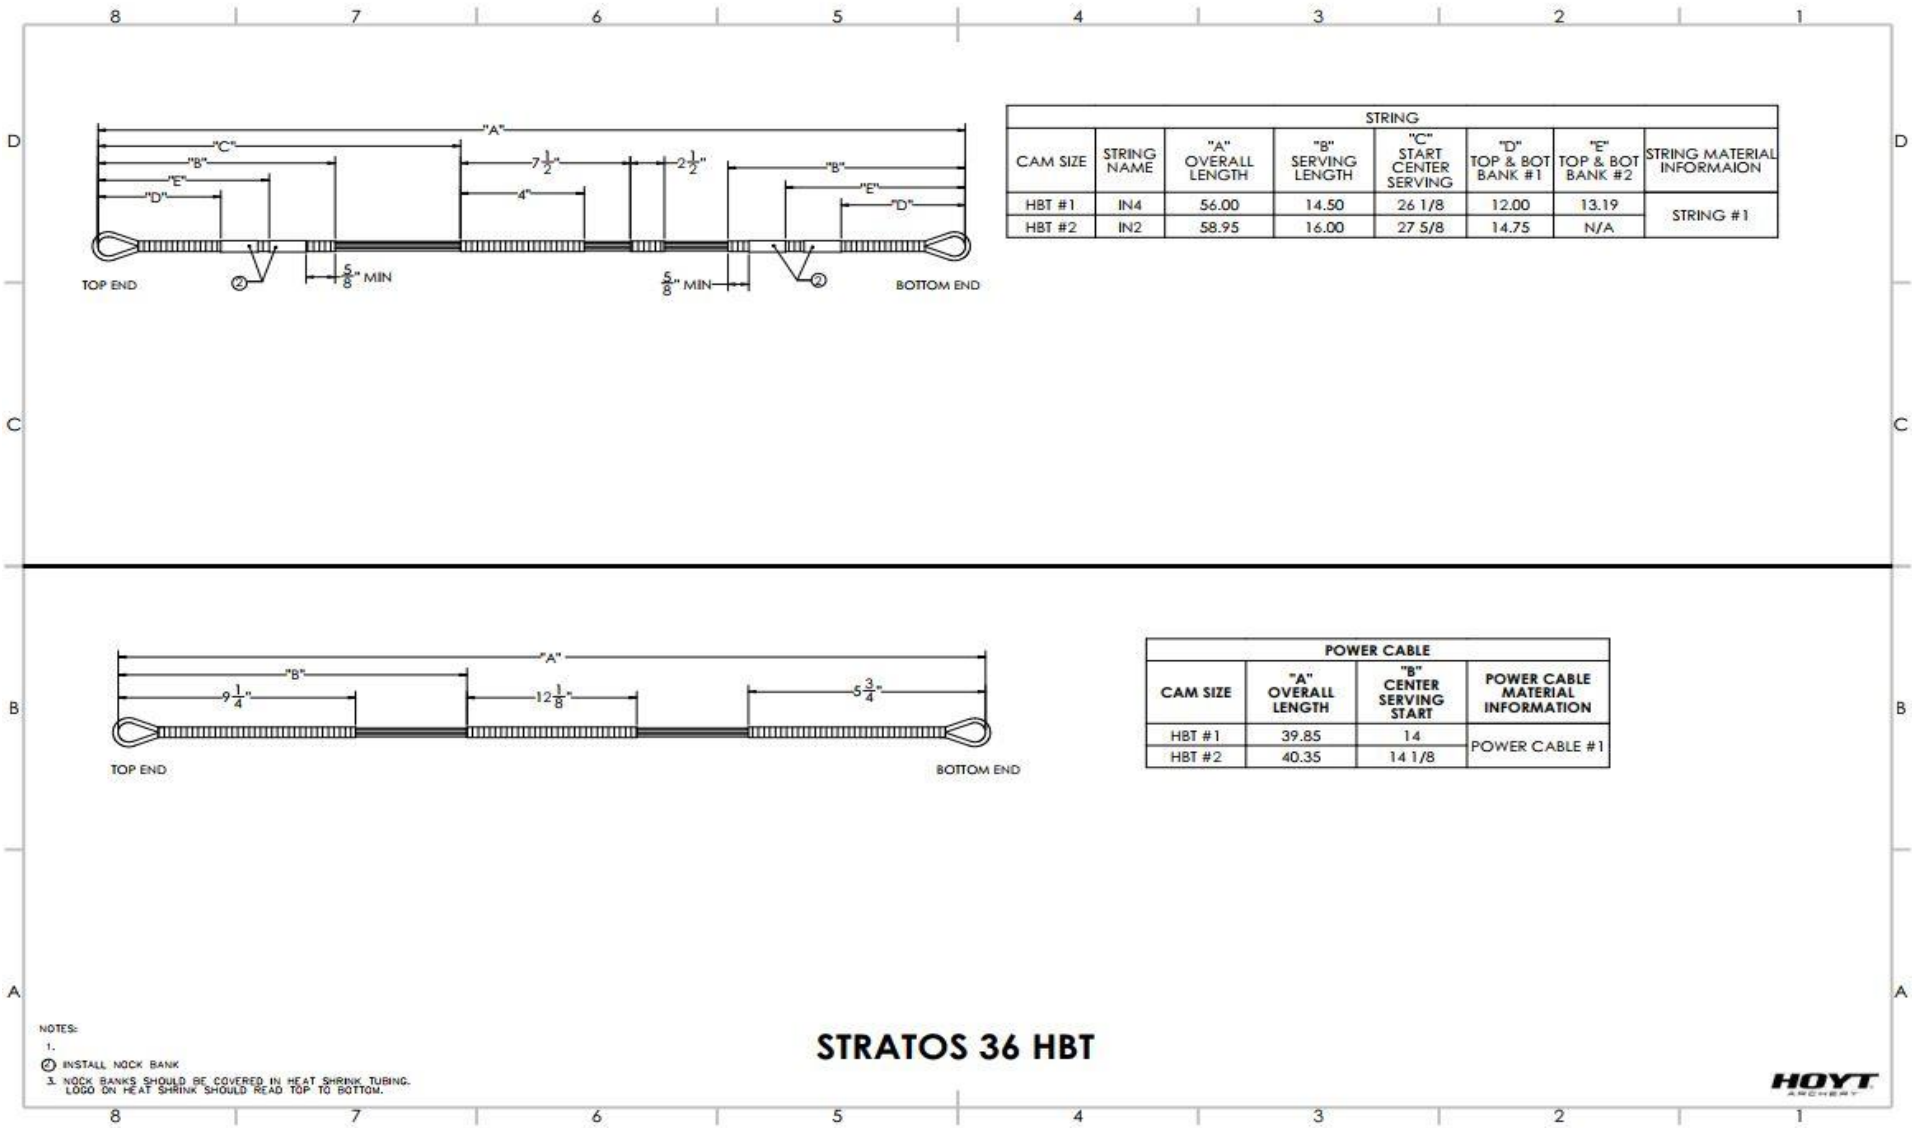

- NOTES:
- 1.
  2. INSTALL NOCK BANK
  3. NOCK BANKS SHOULD BE COVERED IN HEAT SHRINK TUBING. LOGO ON HEAT SHRINK SHOULD READ TOP TO BOTTOM.

## STRATOS 36 HBT



### After Market String Warning

**Warning:** Never use aftermarket strings or cables on your bow. Aftermarket strings and cables may not be suitable for replacement on your Hoyt bow. Hoyt cannot guarantee that the materials or the manufacturing methods used by aftermarket string and cable manufacturers will be suitable for use on your Hoyt bow. Failure to heed this warning could result in serious injury or death to yourself or bystanders. Only Genuine Hoyt or Fuse branded strings and cables should be used on your Hoyt bow.

**Warning:** Never move, remove, or add additional string weights to your Hoyt bow's string or cables. String weights are specifically engineered for weight and location to ensure correct operation of your bow. Alterations to string and cable speed weights could cause your bow to break or malfunction and cause serious injury or death.