




INSTALLATION INSTRUCTIONS

PART No. 30465 & 50465

MODEL No.

Wire Mesh Guard Set

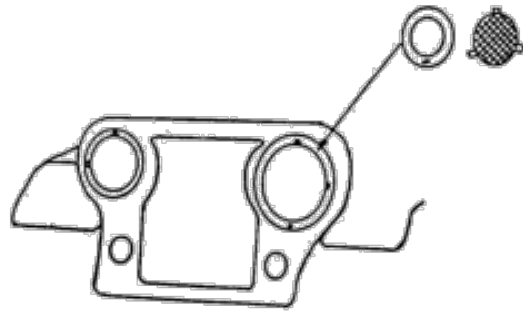

Instructions:

Remove Headlight Bezel, position and place the headlight wire mesh cover over the headlight retaining ring. Push wire mesh cover on the retaining ring. Put the Headlight Bezel in place and refasten, using existing screw.

Remove the two screws holding the plastic parking lens in place. Position and align the wire mesh cover and fasten, using screws and washers provided.

Remove the four taillight screws holding the plastic lens in place. Position and align the wire mesh cover and fasten, using screws and washers provided.




INSTALLATION INSTRUCTIONS

PART No. 30465 & 50465

MODEL No.

Wire Mesh Guard Set

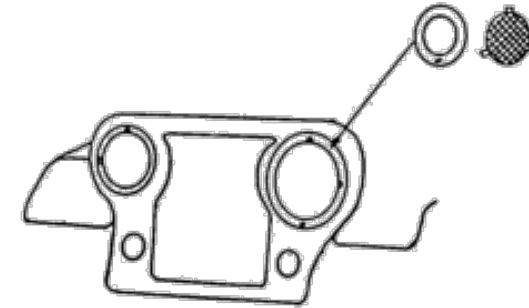

Instructions:

Remove Headlight Bezel, position and place the headlight wire mesh cover over the headlight retaining ring. Push wire mesh cover on the retaining ring. Put the Headlight Bezel in place and refasten, using existing screw.

Remove the two screws holding the plastic parking lens in place. Position and align the wire mesh cover and fasten, using screws and washers provided.

Remove the four taillight screws holding the plastic lens in place. Position and align the wire mesh cover and fasten, using screws and washers provided.