



INSTALLATION INSTRUCTIONS

PART No. 30443, 50443

**Stainless Steel Outback Mirrors
for Jeep® vehicles 1976 - current**



REQUIRED TOOLS

14MM WRENCH
13MM WRENCH

KIT CONTAINS

STAINLESS MIRROR HEADS AND HARDWARE
STAINLESS MIRROR ARMS
STAINLESS NYLOC NUTS
NYLON WASHERS
STAINLESS WASHERS
PLASTIC BUSHING (FOR JK ONLY)

QTY

2 EACH
2
2
4
4
2



INSTALLATION INSTRUCTIONS

PART No. 30443, 50443

**Stainless Steel Outback Mirrors
for Jeep® vehicles 1976 - current**

1) Remove doors

Remove your Jeep doors and locate the upper door hinge on the driver's side.

2) Install Mirror Arm

Install a SS (stainless steel) washer then nylon washer onto the threaded end of the mirror arm. **For the JK model only**, also install the supplied plastic bushing (figure 1). This is not needed for CJ/YJ/TJ models (figure 2).



Figure 1: JK model - install SS washer, nylon washer, then plastic spacer on mirror arm.



Figure 2: CJ / YJ / TJ model - install SS washer then nylon washer.

Install mirror arm into the door hinge. From the bottom, install another nylon and SS washer, followed by a nyloc nut. Make sure the nylon washers are sandwiched between the SS washers

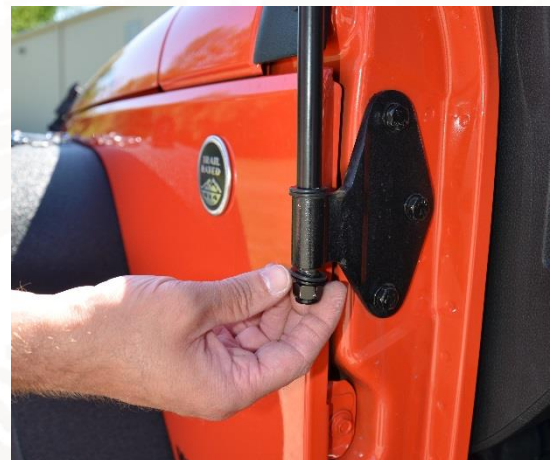


Figure 3: Install nylon washer, SS washer, then nyloc nut.



INSTALLATION INSTRUCTIONS

PART No. 30443, 50443

**Stainless Steel Outback Mirrors
for Jeep® vehicles 1976 - current**

and in contact with the door hinge to prevent paint damage.

Tighten the nyloc nut using a 14mm wrench or socket while holding the mirror arm in place (figure 4). Tighten nut until the arm is snug in the door hinge but still loose enough to adjust the arm angle.



Figure 4: Tighten nyloc nut with 14mm wrench.

3) Install Mirror Head

Insert threaded part of mirror head in mirror arm mounting hole. Tighten the mirror head with a 13mm wrench (figure 5).

The tension of the mirror head can be adjusted using the top phillips head screw on the backside of the mirror (figure 6). **DO NOT OVER TIGHTEN.** The mirror should not be so tight that it cannot be adjusted.



Figure 5: Mirror head installed on mirror arm assembly.



Figure 6: Mirror tension adjustment screw.

4) Final Adjustments

Adjust mirror then check and snug all fasteners. Repeat steps for the passenger side mirror.