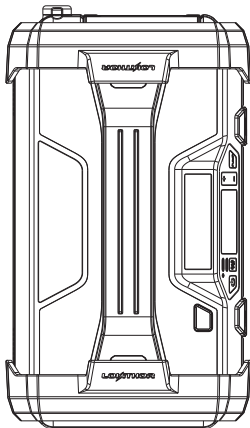










PACKING LIST

	Start Clamp	Inflatable Hose	Nozzle Adapters *4	Large Storage Bag
				
	Small Storage Bag	User Manual	USB-A to USB-C Cable	USB-C to USB-C Cable
				

BRIEF INTRODUCTION

1. Built-in 12V engine emergency start protection device, suitable for LIPO / LIFE / LIPOX batteries.
2. Built-in air pump, supports tire pressure detection, preset charging and stopping, unit switching and other functions, air pressure detection accuracy ± 2 PSI, maximum inflation pressure 150 PSI.
3. LED lighting (luminous flux 500 LUMENS, SOS/strobe/steady light mode switching).




Cars




Boats



Motorcycles




Phone



Tablet



Camera



PARAMETER SPECIFICATION

Model: ApartX	Starting Voltage: 12V
Inflation Pressure Range: 10~150psi	
Input: USB-C 5V/3A、9V/3A、12V/3A、15V/3A、20V/3A (MAX60W)	
Sensor Accuracy: ± 2 psi	Clamp: Red (+) , Black (-)
Charging Temp: 32°F to 113°F(0°C to 45°C)	
Operating Temp: -40°F to 122°F(-40°C to 50°C)	
Storage Temp: -4°F to 122°F(-20°C to 50°C)	