


PRODUCT OVERVIEW

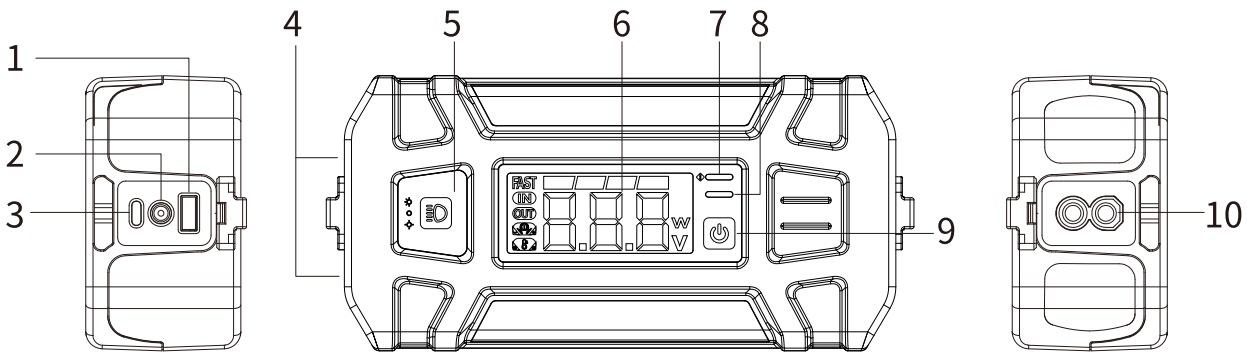

NO.	Function Description	NO.	Function Description
1	USB-A Output (18W Max)	6	Display screen
2	DC Input (60W Max)	7	Red light (Abnormal alarm indicator)
3	USB-C Output/Input (60W Max)	8	Green light (flashing during emergency start, the light keeps on during forced start)
4	LED light	9	Power-on wake-up button
5	LED light power button	10	Jumpstart output

PRODUCT SPECIFICATIONS

Model: J2250/J3250	Starting voltage: 12V
Charging Temperature: 32 °F to 113 °F	Storage Temperature: -4 °F to 122 °F
Operation Temperature: -4 °F to 122 °F	Output USB-A: 5V/3A,9V/2A,12V/1.5A(18W MAX)
Output USB-C:5V/3A,9V/3A,12V/3A,15V/3A20V/3A(60WMAX)	
Input USB-C: 5V/3A,9V/3A,12V/3A,15V/3A20V/3A(60W MAX)	
IP Code: IP65	

PACKING LIST

Product unit	Jumpstart clamps	12V adapter	USB-C cable	USB-A to USB-C cable	User manual