


PRODUCT OVERVIEW

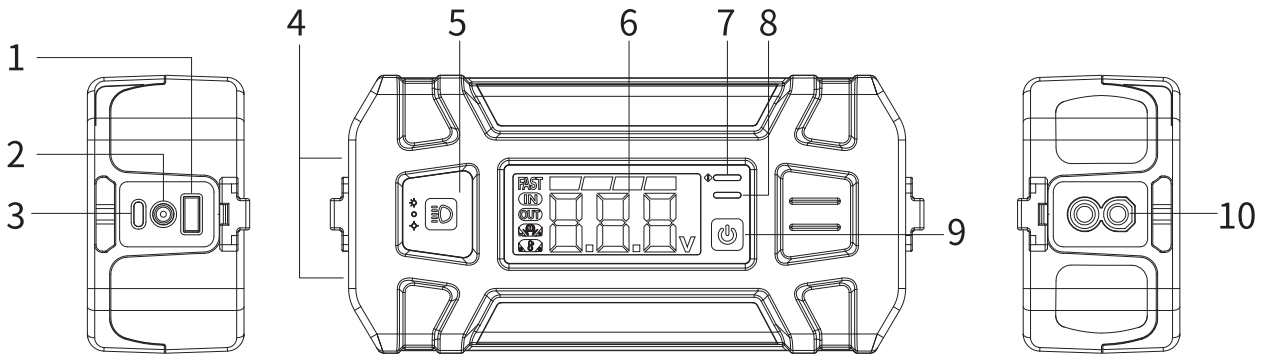

NO.	Function Description	NO.	Function Description
1	USB-A Output (18W Max)	6	Display screen
2	DC Input (60W Max)	7	Red light (Abnormal alarm indicator)
3	USB-C Output/Input (100W Max)	8	Green light (flashing during emergency start, the light keeps on during forced start)
4	LED light	9	Power-on wake-up button
5	LED light power button	10	Jumpstart output

PRODUCT SPECIFICATIONS

Capacity: 74WH	Starting current: 1500A
Starting voltage: 12V	Peak current: 2500A
Jumpstarter clamps: RED (+) 、 BLACK (-)	Charging temperature : 0℃~45℃
Storage temperature: -40℃~50℃	Operating temperature: -40℃~50℃
Output: USB-A 5V/3A, 9V/2A, 12V/1.5A (18W MAX) USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W MAX)	Input: DC: 12V/5A (60W MAX) USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W MAX)
Luminous flux: 300Lumens	IP Code: IP65

PACKING LIST

Product unit	Jumpstart clamps	12V adapter	USB-C cable	USB-A to USB-C cable	User manual