


Install Magnetic Pigtail

Provided Materials:

- 1.) 17" Magnetic Pigtail

Tools Required:

- Philliphead Screwdriver
- Box cutter

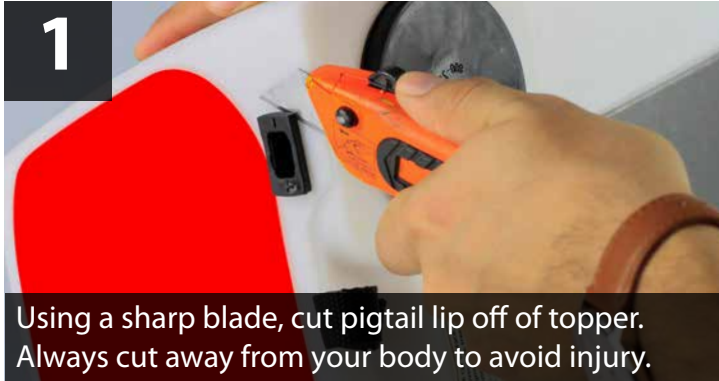

Using a sharp blade, cut pigtail lip off of topper. Always cut away from your body to avoid injury.



Remove screws from bottom of sign and remove the lighting system.



Unplug and remove old pigtail from bottom of sign.



Feed magnetic pigtail into hole and use hand to secure into place. This may require a bit of force.



Plug in new pigtail into light system. Be sure to hide wires as to not cause shadows.



Screw new light system to the topper shell.

If you have questions please call 407.629.0012