


Installing Sign Lock on Topper

Provided Materials:

- Sign Lock
- Washer
- Pin

Tools Recommended:

- Drill w/ 1/4" bit
- Phillips head Screwdriver

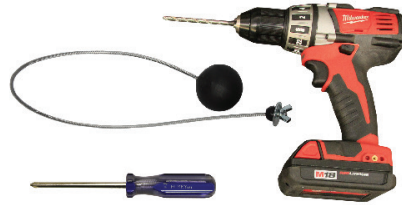


Use the Phillips head screwdriver and remove bottom plate screws to access sign interior.



Drill the 1/4" hole on bottom left corner of the side with the cord connection 1/2" from bottom of sign.



Screw the cable into the sign. Use other hand to place the washer and pin from inside the sign.

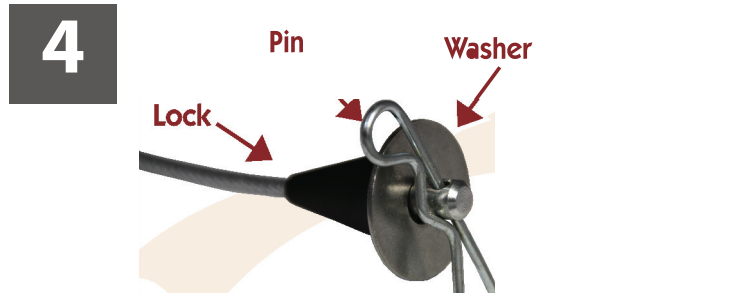

The lock is on the outside of the sign. On the inside of the sign, put the washer first followed by the pin.



Use Phillips head to screw bottom plate light panel back into place.



Ensure that the Sign Lock is on the sign, tight and secure.

If you have questions please call 407.629.0012