BIOTURN 3000 PTO Compost turner

80 to 130 HP PTO driven model Requires a tractor with 2 hydraulic functions

Solid steel construction

Improved rotor design for aggressive compost turn action

Height adjustable

Side hydraulic steering while working and/or towing

The center clearance height allows an ideal compost triangle

Hydraulic lift raises the unit to stop or start the compost turning action at

any point in the row.

Foldable side bar for compact storage and/or transport.

Specifications:

Operating speed: up to 300 m / hour

Weight of the machine: 3 000 kg

Rotor chamber length 3 m

Operational dimensions:

Height: 1.800 m Length 6.000 m


Storage / transport dimensions:

Length: 4.420 m Width: 2.903 m Height: 1.902 m





Improved rotor design for better compost turn action

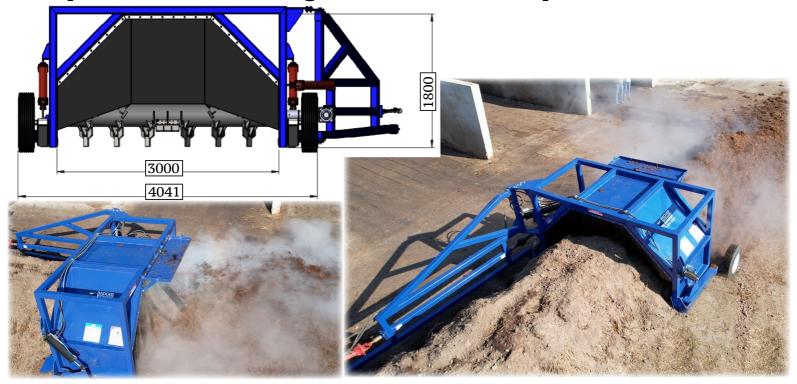

Hydraulic lift raises the complete unit above the compost row.



Foldable side bar for compact storage and/or transport: Length 4.42 m | Width 2.903 m | Height 1.902 m

