
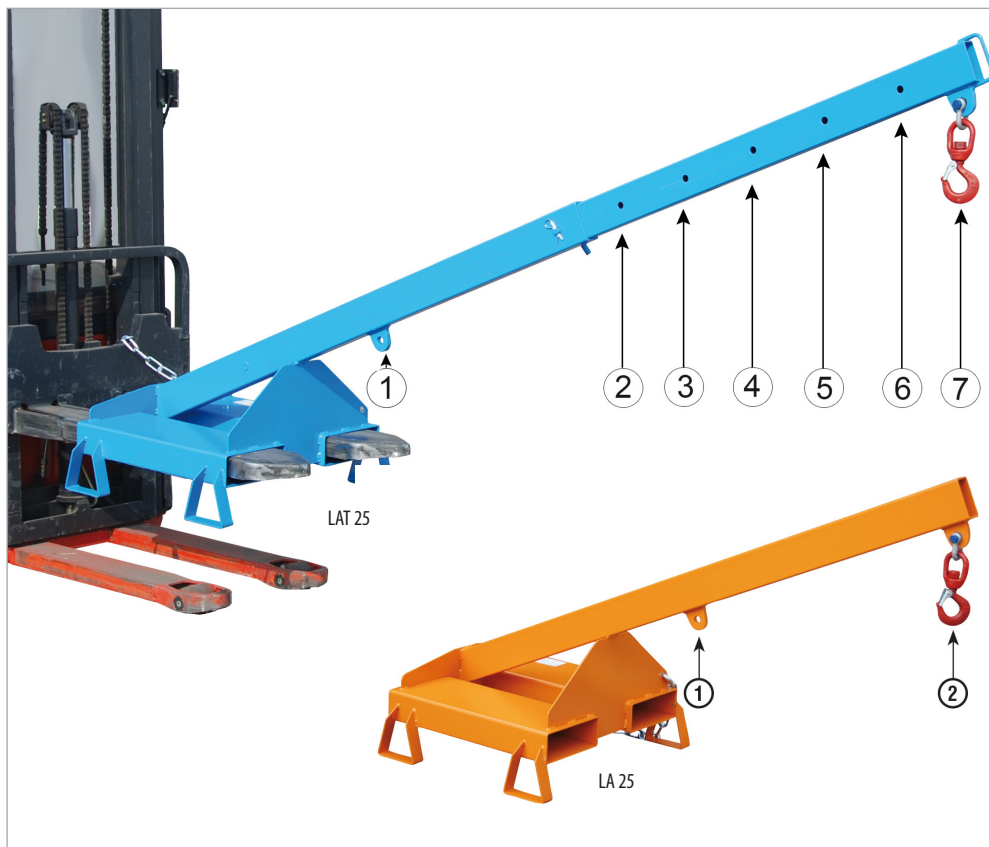


# LOADING ARMS TYPE LA / LAT

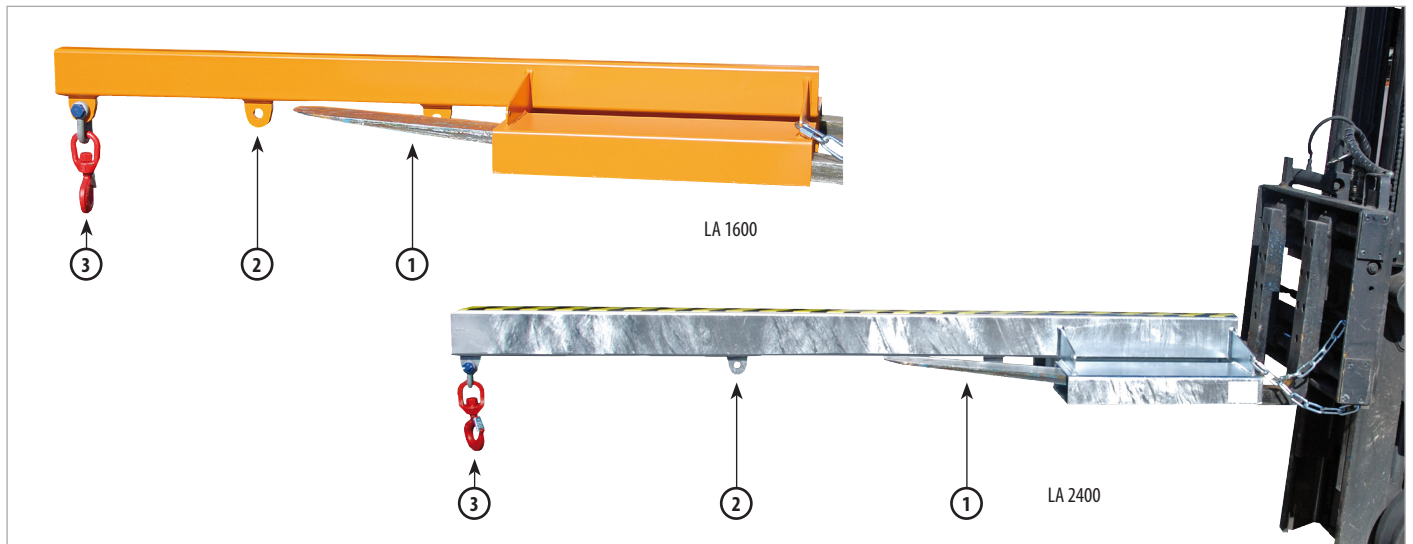

### A loading arm increases the reach of the forklift truck

- steel construction
- fork sleeves for pick-up by a forklift
- also suitable for straddle stackers
- secured by chain to prevent slipping
- 1 swivel hook

### Types available

#### LA 1600/2400

- rigid construction

#### LA 25

- rigid construction
- inclination 25°
- with support legs, 100 mm ground leeway

#### LAT 25

- inclination 25°
- extensible, can be fixed in each position using the pin provided
- with support legs, 100 mm ground leeway

|             | Basic length in mm | Position        | ①    | ②    | ③    | ④    | ⑤    | ⑥    | ⑦    | Weight in kg (paint./galv.) |
|-------------|--------------------|-----------------|------|------|------|------|------|------|------|-----------------------------|
| LA 1600-1,0 | 1600               | distance in mm  | 780  | 1165 | 1550 |      |      |      |      | 42 / 46                     |
|             |                    | max. load in kg | 1000 | 350  | 200  |      |      |      |      |                             |
| LA 2400-1,0 | 2400               | distance in mm  | 780  | 1565 | 2350 |      |      |      |      | 49 / 53                     |
|             |                    | max. load in kg | 1000 | 200  | 100  |      |      |      |      |                             |
| LA 1600-2,5 | 1600               | distance in mm  | 780  | 1165 | 1550 |      |      |      |      | 73 / 79                     |
|             |                    | max. load in kg | 2500 | 850  | 500  |      |      |      |      |                             |
| LA 2400-2,5 | 2400               | distance in mm) | 780  | 1565 | 2350 |      |      |      |      | 88 / 94                     |
|             |                    | max. load in kg | 2500 | 500  | 250  |      |      |      |      |                             |
| LA 1600-5,0 | 1600               | distance in mm  | 780  | 1165 | 1550 |      |      |      |      | 104 / 112                   |
|             |                    | max. load in kg | 5000 | 1700 | 1000 |      |      |      |      |                             |
| LA 2400-5,0 | 2400               | distance in mm  | 780  | 1565 | 2350 |      |      |      |      | 124 / 132                   |
|             |                    | max. load in kg | 5000 | 1000 | 500  |      |      |      |      |                             |
| LA 25-1,0   | 1600               | distance in mm  | 875  | 1600 |      |      |      |      |      | 47 / 51                     |
|             |                    | max. load in kg | 1000 | 300  |      |      |      |      |      |                             |
| LAT 25-1,0  | 1600               | distance in mm  | 875  | 1600 | 1780 | 1960 | 2140 | 2320 | 2500 | 55 / 59                     |
|             |                    | max. load in kg | 1000 | 300  | 225  | 200  | 175  | 150  | 125  |                             |

Remember to check the load capacity of the forklift in question!

