

FORKLIFT SAFETY CAGES TYPE SIKO



SIKO/L

SIKO

Forklift Safety Cages ensure safety for repairs and maintenance work

- sturdy construction made of steel tubing
- non-slip working platform
- number of persons permitted: 2
- full-length fork sleeves with safety mechanism to prevent slipping
- plate to guard against incorrect pick-up; ensures the forks are driven into the fork sleeves
- "DGUV" compliant (German Use of Work Equipment Directive) and approved by the German Association for Technical Inspection "TÜV")

Types available

SIKO

- picked up broadside by a forklift truck
- galvanized tool deposit


SIKO/L

- picked up lengthwise by a forklift truck (narrow base)
- galvanized tool deposit

Accessories

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake
- construction height 225 mm

	Dimensions in mm (l x w x h)	Floor area in mm	Total permitted weight in kg	Weight in kg	Fork sleeve inside dimensions in mm		
					A	B	C
SIKO	1090 x 1200 x 1885	800 x 1200	300	90	600	200	80
SIKO/L	1295 x 810 x 1885	1200 x 800	300	96	160	200	80

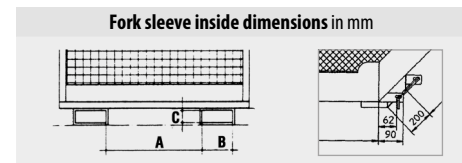


FORKLIFT SAFETY CAGE TYPE SIKO-M




	Dimensions in mm (l x w x h)	Floor area in mm	Total permitted weight in kg	Weight in kg	Fork sleeve inside dimensions in mm		
					A	B	C
SIKO-M	1040 x 835 x 1900	740 x 740	240	58	280	200	80

The economic alternative

- sturdy construction made of steel tubing
- non-slip working platform
- number of persons permitted: 2
- fork sleeves with safety mechanism to prevent slipping
- galvanized tool deposit
- "DGUV" compliant (German Use of Work Equipment Directive) and approved by the German Association for Technical Inspection "TÜV")

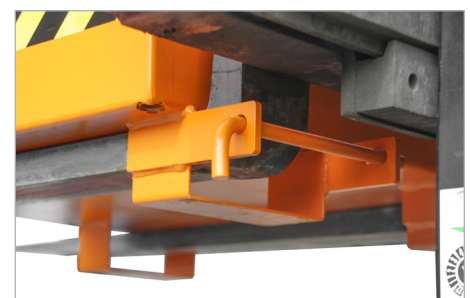

Secured by bolt to prevent slipping

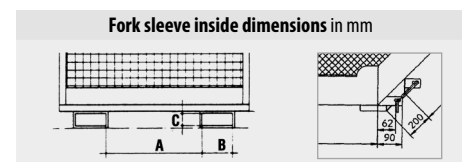

Finish:

RAL 2000