



ALIASIGNAL

Signal Converter

Model AST420 Series

GENERAL

ALIASIGNAL The AST420 Series Signal Converter is a device facilitates the conversion between analog signal and radio signal. It aims to convert 4-20 mA analog signal into radio signal to transmit the analog signal remotely without cable, which is widely used in the occasion of transmitting analog signals over long distances. The wireless communication distance is up to 600 meters, saving a lot of cables. It also isolates the power supply of the signal collection end and the control end of the device to improve the security.


FEATURES

- ❑ Used in pairs, one for the transmitter and one for the receiver
- ❑ One device can transmit two analog signals, signal type 4-20 mA
- ❑ The distance can reach 600 meters and penetrate 3-4 walls indoors
- ❑ With waterproof case, can be used outdoors
- ❑ With ISM433M frequency band communication
- ❑ The transmitter can transmit the analog signal through the ratio while converting the signal to the analog output
- ❑ It has 64 independent channels and can run up to 64 pairs of converters and transmit up to 128 analog signals at the same time

STANDARD SPECIFICATION

- | | | | |
|-------------------------|---|--------------------|---|
| ● Power Supply | : 12-30 VDC | ● Resolution | : 0.01 mA |
| ● Power Consumption | : 0.5W (Average Power Consumption) | ● Accuracy | : +/-0.5% FS |
| ● Analog Input Signal | : 4-20 mA | ● Input Impedance | : 120 Ω |
| ● Analog Output Signal | : 4-20 mA | ● Output Load | : Rohm=(VDC-12) * 50 |
| ● Transmission Range | : ≤600 meters (Indoor: penetrate 3-4 walls) | ● Data Update | : ≤0.5 s |
| ● Communication Mode | : ISM433M Frequency Band Communication | ● Cable Entry | : PG9 (Power cable and signal cable)
PG7 (433M Sucker antenna) |
| ● Operating Temperature | : -20~60 °C | ● Standard Package | : Transmitter + Antenna * 1 set
Receiver + Antenna * 1 set |
| ● Protection Class | : IP67 | | |
| ● Case | : ABS | | |

WIRING DIAGRAM

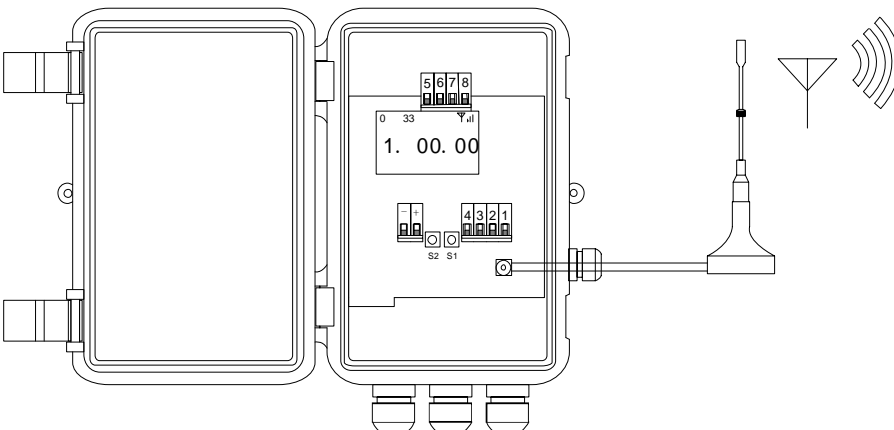

Power Supply	
+	Power Supply:12-30 VDC +
-	Power Supply:12-30 VDC -
Input	
1	Input 1 +
2	Input 1 -
3	Input 2 +
4	Input 2 -
Output	
5	Output 1 -
6	Output 1 +
7	Output 2 -
8	Output 2 +

ALIA TECHNOLOGY LLC


633 W. 5th Street, 26th Floor, Los Angeles, CA 90071, USA
 TEL : + 1 - 213 - 533 - 4139 FAX : + 1 - 213 - 223 - 2317




URL : www.alia-inc.com
 E-mail : alia@alia-inc.com
 AST420V1.2.3.r1.A4.en



➤ Dimensions

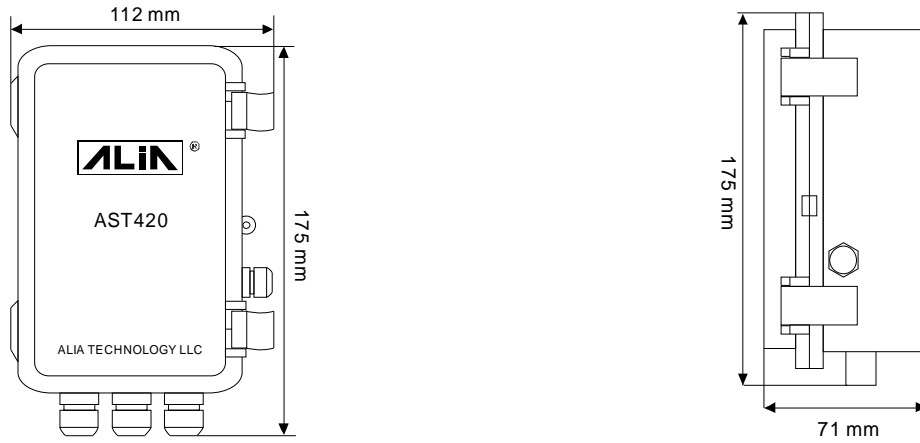

➤ Application 1 (One device)

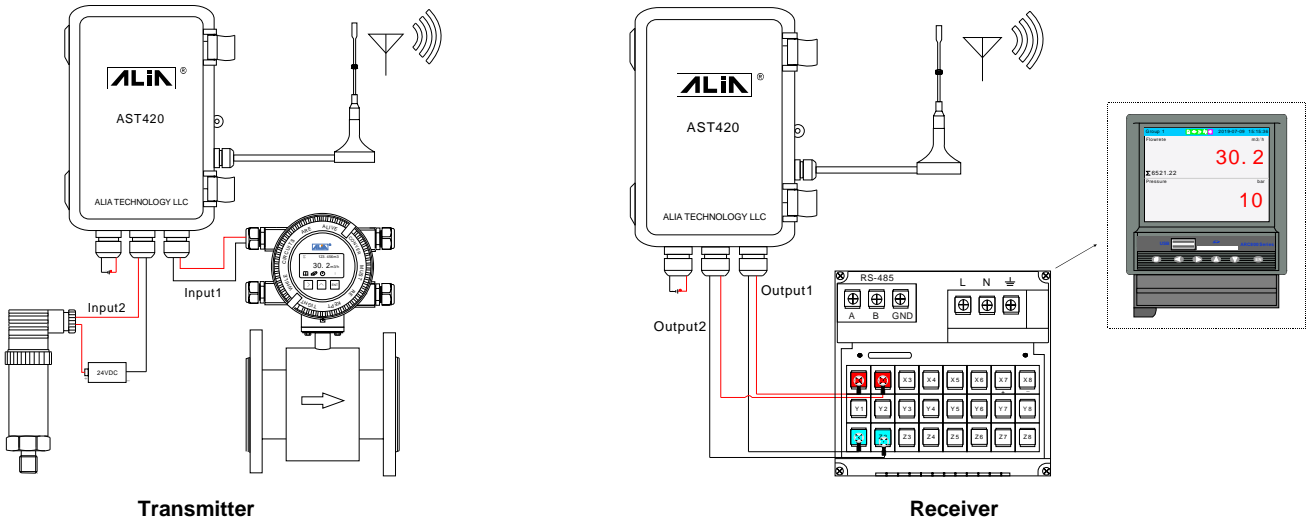

➤ Application 2 (multiple devices, maximum 64 sets)

