


HEAVY DUTY SNATCH BLOCK SWIVEL SHACKLE

Manually operated Snatch Blocks are popular in the Mining, Construction, Off Shore, Rigging and heavy duty lifting applications.

- Made from hi-tensile steel body and cast steel sheave
- Grease nipples fitted with roller and brass bush bearings
- Blocks come with swivel Bow Shackle
- Capacities available from 2 tonne to 50 tonne
- Drop forged, heat treated swivel shackle
- MBS is 5 times of WLL
- Conforms to AS2089. Test Certificate supplied

CODE	WLL	SHEAVER DIAM (mm)	WIRE ROPE (mm)	UNIT WEIGHT (kg)	DIMENSIONS (mm)		
					A	B	C
314102	2	75	8-9	4	286	82	70
314104	4	152	10-13	13.8	400	160	70
314106	6	152	13-16	15	480	180	80
314108	8	203	16-18	16	530	210	93
314110	10	254	18-20	37.5	680	260	115
314112	12	305	20-22	56	767	310	133
314115	15	305	24-26	65	884	310	133
314122	22	355	28-32	90	952	365	140
314130	30	510	32-36	210	1100	510	200
314150	50	610	44-50	418	1140	630	210

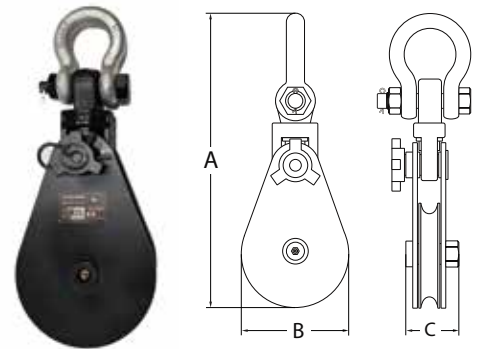

HEAVY DUTY SNATCH BLOCK HOOK TYPE

CODE	WLL	SHEAVER DIAM (mm)	WIRE ROPE (mm)	UNIT WEIGHT (kg)	DIMENSIONS (mm)		
					A	B	C
315104	4	152	10-13	14	430	160	70
315108	8	203	16-18	16.5	550	210	93

Steel Wire Rope References:

6x25Fi+IWRC or 6x36S+IWRC 1770MPa Wire Rope is recommended.

Diameter of the rope can be reduced by using higher tensile rope.

Check wire rope minimum break strength (MBS) and load rating of equipment before operation.

