




GRADE S SHACKLE (DEE TYPE, SAFETY PIN)

The Grade S Shackle (Dee Type, Safety Pin) is most commonly used for lifting applications, providing more permanent connections to Chain, Wire Rope and other rated fitting.

Suitable for equipment that may vibrate to ensure pin will not dislodge during use the Safety Pin allows the pin to rotate during loading conditions.

- Conforms to AS2741 manufactured from Grade "S" material in Dee configuration with Safety Pin hot dipped galvanized.
- Marked with work load limit in tonnes, quality grade, batch numbered, nominal size in millimetre and supplier identification.
- Proof tested to 2 x work load limit, with a minimum break force of 6 x work load limit.
- Suitable for lifting applications. Larger capacities on request

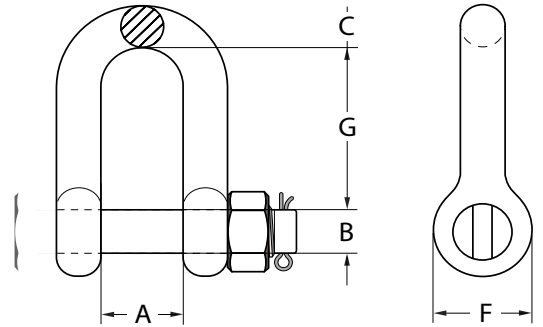

SIZE (mm)	WLL (tonnes)	WEIGHT (kg)	DIMENSIONS (mm)				
			A	B	C	F	G
13	2	0.36	21	16	13	33	41
16	3.2	0.76	27	19	16	40	51
19	4.7	1.23	32	22	19	48	60
22	6.5	1.79	37	25	22	54	71
25	8.5	2.78	43	29	25	60	81
29	9.5	3.75	46	32	29	67	90
32	12	5.31	52	35	32	76	100
35	13.5	6.98	57	38	35	84	113
38	17	9.44	60	44	38	92	124
44	25	15.39	73	51	44	110	146
51	35	23.71	83	57	51	127	171
57	42.5	29.01	95	63	57	143	181
63	55	44.58	105	70	63	152	203

We're Australia's leading online supplier of lifting equipment and partner with some of the most trusted brands in the world to deliver quality products at competitive prices.