




TELESCOPIC SPREADER BEAM

The Telescopic Spreader Beam is designed for a variety heavy lifting applications. Designed to function as both a spreader bar in the 60°, 90° and 120° positions. The product is supplied certified to AS4991-2004 and includes a proof load test certificate and MPI welding report.

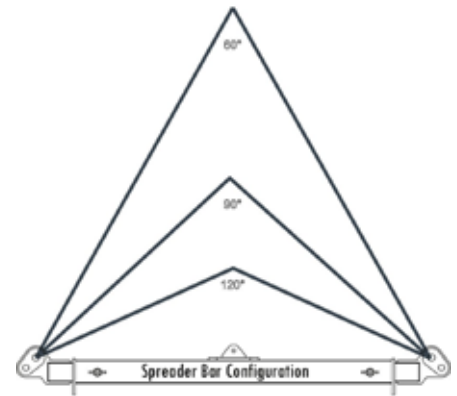

DESCRIPTION	SPAN (m)	MAX. CAPACITY (including sling angle)			ASSEMBLED WEIGHT	LIFTING LUGS (Grade S Safety Shackles)	
		60°	90°	120°		Top	Lower
1.5t x 3m	1.8 - 3.0	1.5	1.5	N/A	25kg	1.5t	1.5t
6t x 3m	2.0 - 3.0m	6.0	3.5	2.0	50kg	4.7t	4.7t
6t x 5m	3.0 - 5.0m	6.0	6.0	4.5	105kg	4.7t	4.7t
10t x 3.5m	2.3 - 3.5m	10.0	10.0	7.5	100kg	8.5t	6.5t
10t x 6m	4.0 - 6.0m	10.0	10.0	6.0	160kg	8.5t	6.5t
15t x 3.6m	2.25 - 3.69m	15.0	N/A	N/A	95kg	9.5t	9.5t
20t x 4m	2.65 - 4.00m	20.0	16.0	9.0	150kg	17.0t	12.0t
20t x 6m	4.0 - 6.0m	20.0	14.0	8.0	215kg	17.0t	12.0t
30t x 4m	2.8 - 4.0m	30.0	22.0	12.5	200kg	25.0t	17.0t
30t x 6m	4.0 - 6.0m	30.0	22.0	12.5	260kg	25.0t	17.0t
50t x 4m	2.8 - 4.0m	50.0	30.0	18.0	260kg	35.0t	25.0t
50t x 6m	4.0 - 6.0m	50.0	30.0	18.0	360kg	35.0t	25.0t
80t x 6m	4.0 - 6.0m	80.0	70.0	40.0	605kg	55.0t	55.0t

We're Australia's leading online supplier of lifting equipment and partner with some of the most trusted brands in the world to deliver quality products at competitive prices.