Technical Data Sheet






Flammable liquids safety cabinet - 100L storage capacity

APPLICATION

For the safe and secure indoor storage of Class 3 flammable liquids and combustible liquids.

FEATURES

- Double wall construction with 40mm thermal barrier
- Vent ports with integral flash arrestors fitted on each side
- Two self-closing doors with stainless steel, three point bullet self-latching system
- · Adjustable hydraulic door closure
- Flush mount handle and key lock
- Continuous piano hinges on doors deliver smooth closure
- One adjustable shelf plus fixed base shelf
- Internal spill containment bund with suspended perforated floor
- Durable UV stabilised thermosetting polyester powder coat finish
- Grounding connector enables earthing if required
- Adjustable screw-in feet for optional elevation
- Safety and warning signage applied in accordance with Australian Standards.

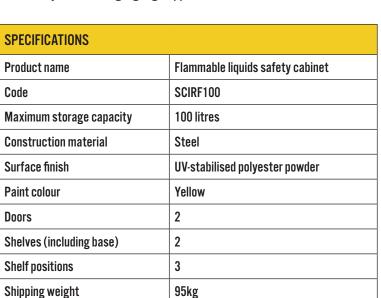

MANUFACTURED TO MEET THE REQUIREMENTS OF		
AS1940-2017	The storage and handling of flammable and combustible liquids	
AS1319-1994	Safety signs for the occupational environment	
ADG CODE 7.5 Australian Dangerous Goods Code 2017 Edition 7.5		
AS4506-2005	Metal finishing - Thermoset powder coatings	

NO SMOKING NO IGNITION SOURCES WITHIN 3M	FLAMMABLE LIQUID 3
	SORTING MAXIMUM CAPACITY 100 LITRES

DIMENSIONS (W x D x H)			
External dimensions	1110mm x 510mm x 800mm		
Internal dimensions	1010mm x 420mm x 550mm		
Shelf dimensions	998mm x 360mm x 30mm		



Class 3: Flammable Liquids

Flammable liquids are liquids, or mixtures of liquids, or liquids containing solids in solution or suspension (for example, paints, varnishes, lacquers, etc., but not including substances otherwise classified on account of their dangerous characteristics) which give off a flammable vapour at temperatures of not more than 60 °C, closed-cup test, or not more than 65.6 °C, open-cup test, normally referred to as the flash point.

Referenced from the Australian Dangerous Goods Code, 2017, Edition 7.5 $\,$