


MTA2HV11AC 300 lbs [135 kg]









THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT

800.548.7341 WPG.com


908 West Main - P.O. Box 368 Laurel, Montana 59044 U.S.A. 406.628.8231 (phone) 406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.

Rev. 1.1/01-19 Spec. Sheet **7-12**

WOOD'S POWR-GRIP® QUADRA-TILT 300 (2 PADS)

This Powr-Grip® vacuum lifter features our innovative Quadra-Tilt linkage, which automatically maintains the load position without using latches and reduces hazards of lifting loads from upright racks.

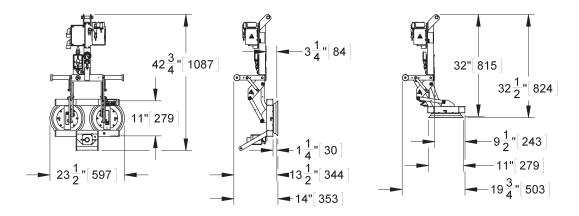

Maximum Load Capacity	300 lbs [135 kg]
Load Movement	Assisted Manual tilt, 90° between upright and flat
Standard Operating Power	120 volts AC, 60 hertz, 3 amps (240 volts AC, 50/60 hertz, 2 amps also available)
Standard Features	Vacuum gauge Vacuum line filter Twist-lock electrical plug Multiple handles for easy load positioning Blow-off for quick release
Available Options	G-force [™] hoist control Vacuum loss warning buzzer (93780AM) Voltage adaptation Alternative frame dimensions and capacities
Alternative Power Systems	DC power system (MTA2HV11DCS) Air (Venturi) power system (MTA2HV11AIR) (Specifications may not be as listed above. Please contact us for more information.)
Apply	1 second (approximately)
Release	2 seconds (approximately)
Lifter Weight	65 lbs [30 kg]
Standard Pad Spread	11" x 23½" [279 x 597 mm]
Number/ Size of Pads	2 / 10" [25 cm] diameter, lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0")
	(See www.WPG.com for more information.)

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.