



# EXPRESS COMBO TRAILER




## SPECIFICATIONS

Weight (empty)	5,240 lb
Weight (full)	11,500 lb
GVWR	14,000 lb
Tandem Slipper Spring Axles	7,000 lb Axles/8,000 lb Springs
Tires	235/80R16
Surge Brakes Actuator	20,000 lb, 2 5/16" ball or 3" Ring
Length	228"
Width	83"
Transport/Extended Height	110" (transport), 27' (extended)
Trailer Frame	7" Channel Iron with Recessed Lights
Water Tank	500 Gallons (black)
Diesel Tank	240 Gallons
Water System	Flojet 5 GPM, 110 V, 45 PSI
Pressure Tank	Two-Gallon Tank for Constant Pressure



[www.WylieSprayers.com](http://www.WylieSprayers.com)

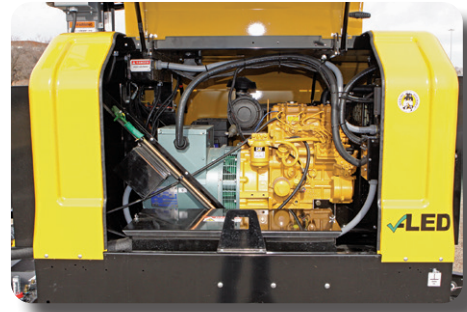

<b>ALLMAND MAXI-LITE II 20 kW V/ SERIES</b>	
<b>Engine</b>	Isuzu 4LE2T, Tier 4 Final, 40.2 hp
<b>Generator</b>	20 kW single-phase 120/240V generator
<b>Starting</b>	12V electric; pre-heat cold starting system
<b>Lighting</b>	4-320 watt LED fixtures
<b>Electrical</b>	Alternator (generator): 60 Hz, (ML 20--15kW, 1-phase)
	Circuits: hard-wired electrical
	1-60 AMP - main disconnect
	2-20 AMP/120V Duplex 3-30 AMP/240V/4-wire Twist Lock 2-50 AMP/240V/RV Outlet



EXP-500/COMBO-S

