

thank you

for choosing our products for your audio needs. We've carefully designed it with our client's best interests in mind, aiming to provide nothing but the finest. Our aspiration is that it matches your expectations.


Your feedback is invaluable to us. Feel free to share your experience with our products & services by leaving a review on our website.



HEY!
VISIT OUR WEBSITE


Feel free to reach out if you have any questions or concerns. We're happy to help!

CS75B Installation Manual

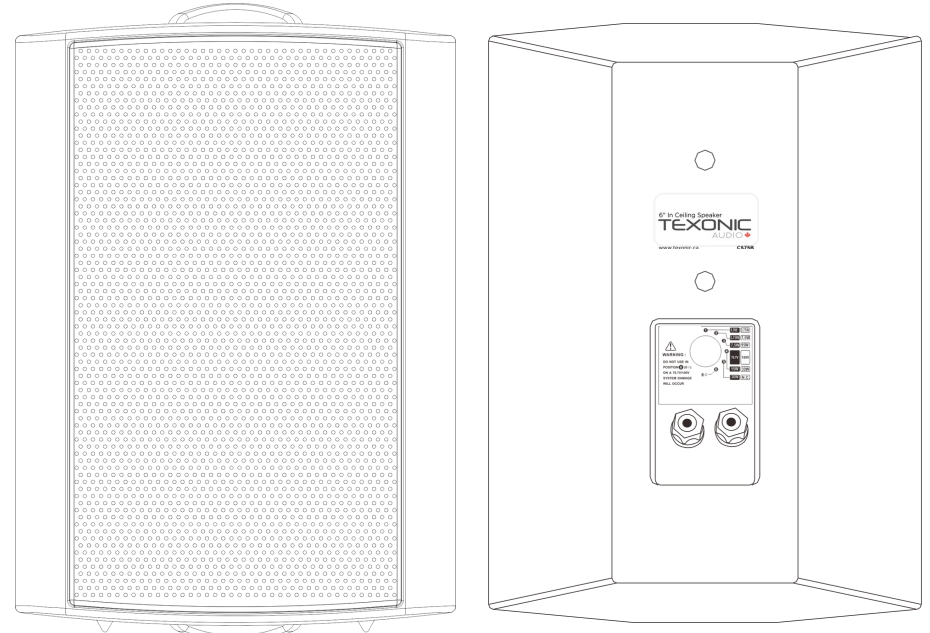

5" On Wall Speaker - Pair
TEXONIC
AUDIO 

Dimensions

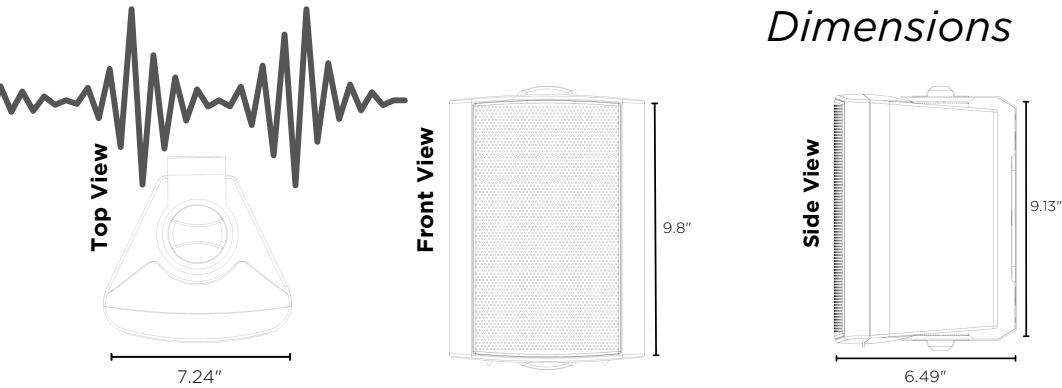


Specifications

Sensitivity	89±3dB	DC Impedance	7.2Ω
Frequency Response	100Hz-20KHz	Component(L.Speaker)	5" PP Woofer
Sound Pressure Level	101dB at 100V 15W	Component(H.Speaker)	1.5" Silk
Rated Power	30W	Voice Coil Size	ASV 25.9 *Φ0.17*2T
Power Taps	3.75W/7.5W/15W/30W&8Ω	Grill	Powder Coated Iron Mesh
Line input	70V/100V	Unit Weight	5.59lbs (2.54kgs)

Installation


Understand your installation surfaces:

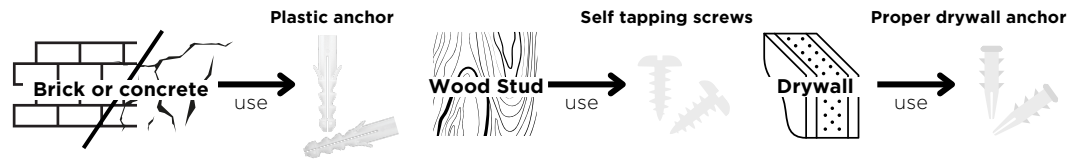

STEP 1


Detach the mounting bracket from the speaker.

Next, use the mounting bracket as a point of reference to indicate where the screws should be positioned.

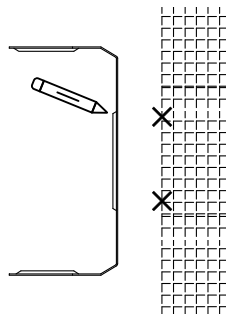


STEP 2

Drill holes according to your anchors size in the marked areas, there should be a 5.66"(144mm) distance between the two holes as a reference point.

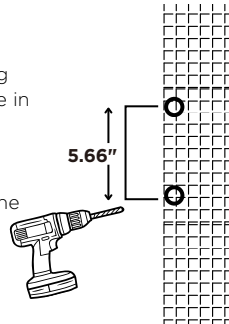


STEP 3

Carefully insert anchors after drilling.

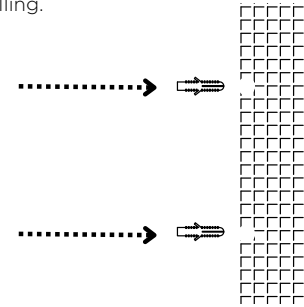


STEP 4

Secure the mounting bracket to the surface using screws to the anchor.

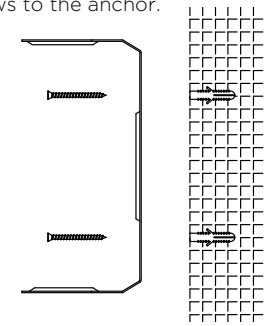


STEP 5

Connect audio cables to the speaker's rear before mounting it.

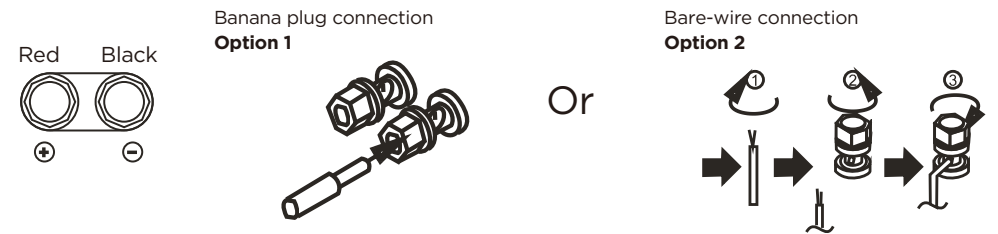


STEP 6

Secure the mounting bracket to the speaker using the two screw-type bolts.

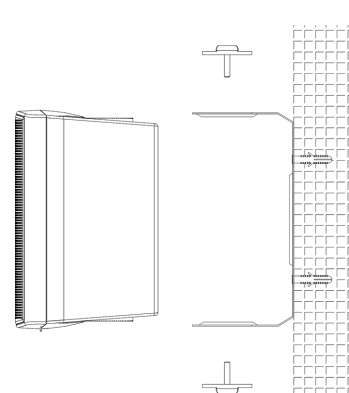

STEP 7

All Done! Adjust the speaker angle according to your preferences. Now enjoy the audio setup!

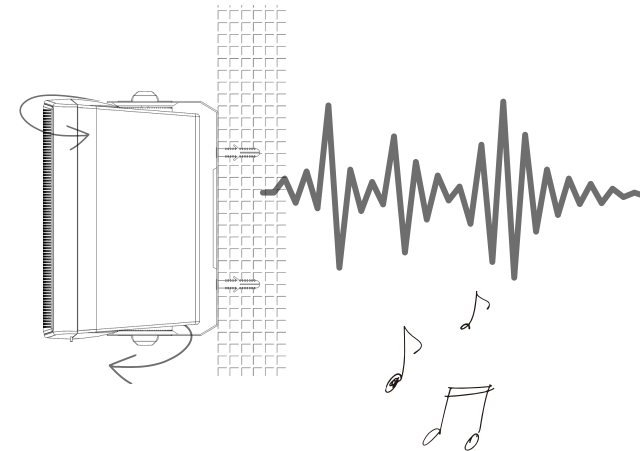

***Please note this unit can be installed vertically or horizontally