



ROCKHARD POLY CLEAR POLYASPARTIC KIT

2 GAL KIT

DESCRIPTION

Rockhard POLY is a two-component, 83% solids, VOC compliant, low odor, aliphatic polyaspartic polyurea that was developed for UV stable floor topcoats. It provides outstanding appearance, superior chemical, UV, and solvent resistance. It exhibits excellent physical properties. This system has been approved by the Canadian Food Inspection Agency (CFIA). Rockhard POLY also meets FDA and USDA requirements. Rockhard POLY UV stable polyaspartic top coat hold up to most battery acid spills.


*Consult floor coating installer for warranty information.

FEATURES & BENEFITS

- 100% Solid, Self Leveling & VOC Compliant.
- Surfaces Must be dry and free of contaminants.
- Excellent adhesive properties, bonds to substrate.
- Low VOC allows for interior application without any harmful odors.
- Non-toxic, environmentally friendly & resistant to harsh chemicals.
- Provides dense, easy to clean, bacteria & moisture resistant surface.
- May apply several layers on top of itself after preparation is completed.

PRODUCT CODE

ROCKHARDPOLY-KIT

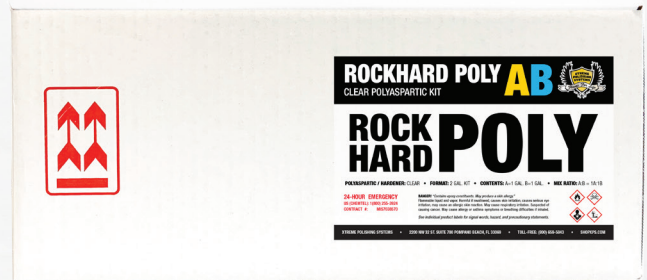

SPECS

- Format: 2 Gallon Kit
- Part A: 1 gal (3.8 L)
- Part B: 1 gal (3.8 L)
- Mix Ratio: Resin (A) / Hardener (B) = 2/1

- Solids: 100%
- Color: Clear
- Finish: Gloss
- Shelf Life: 12 months



Curing Time	41°F	68°F	86°F
Set-to-touch	10 Hours	5 Hours	3 Hours
Dry-through	32 Hours	16 Hours	10 Hours
Over-coat (Max)	48 Hours	36 Hours	18 Hours
Full Cure	9 Days	4 Days	3 Days
Pot Life	60 Minutes	45 Minutes	10 Minutes

Wet Film Thickness Mils	Sq. Ft. Per Coat/Gallon
Primer	105-200 Sq. Ft. Per Gallon
Solid	50-100 Sq. Ft. Per Gallon
Base for Chip / Quartz	130 Sq. Ft. Per Gallon
Metallic	50 Sq. Ft. Per Gallon

AFOREMENTIONED POT LIFE AND FOLLOW-UP COATING TIME HAVE BEEN MEASURED UNDER LABORATORY CONDITIONS AND MAY VARY DEPENDING ON CONSTRUCTION SITE.

APPLICATION TOOLS FREQUENTLY BOUGHT TOGETHER

DESCRIPTION

- 24" Notch Squeegee
- 24" Magic Squeegee Trowel
- 18" Big Ben brush: Roller Frame
- 18" Painters Solution: Roller Cover
- Epoxy Coatings Spiked Shoes
- Color Additives: Powder Pigments (Metallic)
- Color Additives: Liquid Pigments (Solid or Metallic)
- Color Additives: Flakes (Mica Chips)
- Color Additives: Flakes (Vinyl Chips)
- Color Additives: Glitter (Fine or chunky)

USAGE

- Reusable
- Reusable
- Reusable
- Consumable
- Reusable
- Consumable
- Consumable
- Consumable
- Consumable
- Consumable

PRODUCT CODE

- WB-R7153
- XPS-24TROWEL
- WB-BR045
- WB-R575-18
- SHOES-EPOXYPRO
- XPS+Color
- 4CB+Color or CM+Color
- XPS-MICA+Color
- XPS-SIGNATURE+Color
- GMWMC+Color



Cut Sheets are subject to change without notice. For Latest version, visit www.shopxps.com.

2200 NW 32 St. Suite 700 Pompano Beach, FL 33069

| 877-958-5264

| info@xtremepolishingsystems.com

| www.shopxps.com

