



2200 NW 32nd Street #700
 Pompano Beach, FL 33069
 (800) 659-5843

www.xtremepolishingsystems.com


Color Flakes, commonly referred to as FLAKE, chips or fleck, are composed of water-based resin materials, organic minerals, additives, and various pigments. This unique product is integrally pigmented, brilliantly colored, random in shape, sized within a standardized range, and can be custom blended to achieve optimal appearance and texture qualities with a resinous flooring or wall-coating system.

ColorFlakes resinous performance flooring materials are available in over 150 color-styles and six standardized sizes that can be mixed and matched to custom design your floor and enhance any décor.

PERFORMANCE SPECIFICATIONS

Color (AE < 0.5)	Spectrophotometer (ASTM E1866)	Pass
Dry Film Thickness Gauge	Micrometer (ASTM D1005)	~5 mils
Shape	Visual Evaluation (ASTM D4086)	Random
Odor	Olfactory (ASTM D1296)	Odorless
Surface Texture	Leveling Draw-Down (ASTM D4062)	Smooth
Metamerism	Spectrophotometer (ASTM E1866)	Nonmetameric
Sheen	60° Gloss Meter (ASTM D523)	< 15 units
Dry Film Flexibility	Mandrel Bend Test (ASTM F137)	Pass
Opacity > 98%	Visual Evaluation (ASTM D6762)	Pass
Size Distribution	Normal Sieve Analysis (ASTM C136)	Pass

TYPICAL FLAKE SYSTEM

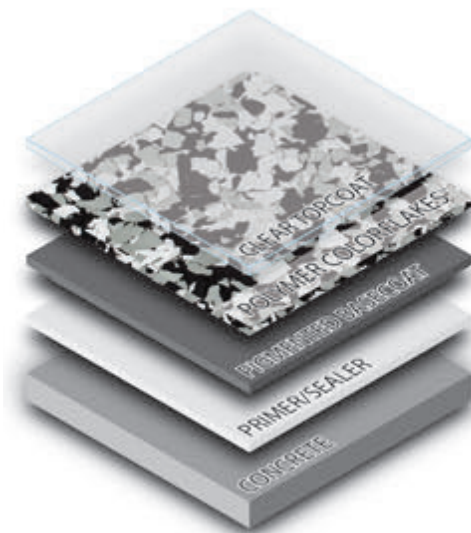

For best results, a clear topcoat is recommended to fully encapsulate the FLAKE and provide a durable wearing surface.

PRODUCT LIMITATIONS

- ColorFlakes™ are random in shape to provide optimal aesthetics.
- The colorfast pigments used in ColorFlakes™ are UV stable, however, the specifications for the UV stability and environmental durability of your coating system will determine outdoor suitability.
- Due to inherent product characteristics, a small amount of finer particles will be present within each box.

STORAGE

Store ColorFlakes in an air tight poly-bag in a dry environment at room temperature to avoid moisture, humidity, and product damage.

SYSTEM ADVANTAGES

- Custom blending and color matching
- FLAKE texture provides anti-slip qualities
- Over 150 color styles in stock
- Non-flammable
- Water-based chemistry
- Optimal flexibility & strength
- Colorfast, UV stable pigments
- Easy and fast application
- Custom blend matching expertise
- Lab-tested resin compatibility
- Custom packaging & label options
- No minimum order quantities
- Diligent quality control program

RESIN SYSTEM COMPATIBILITY

Lab-tested resin system compatibility (Pass/Fail)	
Epoxies	Pass
Methyl Methacrylates (MMA)	Pass
Polyaspartics	Pass
Polyureas	Pass
Polyurethanes	Pass
Solvent-based Coatings	Pass
Water-based Coatings	Pass
Unkown resin compatibility testing recommended prior to use.	

APPLICATION SPECIFICATIONS

Typical FLAKE flooring application coverage rates:		
Flake Size	Full Coverage	Partial Coverage
Original (1")	8 - 10 SF/LB	25 - 250 SF/LB
1/2"	7 - 9 SF/LB	25 - 250 SF/LB
1/4"	5 - 7 SF/LB	25 - 250 SF/LB
1/8"	4 - 6 SF/LB	25 - 250 SF/LB
1/16"	3 - 5 SF/LB	25 - 250 SF/LB
1/32"	2 - 4 SF/LB	25 - 250 SF/LB
Coverage rates vary depending on application techniques.		

DISCLAIMER: The information set forth in this Product Data Sheet represents typical properties of the product described; the information and the typical values are not specifications. Torginol, Inc. makes no representation or warranty concerning the products, expressed or implied, by this Product Data Sheet.