


- **Power Source:**
Advanced Lithium Technology 992Wh (3.2 V, 15.5AH).
- **High Output:**
2400 Peak watts -1200 running watts.
- **Data Center:**
Reports remaining time on charge, input/output status, current power consumption.
- **Convenient Charging Options:**
120V household, automotive, generator and solar charging inputs.
- **Durable Exterior:**
Heavy duty, automotive grade casing.
- **Whisper Operation:**
Zero sound emissions -ideal for home, camping, tailgating & RV.
- **Compact Design:**
Easy to transport with integrated handle.
- **Lightweight:**
Only 31 lbs for complete portability.



GS1000i

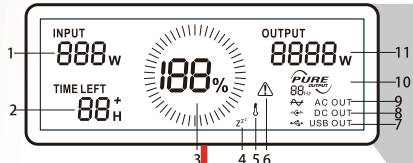


| | | | |
|---------|--|----------------|---|
| 888w | 1-Recharging Power Indicator | 88% | 2-Time Left Indicator (Charge Or Discharge) |
| 8888w | 3-Power Display(%) | Z ^z | 4-Save-Energy Indicator |
| 88h | 5-Low Temperature and High Temperature Warning Indicator. The GS350i should be used in temperatures between -10-40°C (-14-104°F) | ! | 6-Over Load Warning Indicator |
| AC OUT | 7-USB Output Indicator | -G+ | 8-DC Output Indicator |
| DC OUT | 9-AC Output Indicator | PURE 88 | 10-Pure Sine Wave Indicator |
| USB OUT | 11-Discharge Power Indicator | | |

**DC Outlet: 10 A, 12VDC
Automotive Outlet**




Integrated Handle



Integrated LED Spotlight




**Wall Charger, car charger,
solar charger
(100V-120V/1.8A, 200W)**

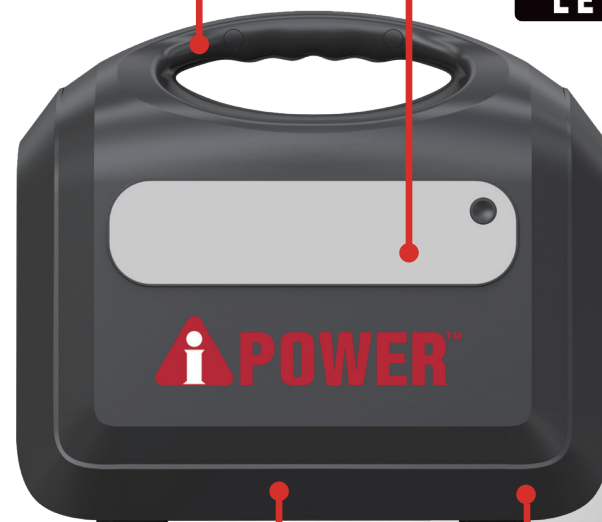


**DC Outputs:
USB QC 3.0
(5V/3.6A, 9V/2A, 12V/1.5A)**



**DC Outputs:
USB type C**



Silent Operation




**Lightweight
31 lbs**





Input / Output Options:

GS1000i

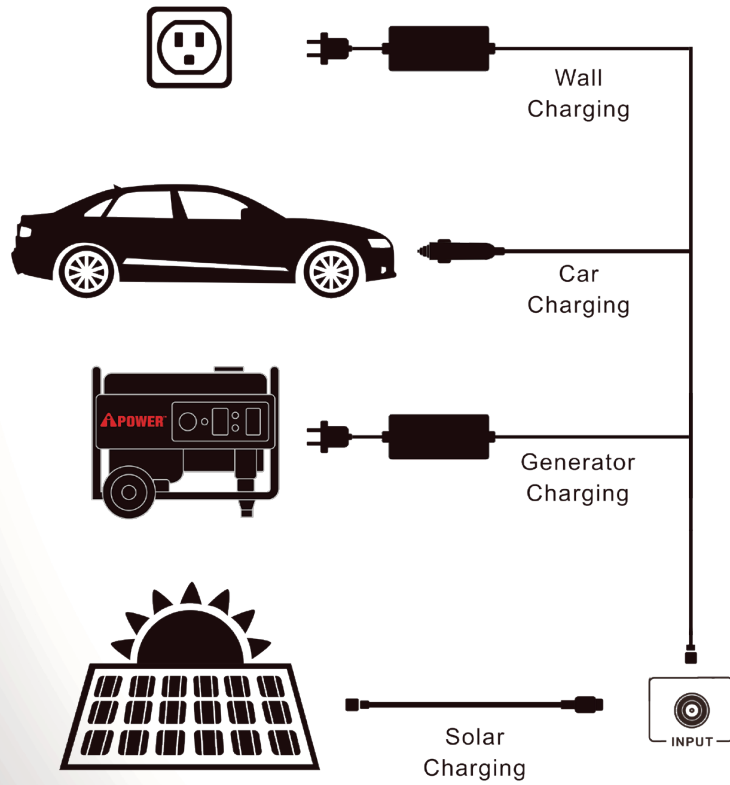


Input (DC)

Output (DC)

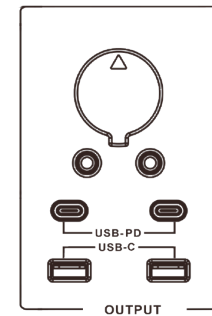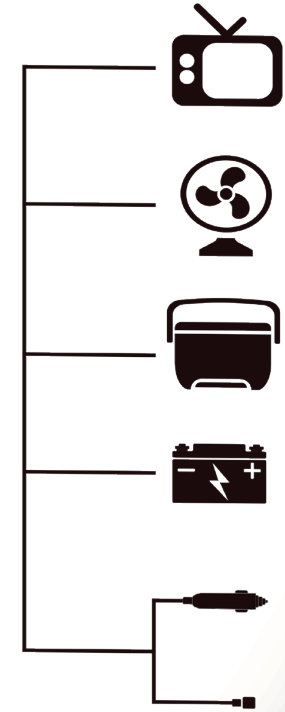


Output (DC)

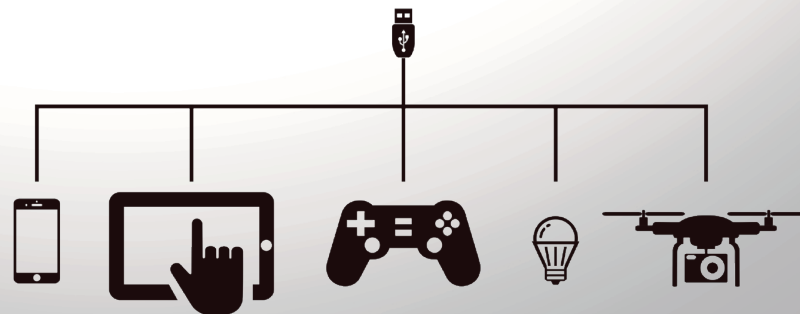


| Model Number | GS1000i |
|---------------------------------|---|
| Certifications | CE, FCC, UL |
| Capacity (Wh) | 992Wh |
| Running Watts | 1200W |
| Peak Watts | 2400W |
| AC Output Voltage | 110-120V |
| AC Frequency | 60Hz |
| Sine Wave | Pure |
| Lifecycle | 3500 Cycles to 80% |
| Estimated Charging Time (Wall) | 6 Hours |
| Battery Shelf-Life | 6 months |
| Operating Temperature | -10 °C to 45 °C |
| Battery Chemistry | LiFePO4 |
| Battery Cell Voltage - Amp Hour | 3.2V, 15.5AH |
| AC Output | 3*120V/60HZ |
| DC Output | 1*Cigarette receptacle (12V/10A) 2*USB type C 2*USB QC 3.0 (5V/3.6A, 9V/2A, 12V/1.5A) |
| DC Input | Wall Charger, car charger, solar charger (100V-120V/1.8A, 200W) |
| Output Temperature | -10 °C to 45 °C |
| LED Flashlight | No |
| Wheel Kit | No |
| Accessories | AC cable with 200W AC Adapter, Car Charger to DC7909, User Manual, Warranty card |
| Estimated Weight | 31 lbs |
| Carton Dimension | 450*320*400mm(17.7*12.6*15.75in) |
| Qty Load (40HQ) with pallet | 672 |
| Warranty | Two Year |

GS1000i

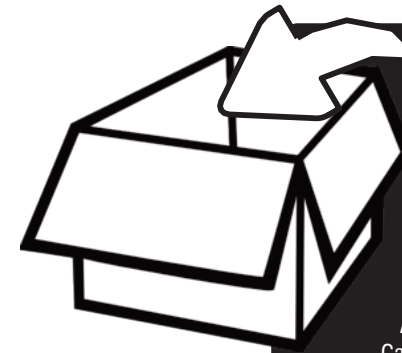


INCLUDED

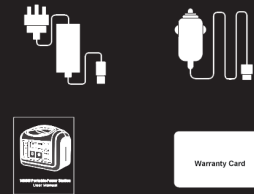

AC Charging Cable with Adapter 200W
Car Charger to DC7909 Cable, User Manual
Warranty Card

What Will It Run?

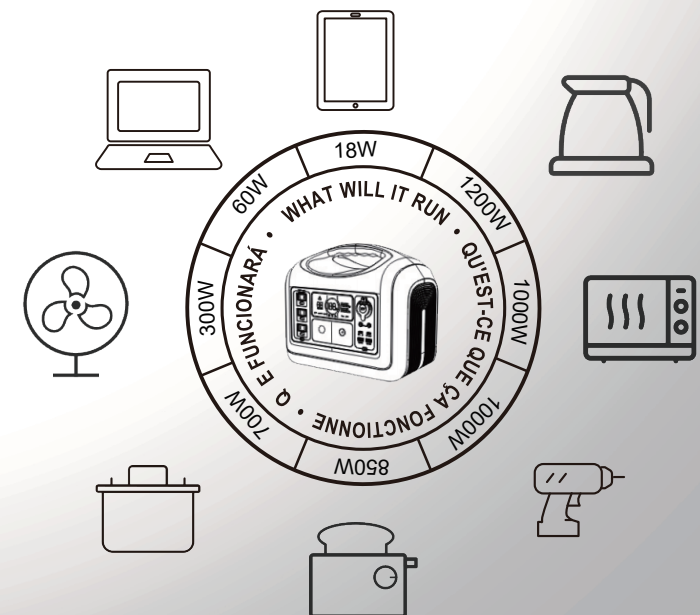

iPOWER

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

LEARN MORE HERE

