


POWER™

GXS4300i 4300 Watt Inverter Generator


- **Powered By:** 149cc OHV high performance 4 cycle engine
- **High Output:** 4,300 starting watts - 3,450 running watts on gasoline
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Adjusts RPM based on demand, saving fuel
- **Mobility Kit:** Factory installed telescopic handle and wheels - no assembly required
- **LED Equipped:** Built in LED  control panel light
- **Quiet Operation:** Ultra Quiet - ideal for home, camping, tailgating & RV
- **Compact Design:** Lightweight and easy to transport with integrated handle
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels




ULTRA - LIGHTWEIGHT INVERTER GENERATOR



 DIGITAL INVERTER
TECHNOLOGY



GXS4300i


1.6-Gal Tank with
Up To 7.5 Hour Runtime (Gas)



Integrated Top
Handle



Low
Idle



Quiet Tone
Muffler



Integrated
Outlet Covers



149cc, OHV,
4 Cycle Engine



Total Harmonic
Distortion < 3% THD



Telescopic
Handle



Flat
Free Wheel





ULTRA - LIGHTWEIGHT INVERTER GENERATOR


GXS4300i

Data Center Displays;
Voltage, Frequency, Hours,
Power, Fuel Bar, Output
Ready/Overload/Low Oil Indicators
Low Idle and Reset Buttons


CO Sensor:
Auto Shutdown

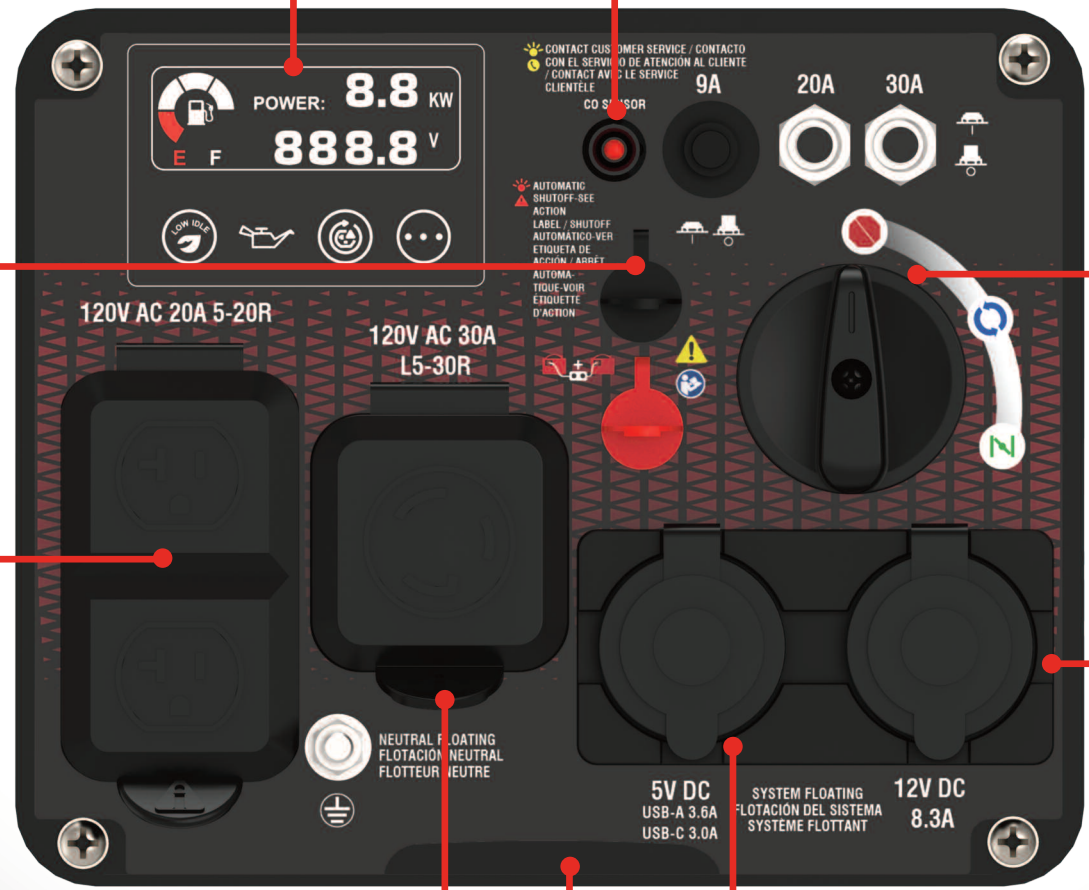


Parallel
Capability*



AC Outlet: 5-20R
Duplex 20A, 120V



Recoil
Start



EZ Start
System



DC Outlet:
8.3A, 12VDC Automotive Outlet



L5-30R
30A, 120VAC



DC Outlet:
(2) 5VDC USB



Integrated LED
Illumination



*Requires PK6000 Parallel Kit Sold Separately

GXS4300i

GXS4300i	
Starting/Running Watts (Gas)	4300/3450W
Starting/Running Watts (Propane)	NA
Starting/Running Watts (NG)	NA
Certifications	EPA - CARB
CO Monitor	Yes
AC Voltage	120V
Rated Speed/Frequency	3400-4400rpm/60Hz
Total Harmonic Distortion (THD)	Standard
Grounding System	Neutral Floating
Noise Level (dB)	As Low As 52
Engine Type	Single Cylinder 149cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Parallel Capable	Yes - Requires PK6000 Parallel Kit Sold Separately
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 480ml
Alternator Type	Digital Permanent Magnet
Tank (Gas)	1.6 Gal
Runtime @25% Load (Gas)	Up to 7.5 Hour
Mobility Kit	Yes - Built-In & Telescopic
Wheel	Yes - Factory Assembled
AC Outlets	2x5-20R Duplex (20A, 120V)/L5-30R (30A, 120V)
DC Outlets	2xUSB (5V, Type-A/Type-C), 12V 8.3A Automotive Style Outlet
Integrated LED Illumination	Yes
Data Center	Voltage, Frequency, Hours, Power, Fuel Bar, Output Ready/Overload/Low Oil indicators, Low Idle and Reset Buttons
Included	Oil, Funnel, 30A RV Adaptor, 12V DC Charging Cables, Tool Kit, Manual, Quick Start Guide
Warranty (Residential)	3 Year
Carton LxWxH	21.8 x 14.4 x 20.3 in / 55.4 x 36.6 x 51.6 cm
Unit Weight	52.9 lbs / 23.9 kg
Shipping Weight	62.4 lbs / 28.3 kg
UPC	850016881601



Integrated LED Light



FULL PARALLEL INTEGRATION*

**DOUBLES YOUR POWER
ONCE CONNECTED**

Parallel cables included.
Read manual for full instructions.

NOTE: Maximum output is obtained from the L5-30 twist lock receptacle

**Requires second GXS4300i / GXS4300iD Series inverter and PK6000 Parallel Kit - each sold separately.*



PK6000 Parallel Kit Required - Sold Separately

iPOWER

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240



Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

