

- **Powerful:** 223cc OHV high performance 4 cycle engine
- **High Output:** 3,800 starting watts - 3,500 running watts
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Extended run time of 12 hrs. at 25% load
- **Quiet Operation:** Ideal for home, camping, tailgating & RV
- **Parallel Equipped:** Complete with parallel ports for double the power output when linked together
- **Compact Design:** Lightweight for easy to transport with telescoping handle & wheels

 DIGITAL INVERTER TECHNOLOGY



SUA3800i

2.6-Gal Tank with
12 Hour Runtime



Telescopic
Handle



Quiet Tone
Muffler



Integrated
Outlet Covers



223cc Recoil Start
Engine



Total Harmonic
Distortion < 3% THD




6" Flat Free
Wheel



SEE 10W-30
CAPACITY: 0.6 L • 0.63 Qt • 20.2 Oz
Your unit has been shipped without engine oil. Add oil prior to starting or damage will occur. Engine will not start or will shut off if low oil is detected.

SUA3800i

Low Idle





DC Outlet: 8.3A, 12VDC Automotive Outlet



DC Outlet: 1.5A, 5VDC USB



Fully Integrated Parallel Capability

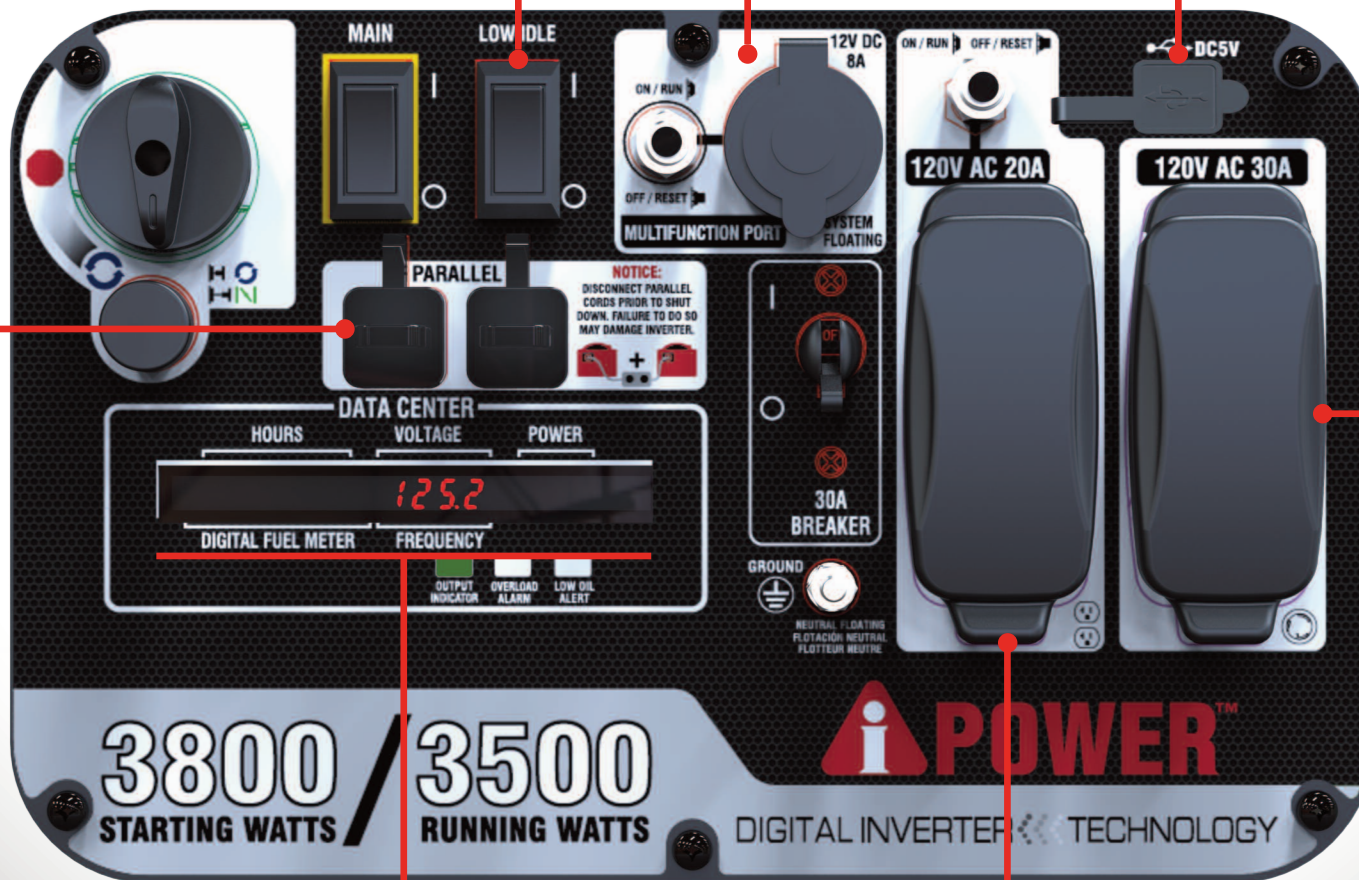


L5-30R 30A, 120V




Data Center Displays;
Hours, Voltage, Power
Fuel Meter, Frequency
Output Ready/Overload/Low Oil
LED Indicators

AC Outlet: 5-20R Duplex 20A, 120V



SUA3800i

Model Number	SUA3800i
Starting/Running Watts	3800/3500W
Certifications	EPA - CARB
AC Voltage	120V
Rated Speed/Frequency	Variable/60Hz
Total Harmonic Distortion (THD)	< 3%
Grounding System	Neutral Floating
Noise Level (dB)	63
Engine Type	Single Cylinder 223cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shtdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 550ml
Low Idle	Yes
Alternator Type	Permanent Magnet - Inverter
Tank	2.6 Gal
Runtime @25% Load	12.0 Hour
Handle	Telescopic - Integrated Top Handles
Wheel	Flat Free 6.0"
AC Outlets	1x5-20R Duplex (20A, 120V) - 1xL5-30R (30A, 120V)
DC Outlets	1x Automotive Style (8.3A, 12V) - 1xUSB (1.5A, 5V)
Parallel Capability	Yes
Data Center	Yes
Accessories	Oil - Funnel - 12VDC Battery Charging Cable - Tool Kit 30A RV Adaptor - Manual - Quick Start Guide
Warranty (Resedential)	3 year
Carton LxWxH	25.6x21.7x23 inch
Unit Weight	121 lbs
Shipping Weight	132 lbs
UPC	851217006916

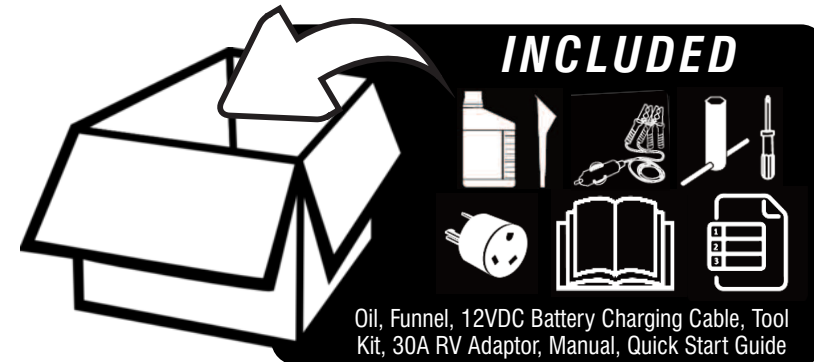

INCLUDED

Oil, Funnel, 12VDC Battery Charging Cable, Tool Kit, 30A RV Adaptor, Manual, Quick Start Guide

FULL PARALLEL INTEGRATION*




IPBS8000 Parallel Kit Required - Sold Separately

DOUBLES YOUR POWER ONCE CONNECTED

Read manual for full instructions.

NOTE: Maximum output is obtained from the 14-50R receptacle

** Requires second SUA3800i and IPBS8000 Parallel Kit - each sold separately.*

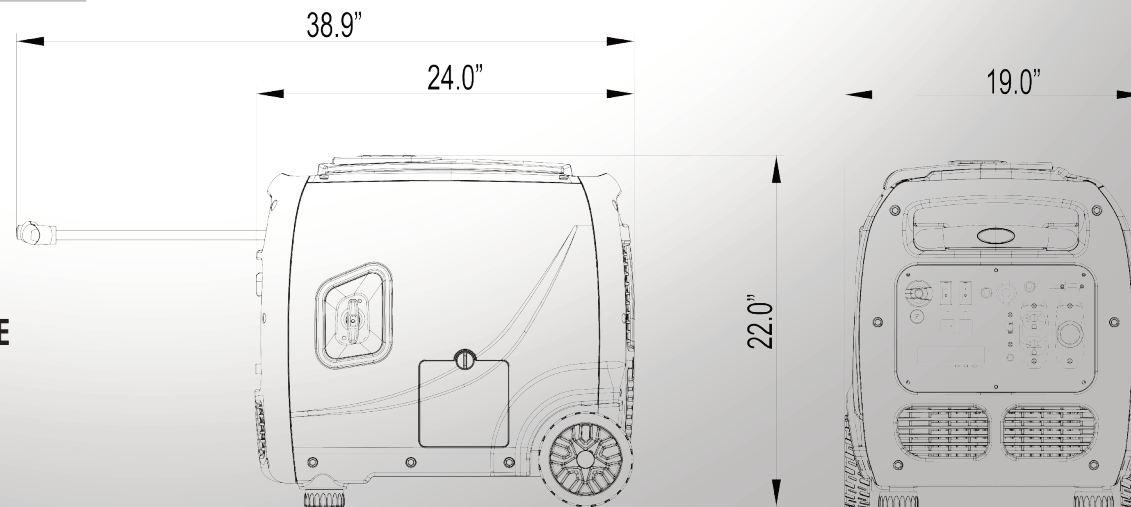

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

LEARN MORE HERE

