



# HYDROTAP G5 C CLASSIC PLUS BRUSHED GOLD



CHILLED

FILTERED

## Order Code H55788Z07AU

Zip HydroTap Classic Plus Chilled Filtered water features simple, intuitive controls including continuous flow to fill bottles, and antimicrobial protection impregnated within the new Classic Plus touch-pad for enhanced hygiene. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code H55788Z07AU

Capacity Residential

**Tap** Zip HydroTap CLASSIC PLUS Tap (Brushed Gold)

**Water Pressure** Min 170kPa - Max 700kPa

**Water Connection** 1/2" BSP (G1/2)

**Water Supply Requirements** Cold

**Water Valves** Integrated 500kPa Pressure limiting valve and Dual Check Valve

**Power Rating** 0.17kW 220-240V 50Hz

**Power Supply** 1 x 10 Amp socket outlet

**Dimensions** W280mm x D406mm x H333mm











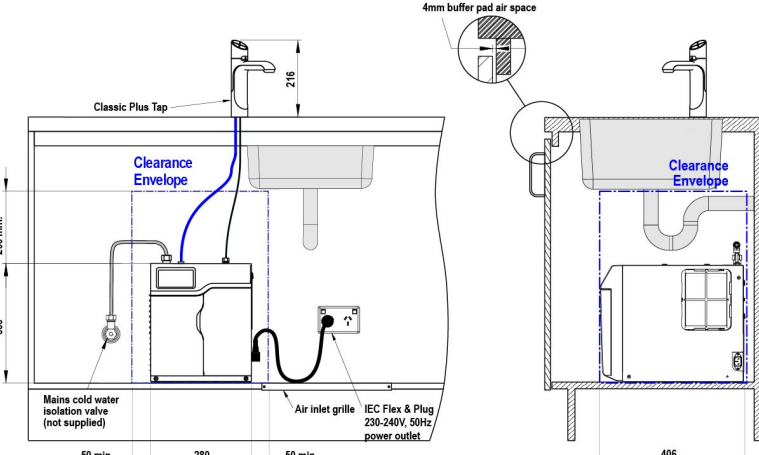
**Product Approvals** WaterMark, RCM, ARC

## Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

## Installation Detail

EKL2 HydroTap G5 v1.00 02.21

Ventilation requirements <small>Contact your local service provider if ventilation is not suitable</small>	HydroTap Tap options	Font options	
<p><b>Clearance envelope</b> Position the Tap and the Command Centre as close together as possible.</p> 	<p><b>HydroTap Tap options</b></p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Classic Plus</p>  </div> <div style="text-align: center;"> <p>Elite Plus</p>  </div> </div>	<p><b>Font options</b></p> <p><b>Raised Font with 135mm Extension</b></p>  <p><b>Font with 135mm Extension</b></p>  <p><b>Cutting detail</b></p> 	<p><b>Cutting detail</b></p> 
<p><b>Air outlet louvre (if required)</b> Cut-out in door/wall, towards the top of the cabinet</p>  <p><b>Air inlet cut-out (required)</b> Cut-out in cabinet floor</p> 	<p><b>Tap Positioning</b> Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap on a Font (available as an accessory).</p> <p>35mm hole for HydroTap Tap</p> 		
<p><b>4mm buffer pad air space</b></p>  <p><b>HydroTap G5 C Home</b> shown with "Classic Plus" Tap</p> <p>SCALE 1:5 ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.</p>			