


HYDROTAP G5 BCSHA CELSIUS ALL-IN-ONE ARC BRUSHED ROSE GOLD

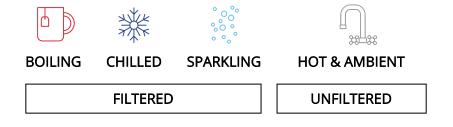

Order Code H57783Z05AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

Manufacturing Code	H57783Z05AU
Capacity	Residential

Тар	Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Brushed Rose Gold)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.8kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W339mm x D460mm x H333mm

Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 6.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.

2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.

3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.

4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.

5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.

6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Ventilation requirements Contact your local service provider if venti HydroTap Tap options đ tion is not se Celsius All-in-One Arc Tap Clearance envelope Classic Plus All-in-One Tap Classic All-in-One Tap Position the Tap and the Comm as close together as possible. d Centre 314 226 na & Chilled Outlet 200 220 Hot & Cold Outlet 278 278 254 254 211 211 110 193 193 333 Ø 52 440 50 -258 7 34 Air outlet lo re (if re 234 **8** 285 51 1 Air inlet cut-out (326 Ø 50 Tap Positioning Mains hot water supply installation Position the Tap to dispense into the allowing clearance for a cup or team nto the s r pad air Ø50mm hole for Tap o 40 Sink T Celsius All-in-One Arc Tap 50mm hole in sink/benchtor BLUE marked braided hose for All-in-One tap Clearance Clea RED marked braided hos Braided hose to HydroTap Command Centr MAINS inlet to mixer tag water isolation CO₂ gas cylinder 200 min. (not supplied) water isolation valve (not suppl ied) (AHBB 333 HydroTap G5 ND-01 IEC Flex & Plug **BCS Home** Air inlet grille 230-240V, 50H outlet 460 50 min. 339 50 min shown with Celsius All-in-One Arc Tap SCALE 1:5 S IN MM UNLESS OTHERV SE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

Installation Detail

