



# HYDROTAP G5 CS CUBE PLUS BRUSHED GOLD



CHILLED




SPARKLING

FILTERED

## Order Code H5C787Z07AU

Zip HydroTap Design Range Chilled, Sparkling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

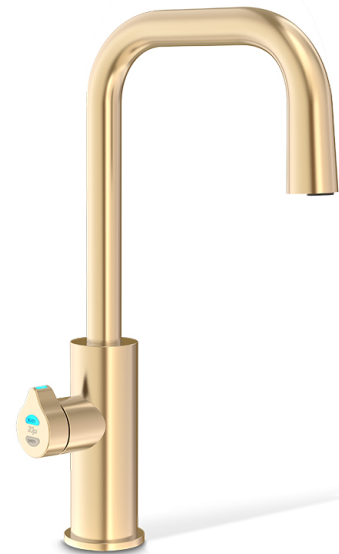

Manufacturing Code H5C787Z07AU

Capacity Residential

|                           |  |
|---------------------------|--|
| Tap                       | Zip HydroTap Design Range CUBE Plus Tap (Brushed Gold)                         |
| Water Pressure            | Min 250kPa - Max 700kPa  |
| Water Connection          | 1/2" BSP (G1/2)  |
| Water Supply Requirements | Cold   |
| Water Valves              | Integrated 500kPa Pressure limiting valve and Dual Check Valve                 |
| Power Rating              | 0.18kW 220-240V 50Hz   |
| Power Supply              | 1 x 10 Amp socket outlet   |
| Dimensions                | W280mm x D406mm x H333mm   |
| Product Approvals         | WaterMark, RCM, ARC  |
| Warranty                  | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

# Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

## Installation Detail

BKL2 HydroTap G5 v1.03 03.23 CS Home

**Ventilation requirements** Contact your local service provider if ventilation is not suitable

**Clearance envelope**  
Position the Tap and the Command Centre as close together as possible.

**HydroTap Tap options**

**HydroTap Arc Tap**

**HydroTap Cube Tap**

**Standalone Font with Arc Tap**

**Cutting detail**  
for HydroTap Arc/Cube

**Tap Positioning**  
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount on a Font (available as an accessory).

Ø35mm hole for HydroTap Tap

Air outlet louvre (if required)  
Cut-out in door/wall, towards the top of the cabinet

Air inlet cut-out (required)  
Cut-out in cabinet floor

4mm buffer pad air space

**Tap Positioning** (continued)

**HydroTap G5  
CS Home**

shown with HydroTap Arc

SCALE 1:5  
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.