

Oslo

OS127BTW (Pan: OS127BTW / Seat: V11273ST / Flush Plate - Refer code below when ordering)
OS127RDPPCR, OS127SQPPCR, OS127RDPPBK, OS127SQPPBK

Wall Faced Toilet Suite

All dimensions in mm



OS127RDPPCR



OS127SQPPCR





OS127RDPPBK



OS127SQPPBK



*Specify flush plate code when ordering.

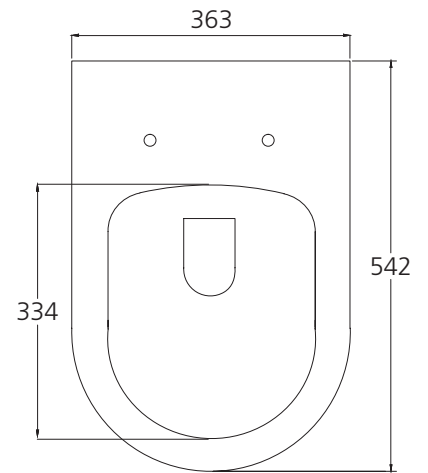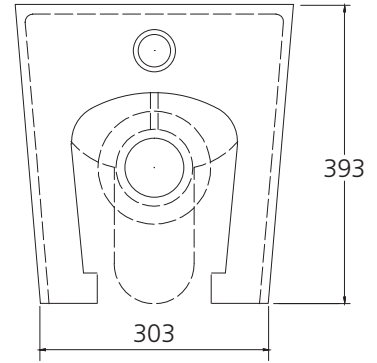

Specifications /

WELs Rating	4 star, 3.5L avg flush volume (4.5/3L)
Pan	Rimless/Easy-clean design
Traps	Universal (S or P-trap)
Set outs	S-trap set out 55mm - 110mm as standard. P-trap set out 185mm floor to centre of outlet. Optional S-trap set out 150mm - 180mm (SPB0201).
Cistern	Geberit Sigma8 Concealed Cistern (Dual flush valve 4.5L/3L)
Fixing	The toilet is fixed with a Geberit concealed water tank in wall
Seat	Soft close and quick release toilet seat is provided as standard. Compression moulded toilet seat, fitted with buffers and metal hinges.
Colour	White (with chrome or black flush plate)
Installation	The installation of the toilet suite shall be in accordance with the normal minimum drain line grade requirements in AS/NZS 3500.2.
Materials	Vitreous china
Weight	Pan is 32.9kg
Parts list	UF toilet seat, Geberit double flushing valve, standard pipe
Warranty	20 years vitreous china cistern & pan replacement of product; 5 years replacement seat; 2 years valves & fittings; 1 year seals & labour (refer to Service & Warranty page for details)
Maintenance and care instructions	All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

Oslo


SET OUT DRAWING

All dimensions in mm

OS127BTW (Pan: OS127BTW / Seat: V11273ST / Flush Plate - Refer code below when ordering)

OS127RDPPCR, OS127SQPPCR, OS127RDPPBK, OS127SQPPBK

Wall Faced Toilet Suite

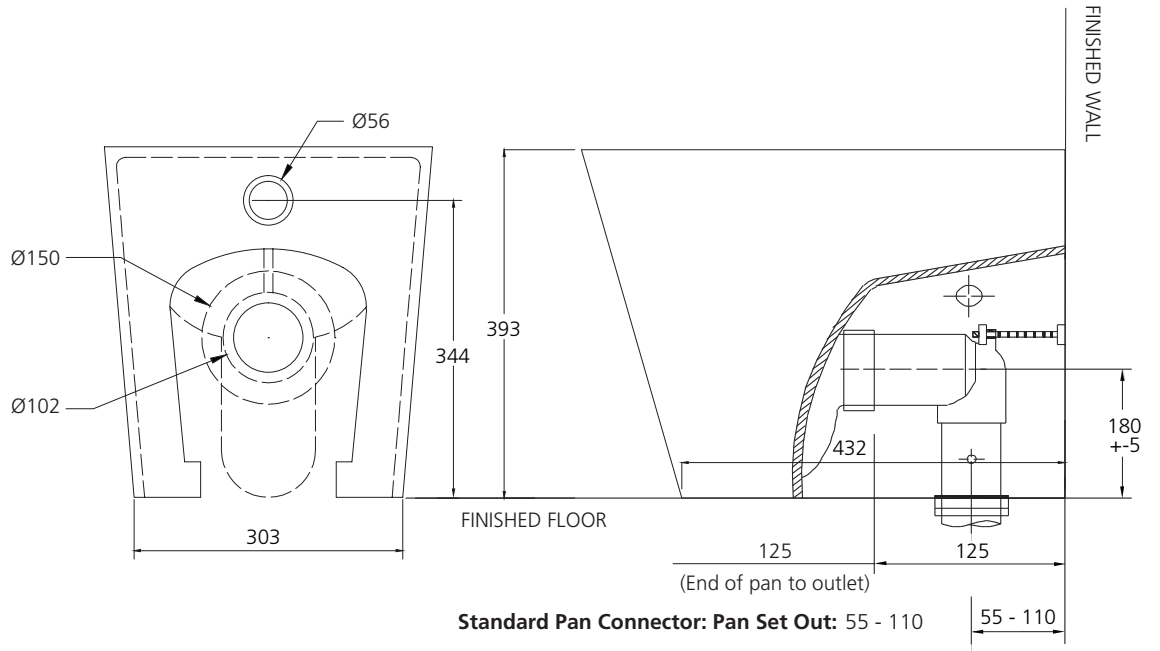

OPTIONAL SET OUT DRAWING

