

# avenir<sup>®</sup>

## Technical Specifications

VERSION 2022.03



# Verso

## Heated & Non-Heated Towel Rails

### VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH4-50	Use heated version	40 x 500 mm	1 to 5	10 Watts
TRH4-77	Use heated version	40 x 770 mm	1 to 5	20 Watts

### NOTES

- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- Transformer required - TRTR200-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm<sup>2</sup> - Do not exceed 5 meters in length.

### STANDARD FINISHES

**Mirror Polished**

Stainless Steel

RRP

**Brushed**

Stainless Steel

+20% (Stocked)

**Matt Black/White**

Painted

+40% (Stocked)

**Gunmetal**

PVD

+50% (Stocked)

**Brushed Gold**

PVD

+60% (Stocked)

### SPECIFICATIONS

**Voltage**

24 Volts

**Material**

Stainless Steel 304

**Finish**

Mirror Polished

**Ingress Protection**

IPX5 (Suitable for wet areas)

**Standards**

AS/NZ 60335.2.43

**Electrical Connection**

Concealed Wiring only - any leg

**Heating Method**

Dry Internal Heating Element

**Required / Sold Separately**

Transformer (TRTR200-24V)

DEVELOPED IN  
**AUSTRALIA**




HEATING TIME  
**30 MINUTES**



WARRANTY  
**10 YEAR**



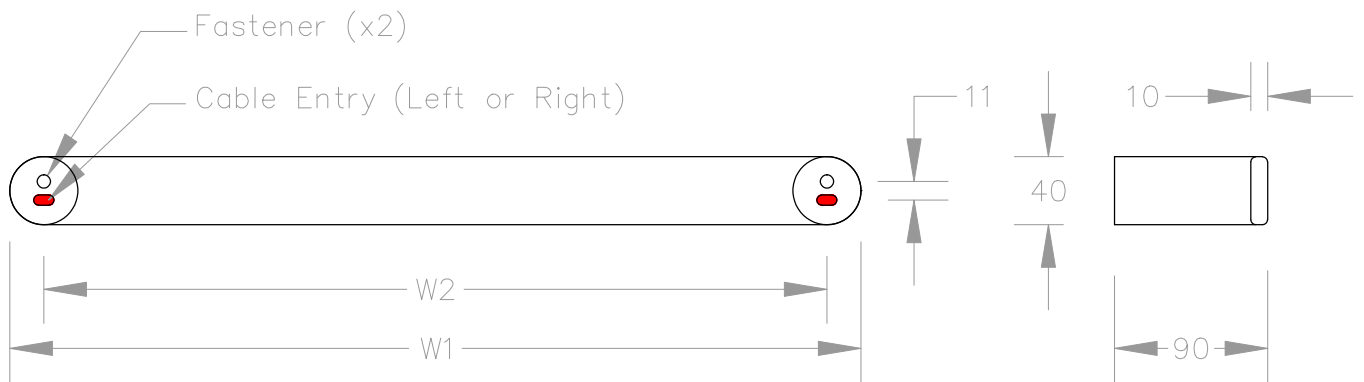

## VARIATIONS

Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH4-50	40mm	500mm	460mm
TRH4-77	40mm	770mm	730mm