

ECO1000FPEXP

Combination Shower and Eye Wash

ECOSAFE Combination Floor-Mounted Shower and Eye Wash with Stainless Steel Bowl and Foot Pedal


Technical Information:

Material	304 Stainless Steel
Outlet (Shower)	Drench Shower Min. 75.7Lpm
Outlet (Eye Wash)	Laminar Flow Min. 11.4Lpm
Working Pressure	200kpa - 500kpa
Working Temp.	16°C - 38°C
Colour	Stainless Steel (Polished)
Servicing	Regular
Warranty	5 Years*



Features:

- Signs included with product
- Laminar flow in eye wash uses zero vertical velocity to provide gentler experience
- Water distribution pattern in shower head and the flow holes are designed to prevent any lime build up or restrictions
- Shower spray has a minimum diameter of 50.8cm for complete coverage
- Valves available for temperatures in excess of 38°C
- Gentec can customize products to suit customer requirements
- Recommended for Science, Education and Industrial projects

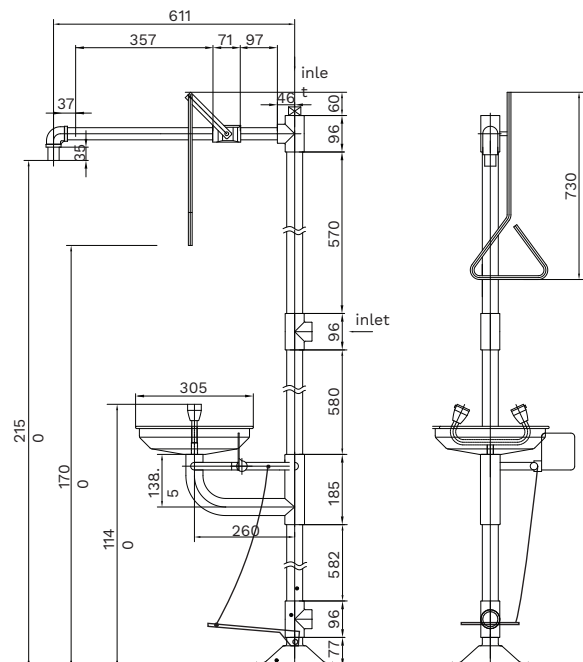

Performance Standards and Approvals:

- ISO Type 5 AS4775 : 2007 - License AMI74767

